

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 9/06, 9/02, 1/02, 7/06	A1	(11) International Publication Number: WO 97/09859
		(43) International Publication Date: 13 March 1997 (13.03.97)

(21) International Application Number: PCT/GB96/02167

(22) International Filing Date: 2 September 1996 (02.09.96)

(30) Priority Data:

① 9517918.0 ✓	2 September 1995 (02.09.95) ✓	GB ✓
② 9522281.6 ✓	31 October 1995 (31.10.95) ✓	GB ✓
③ 9606836.6 ✓	30 March 1996 (30.03.96) ✓	GB ✓

(71) Applicant (for all designated States except US): VERITY GROUP PLC [GB/GB]; Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ① AZIMA, Henry [CA/GB]; 3 Sophacre Close, Chaucer Road, Cambridge CB2 2TT (GB); ② COLLOMS, Martin [GB/GB]; 22 Burgess Hill, London NW2 2DA (GB); ③ HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB).

(74) Agent: MAGUIRE & CO.; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report. ✓
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

3 PDs.

1 applⁿ. (pls see
PF 23 of 2 Sep 1999)

3 Invs.

(54) Title: INERTIAL VIBRATION TRANSDUCERS ✓

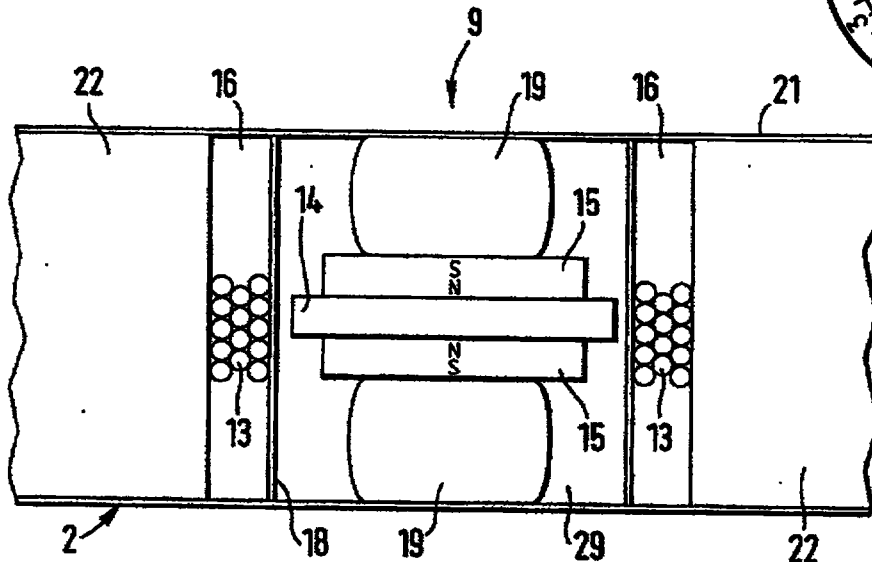

(57) Abstract

An inertial vibration transducer (9) characterised by a motor coil assembly comprising a tubular member (18) and a coil (13) rigidly fixed to the tubular member, and by a magnet assembly (15) disposed concentrically within the motor coil, and resilient means (19) supporting the magnet assembly for axial movement relative to the motor coil, the motor coil and tubular member being adapted to be rigidly mounted to a distributed mode radiator (2).

