

11 MAR 1999

8901318-7

IPOS




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 21/00, 25/00, 25/10	A1	(11) International Publication Number: WO 98/11315 (43) International Publication Date: 19 March 1998 (19.03.98)
(21) International Application Number: PCT/SE97/01542 (22) International Filing Date: 12 September 1997 (12.09.97) (30) Priority Data: 9603341-0 15 September 1996 (15.09.96) SE (71) Applicant (for all designated States except US): AB FAS LÄSFABRİK [SE/SE]; P.O. Box 60, S-631 02 Eskilstuna (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): HIRVI, Jorma [SE/SE]; Tunavägen 29, S-640 43 Årja (SE). (74) Agents: ESTREEN, Lars et al.; Kransell & Wennborg AB, P.O. Box 27834, S-115 93 Stockholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, <u>SG</u> , SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: A LEVER LOCK UNIT

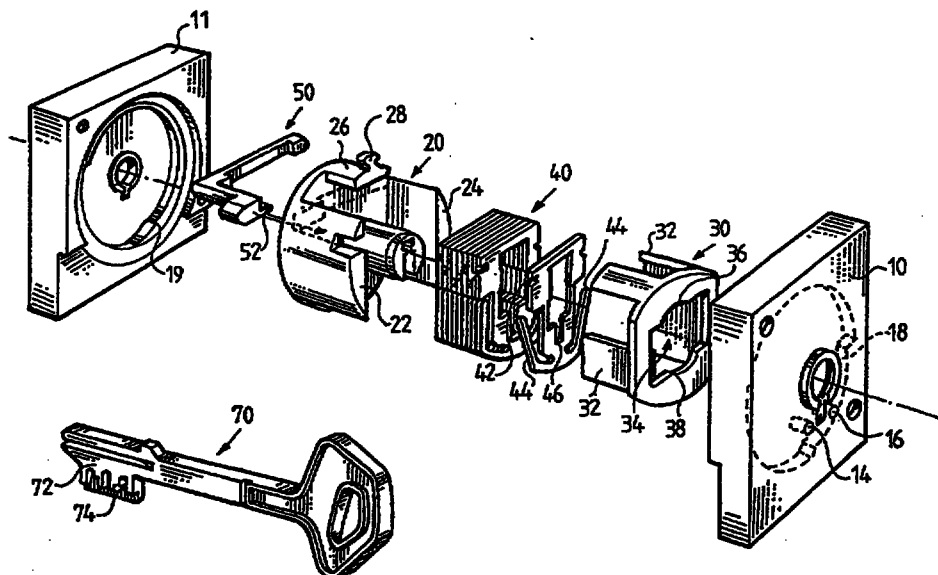

(57) Abstract

A lever lock unit (2) includes a housing (10, 12), a dogging element (20) adapted to actuate a lock bolt (82, 84), a plurality of lever tumblers (40) that are actuable via the dogging element and movable relative thereto, and a blocking element (50) for blocking movement of the dogging element in the absence of a key or when the wrong key is inserted in the unit. The unit is characterized by cradle (30) accommodated in the dogging element (20) and adapted to receive the lever tumblers (40). The dogging element (20) is rotatable and is adapted so that when rotated, the cradle (30) accommodated in the dogging element, and there with also the lever tumblers accommodated in the cradle, will be caused to move linearly in relation to the dogging element and in relation to a key (70) inserted into the unit, for movement of the lever tumblers (40) to a blocking element release position when the correct key is inserted.