

FIG. 1

Receive higher layer signaling, where the higher layer signaling includes configuration information of a CORESET-BFR configured for a terminal device, and the configuration information of the CORESET-BFR includes at least one of the following: a cell index of a cell on which the CORESET-BFR is located and a BWP index of a BWP on which the CORESET-BFR is located

S210

FIG. 2

Send higher layer signaling, where the higher layer signaling includes configuration information of a CORESET-BFR configured for a terminal device, and the configuration information of the CORESET-BFR includes at least one of the following: a cell index of a cell on which the CORESET-BFR is located and a BWP index of a BWP on which the CORESET-BFR is located

S310

FIG. 3




FIG. 4




FIG. 5

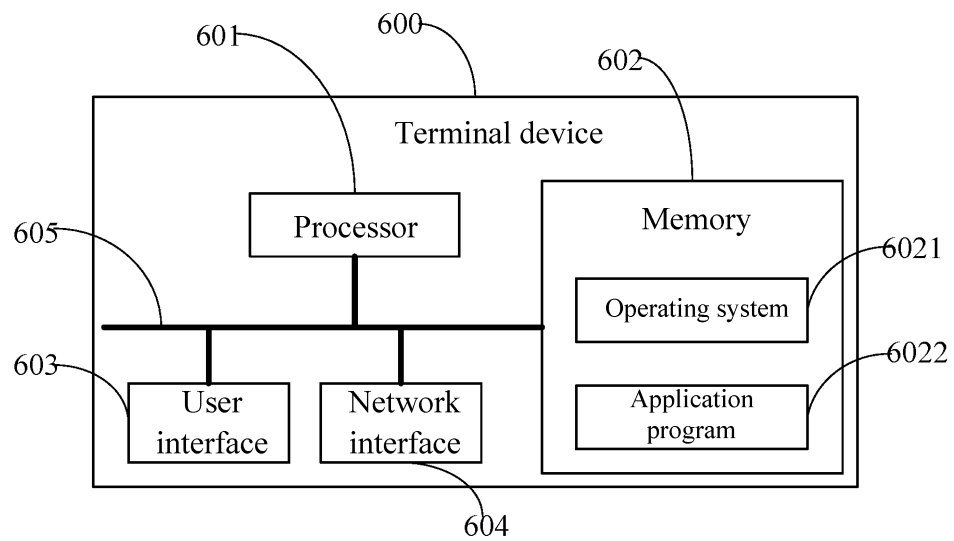


FIG. 6

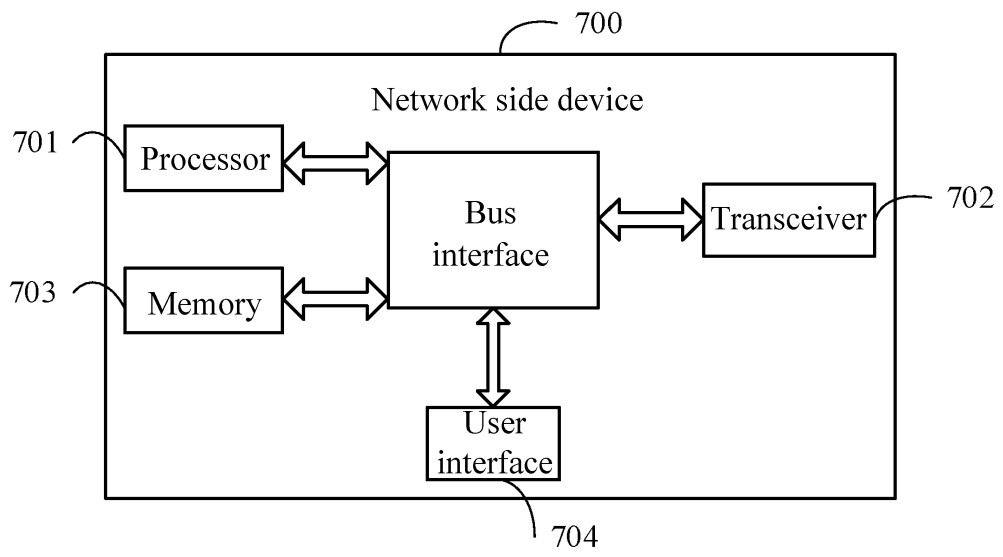


FIG. 7