

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2025 年 4 月 3 日 (03.04.2025)



(10) 国际公布号
WO 2025/067525 A1

(51) 国际专利分类号:
H04N 21/44 (2011.01)

(21) 国际申请号: PCT/CN2024/122066

(22) 国际申请日: 2024 年 9 月 27 日 (27.09.2024)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202311285126.3 2023 年 9 月 28 日 (28.09.2023) CN

(71) 申请人: 北京字跳网络技术有限公司
(**BEIJING ZITIAO NETWORK TECHNOLOGY CO., LTD.**) [CN/CN]; 中国北京市海淀区紫金数码园 4 号楼 2 层 0207 100190 (CN)。

(72) 发明人: 李立天 (**LI, Litian**); 中国北京市朝阳区七圣中街 12 号院融中心 B1 小邮局 100028 (CN)。高洪敏 (**GAO, Hongmin**); 中国北京市朝阳区七圣中街 12 号院融中心 B1 小邮局 100028 (CN)。练焱

明 (**LIAN, Yanming**); 中国北京市朝阳区七圣中街 12 号院融中心 B1 小邮局 100028 (CN)。


(74) 代理人: 北京世辉律师事务所 (**SHIHUI PARTNERS**); 中国北京市朝阳区建国门外大街 2 号北京银泰中心 C 座 42 层 100022 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE,

(54) **Title:** TRANSITION EFFECT PROCESSING METHOD AND APPARATUS, ELECTRONIC DEVICE, AND STORAGE MEDIUM

(54) 发明名称: 转场特效处理方法、装置、电子设备以及存储介质

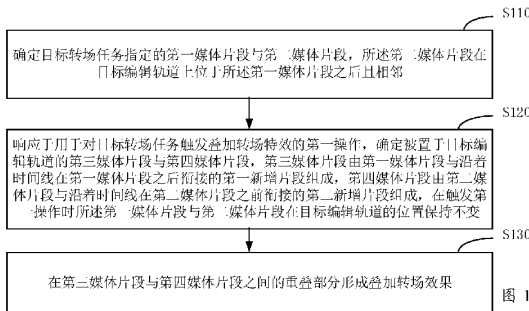

(57) **Abstract:** Embodiments of the present disclosure provide a transition effect processing method and apparatus, an electronic device, and a storage medium. The method comprises: determining a first media segment and a second media segment specified in a target transition task; in response to a first operation used to trigger an overlay transition effect for the target transition task, determining a third media segment and a fourth media segment placed on a target editing track, wherein the third media segment is composed of the first media segment and a first newly added segment spliced after the first media segment, and the fourth media segment is composed of the second media segment and a second newly added segment spliced before the second media segment; and forming an overlay transition effect in an overlapping portion between the third media segment and the fourth media segment. In the present solution, the total duration of two adjacent media segments after the overlay transition effect can remain unchanged.

- S110 Determine a first media segment and a second media segment specified in a target transition task, wherein the second media segment is located after and adjacent to the first media segment in a target editing track
- S120 In response to a first operation used to trigger an overlay transition effect for the target transition task, determine a third media segment and a fourth media segment placed on the target editing track, wherein the third media segment is composed of the first media segment and a first newly added segment spliced after the first media segment in a timeline, the fourth media segment is composed of the second media segment and a second newly added segment spliced before the second media segment in the timeline, and the positions of the first media segment and the second media segment in the target editing track remain unchanged when the first operation is triggered
- S130 Form an overlay transition effect in an overlapping portion between the third media segment and the fourth media segment

图 1

WO 2025/067525 A1

[见续页]

BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR,
HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO,
PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN,
TD, TG)。

本国际公布：
— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 本公开实施例提供了一种转场特效处理方法、装置、电子设备以及存储介质。所述方法包括确定目标转场任务指定的第一媒体片段与第二媒体片段; 响应于用于对目标转场任务触发叠加转场特效的第一操作, 确定被置于目标编辑轨道的第三媒体片段与第四媒体片段, 第三媒体片段由第一媒体片段与在第一媒体片段之后衔接的第一新增片段组成, 第四媒体片段由第二媒体片段与在第二媒体片段之前衔接的第二新增片段组成; 在第三媒体片段与第四媒体片段之间的重叠部分形成叠加转场效果。本方案能实现在进行叠加转场特效后的相邻两个媒体片段的总时长能够保持不变。