



(43) International Publication Date
11 April 2013 (11.04.2013)

- (51) International Patent Classification:
F16L 13/02 (2006.01)
- (21) International Application Number:
PCT/US2012/058713
- (22) International Filing Date:
4 October 2012 (04.10.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/543,247 4 October 2011 (04.10.2011) US
- (71) Applicant: **FLEXSTEEL PIPELINE TECHNOLOGIES, INC.** [US/US]; 2103 Citywest Blvd., Suite 1450, Houston, TX 77042 (US).
- (72) Inventors; and
- (71) Applicants (*for US only*): **HEGLER, Matthew, Allen** [US/US]; 2103 Citywest Blvd., Suite 1450, Houston, TX 77042 (US). **HEATON, Andrew, James** [GB/—]; Kiln Lane, Stallingborough, Grimsby (GB).
- (74) Agent: **LIMBACH, Alan, A.**; DLA Piper LLP US, 2000 University Avenue, East Palo Alto, CA 94303 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: PIPE END FITTING WITH IMPROVED VENTING

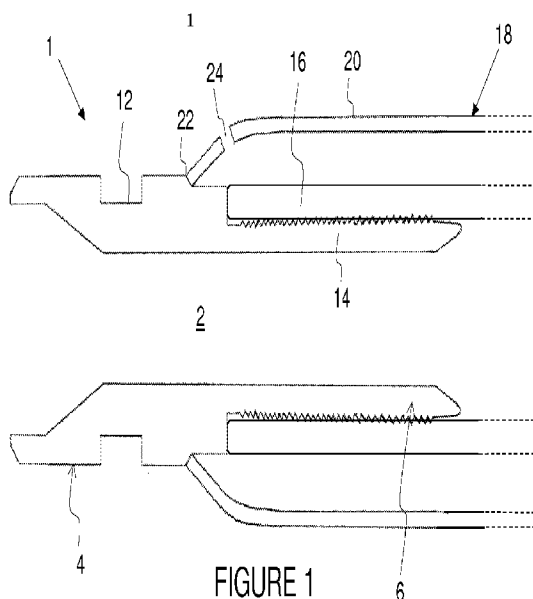


FIGURE 1

(57) Abstract: A pipe end fitting assembly that includes an outer body having an outer surface, an inner surface defining a first bore, and an end surface, and an inner body having an inner surface defining a second bore and an outer surface. A portion of the inner body outer surface is secured to the outer body inner surface. A passage formed in the outer body includes a first portion extending from the end surface and parallel to the first bore, and a second portion extending from the outer body outer surface to the passage first portion. A pipe end is disposed around and secured to a portion of the inner body outer surface. A jacket is disposed around the pipe and has an end secured to the outer body outer surface. The passage portions are in fluid communication with each other and a space between the jacket and the pipe.



WO 2013/052639 A2