



(51) International Patent Classification:
E21B 19/24 (2006.01) *E21B 7/08* (2006.01)

(21) International Application Number:
PCT/US2013/068069

(22) International Filing Date:
1 November 2013 (01.11.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/872,655 31 August 2013 (31.08.2013) US

(71) Applicant: HALLIBURTON ENERGY SERVICES,
INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas
77072 (US).

(72) Inventor: LAJESIC, Borisa; 5616 Preston Oaks, # 601,
DALLAS, TX 75254 (US).


(74) Agents: ROSE, Collin, A. et al.; Chamberlain, Hrdlicka,
White, Williams & Aughtry, 1200 Smith St., 14th Floor,
Houston, TX 77002 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: DEFLECTOR ASSEMBLY FOR A LATERAL WELLBORE

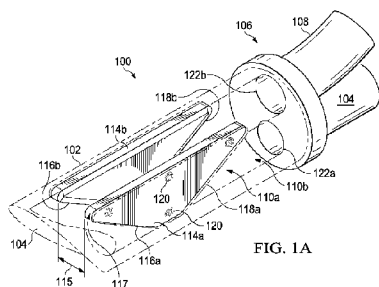

(57) Abstract: A deflector assembly includes an upper deflector arranged within a main bore of a wellbore, the upper deflector having first and second plates spaced apart by a distance. At least one of the first and second plates includes a ramped surface. A lower deflector is arranged within the main bore, the lower deflector defining a first conduit and a second conduit. One of the first and second conduits is in communication with a lower portion of the main bore and another of the first and second conduits is in communication with a lateral bore. The upper and lower deflectors are configured to direct a bullnose assembly into either the lateral bore or the lower portion of the main bore based on a size of a bullnose tip of the bullnose assembly.

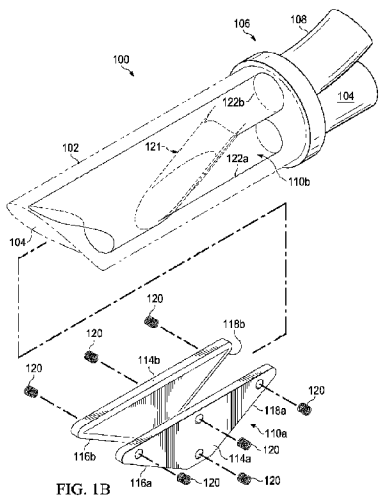



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).