



(43) International Publication Date
15 March 2012 (15.03.2012)

- (51) International Patent Classification:
H02K 5/173 (2006.01) *H02K 15/00* (2006.01)
- (21) International Application Number:
PCT/JP2011/004632
- (22) International Filing Date:
19 August 2011 (19.08.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2010-202100 9 September 2010 (09.09.2010) JP
- (71) Applicant (for all designated States except US): **KA-BUSHIKI KAISHA TOSHIBA** [JP/JP]; 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **NAGAYAMA, Takashi. SHIRAISHI, Shigetomo.**
- (74) Agent: **SAGOI, Masayuki**; c/o TOSHIBA TECHNO CENTER INC., 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
21 March 2013

(54) Title: MOTOR

[Fig. 1]

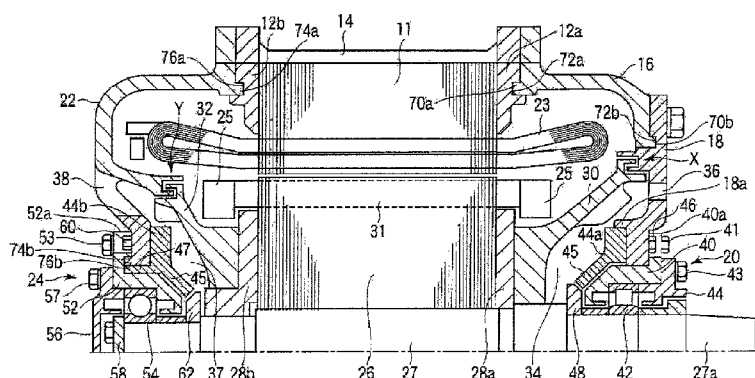

(57) Abstract: According to one embodiment, a motor has a cylindrical stator core and a rotor. A first framework is fixed to a side of the stator core in an axial direction, and a first bearing housing is fixed to the outside of the first framework. A second framework is fixed to the other side of the stator core, and a second bearing housing is fixed to the outside of the second framework. The rotor has a rotational shaft, supported by the bearings, extending into the frameworks. A rotor core is attached to the shaft. Support bases are fixed to the rotor, and are interposed by the rotor core. A locking member coupled to the first framework is configured to contact and the first support base. A locking member coupled to the second framework is configured to contact the second support base. The rotor is fixed by the locking members contact with the support bases.