

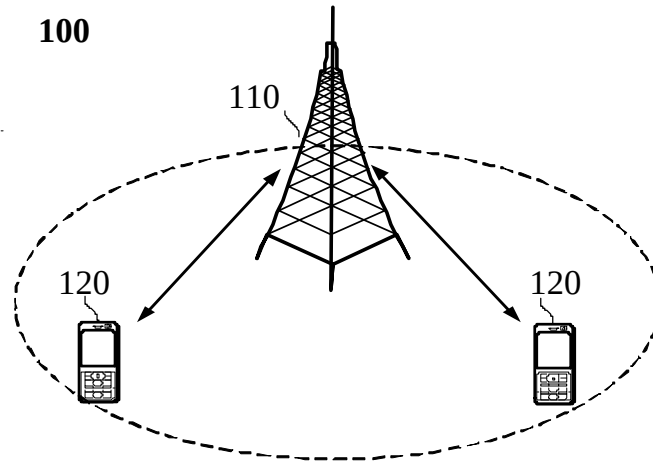


FIG. 1

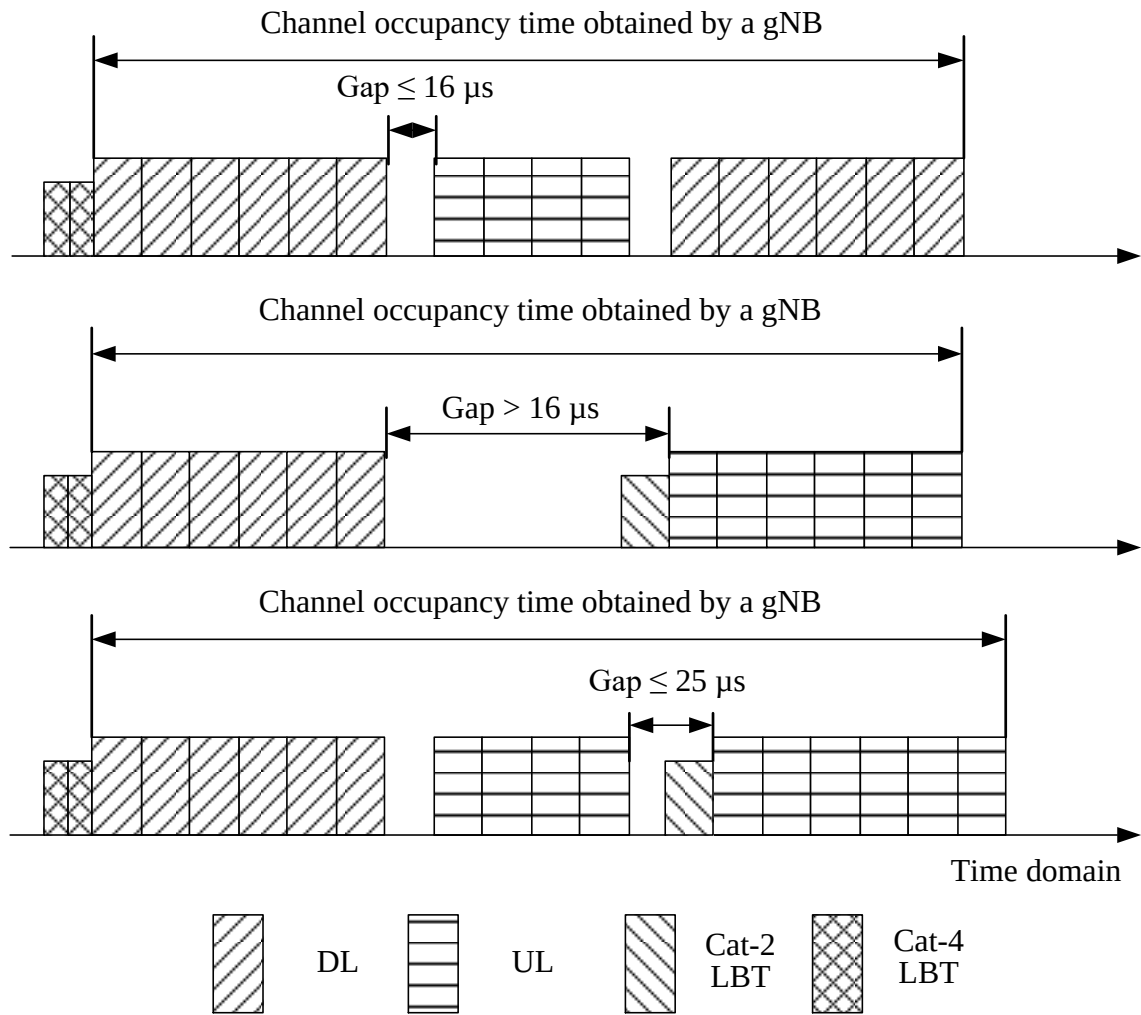


FIG. 2

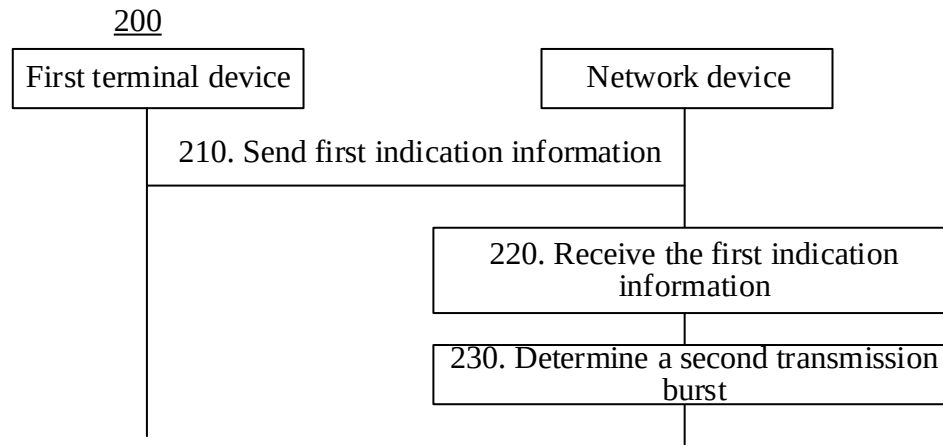


FIG. 3

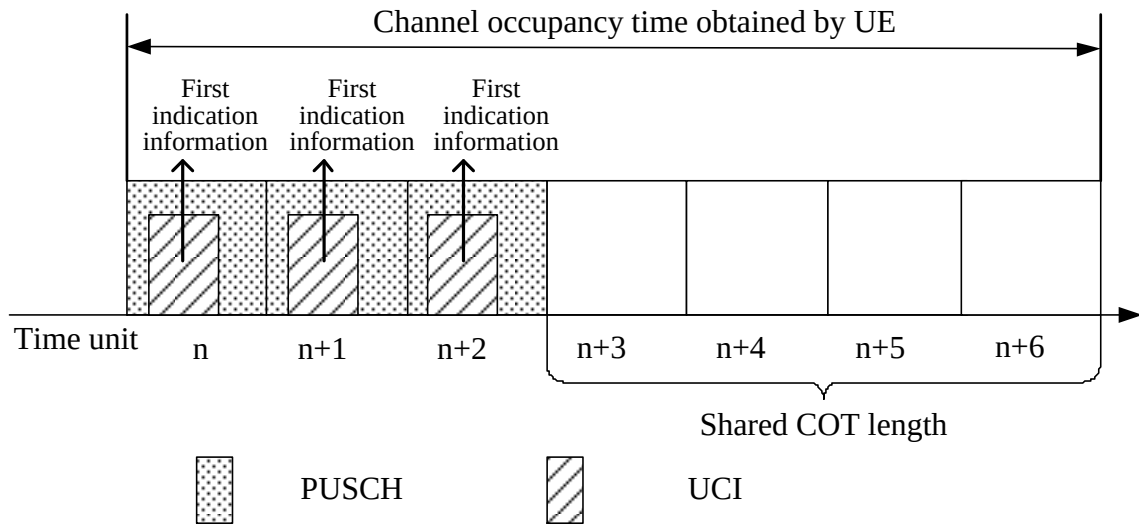


FIG. 4

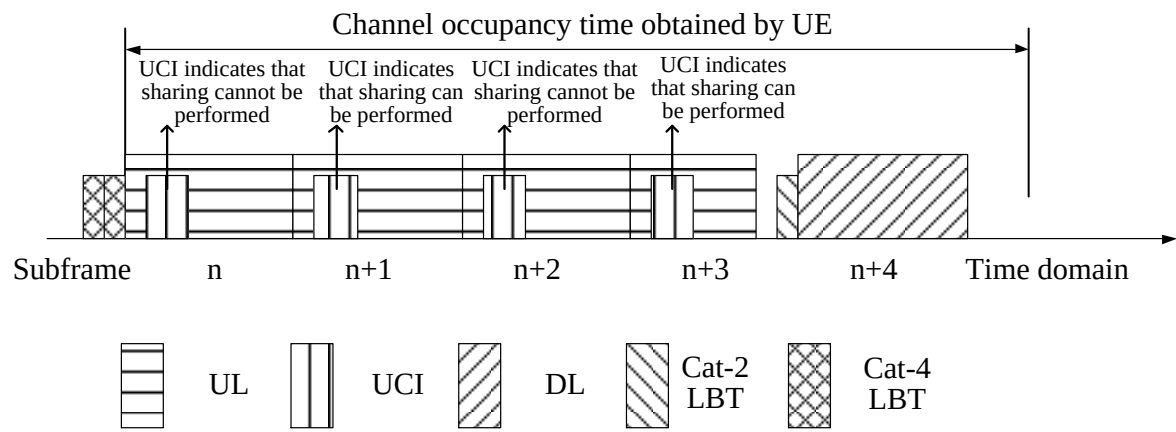


FIG. 5

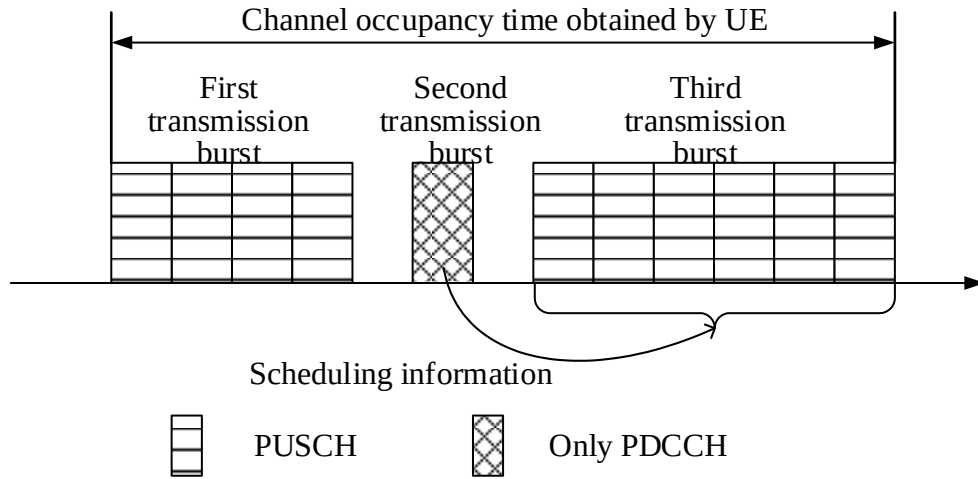


FIG. 6

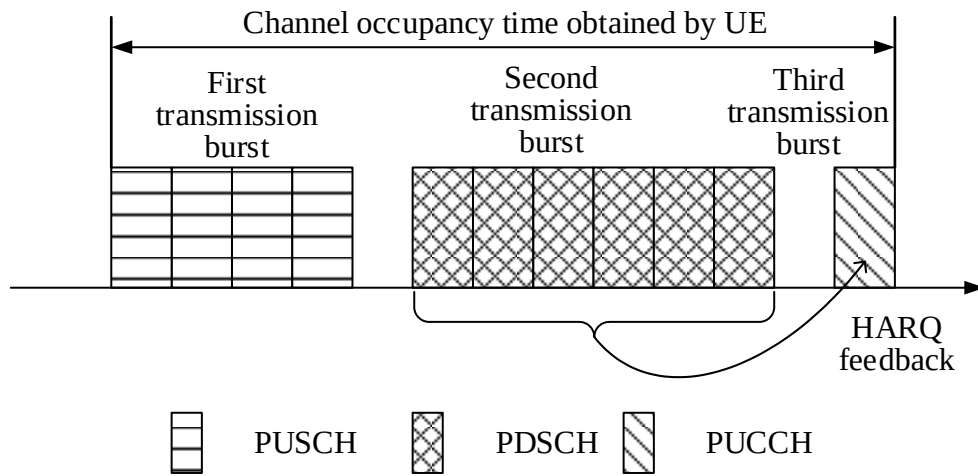


FIG. 7

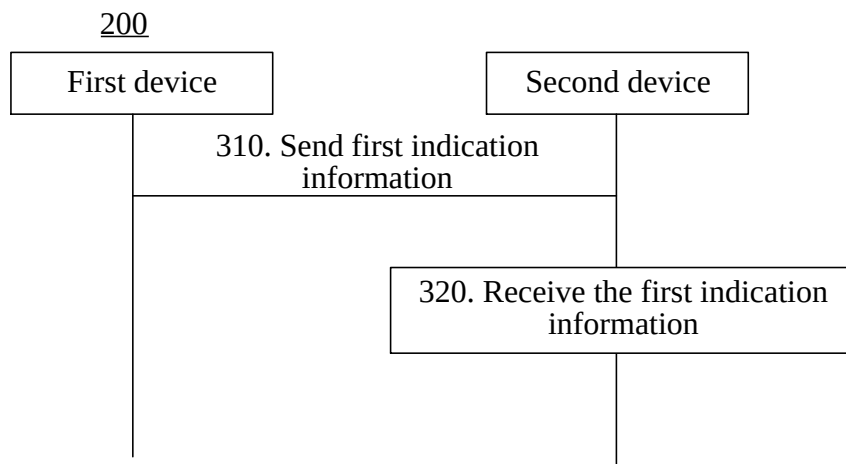


FIG. 8

400

Perform channel detection in first detection duration on an unlicensed spectrum, where the first detection duration is greater than 16 microseconds and is less than or equal to 25 microseconds, the first detection duration includes at least one detection slot, and the detection slot is located at a head end or a tail end of the first detection duration

410

FIG. 9

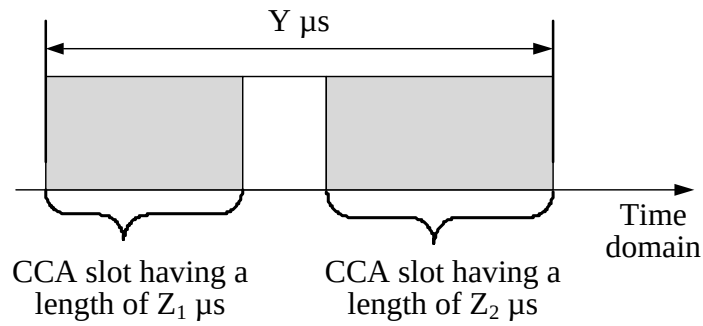


FIG. 10

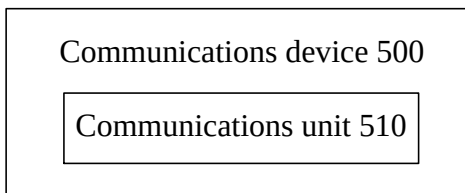


FIG. 11

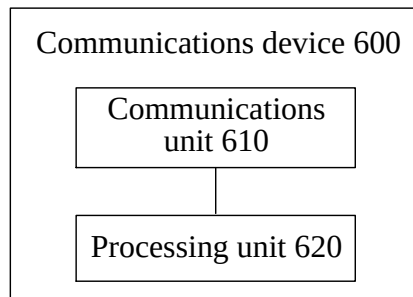


FIG. 12

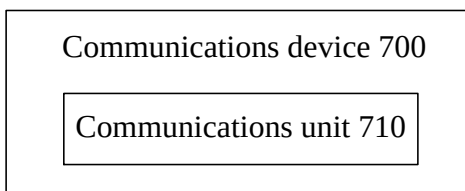


FIG. 13

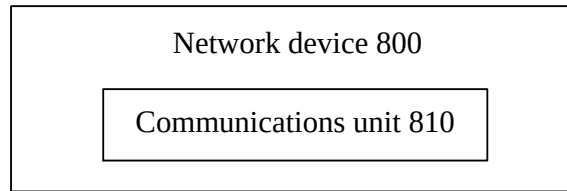


FIG. 14

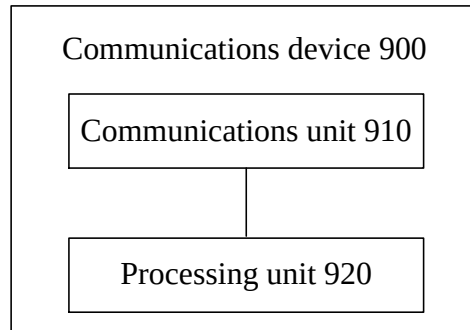


FIG. 15

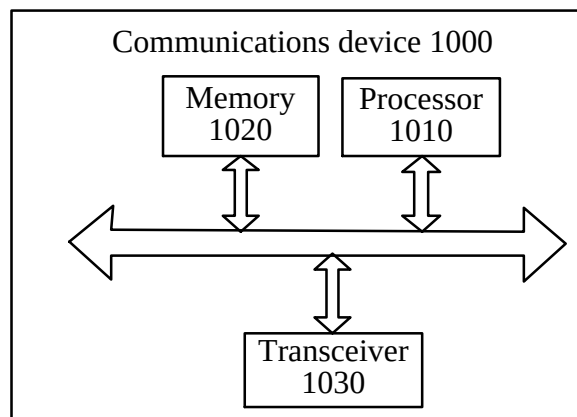


FIG. 16

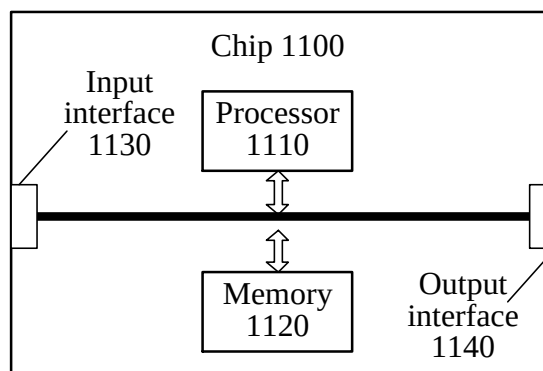


FIG. 17