



(51) International Patent Classification:

B63B 25/28 (2006.01) B63B 25/00 (2006.01)

(21) International Application Number:

PCT/FI2013/050731

(22) International Filing Date:

3 July 2013 (03.07.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20135708 27 June 2013 (27.06.2013) FI

(71) Applicant: CARGOTEC FINLAND OY [FI/FI]; P.o.box 387, Ruskontie 55, FI-33101 Tampere (FI).

(72) Inventor: MIKKOLA, Juha; Puhontie 354, FI-21860 Auvainen (FI).

(74) Agent: HEINÄNEN OY; Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: LASHING BRIDGE FOR A CARGO SHIP

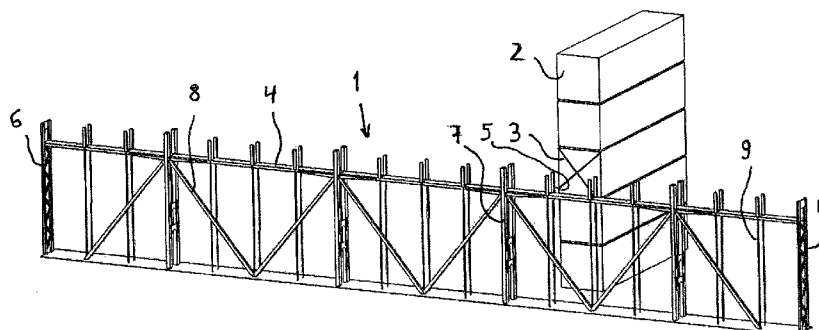


FIG. 4

(57) Abstract: Lashing bridge (1) for a cargo ship for supporting containers (2) during transport, which lashing bridge (1) is installed on the deck of the cargo ship in the transverse direction of the cargo ship, and which lashing bridge (1) comprises fixing points (5) for fixing lashing bars (3) to it, which lashing bars (3) are fixed at their other end to the containers (2). The invention is implemented in such a way that at least one tension bar (9) is fixed to the lashing bridge (1) for conveying essentially only the upward forces exerted on the lashing bridge (1) by the lashing bars (3) to the hull of the cargo ship.