

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 August 2010 (12.08.2010)

PCT

(10) International Publication Number  
**WO 2010/089445 A1**

(51) International Patent Classification:  
*H04W 76/00* (2009.01) *H04L 29/06* (2006.01)  
*H04M 7/00* (2006.01)

(21) International Application Number:  
PCT/FI2009/050999

(22) International Filing Date:  
14 December 2009 (14.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PCT/EP2009/051263  
4 February 2009 (04.02.2009) EP

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MAYER, Georg** [AT/AT]; Erdberstrasse 89/20, A-1030 Wien (AT). **MUTIKAINEN, Jari** [FI/FI]; Isoniitynkujja 27, FI-01830 Lepsämä (FI). **LEIS, Peter** [DE/FI]; c/o Nokia Corporation, Keilalahdentie 4, FI-02150 Espoo (FI).

(74) Agent: **NOKIA CORPORATION**; IPR Department, Virpi Tognetty, Keilalahdentie 4, FI-02150 Espoo (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ACCESS CHANGE FOR RE-ROUTING A CONNECTION

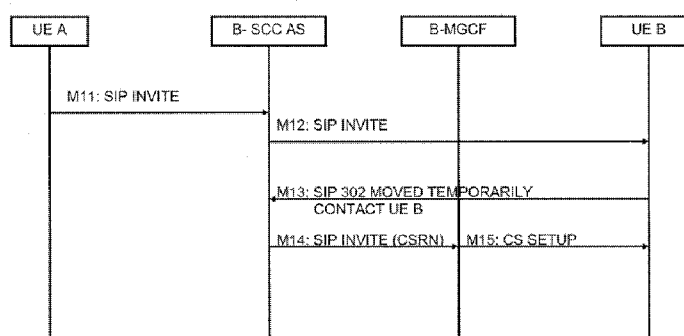


FIG. 1

(57) Abstract: There is proposed a method and corresponding apparatuses allowing a change from a packet switched communication domain to a circuit switched communication domain. When a user equipment as a connection terminating point receives a connection initialization message with a media flow, such as audio, which cannot be delivered by the packet switched access, it sends a specific response rejecting the connection via the packet switched access to an application server for service centralization and continuity. In the application server, it is checked whether several conditions are met in order to determine whether the communication connection comprising the media flow is allowed to be changed to the circuit switched domain. If yes, the communication connection is changed from the packet switched communication domain to the circuit switched communication domain.



WO 2010/089445 A1