

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 October 2006 (26.10.2006)

PCT

(10) International Publication Number
WO 2006/110958 A1

- (51) International Patent Classification:
E05B 47/06 (2006.01) *E05B 47/00* (2006.01)
- (21) International Application Number:
PCT/AU2006/000533
- (22) International Filing Date: 21 April 2006 (21.04.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2005902029 21 April 2005 (21.04.2005) AU
- (71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LIMITED** [AU/AU]; 50 Edward Street, Oakleigh, Victoria 3166 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KORVIN, Chris** [AU/AU]; 2 Tallis Drive, Mornington, Victoria 3931 (AU).
- (74) Agent: **PHILLIPS ORMONDE & FITZPATRICK**; Levels 21 & 22, 367 Collins Street, Melbourne, Victoria 3000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: ELECTRIC LOCK SYSTEM

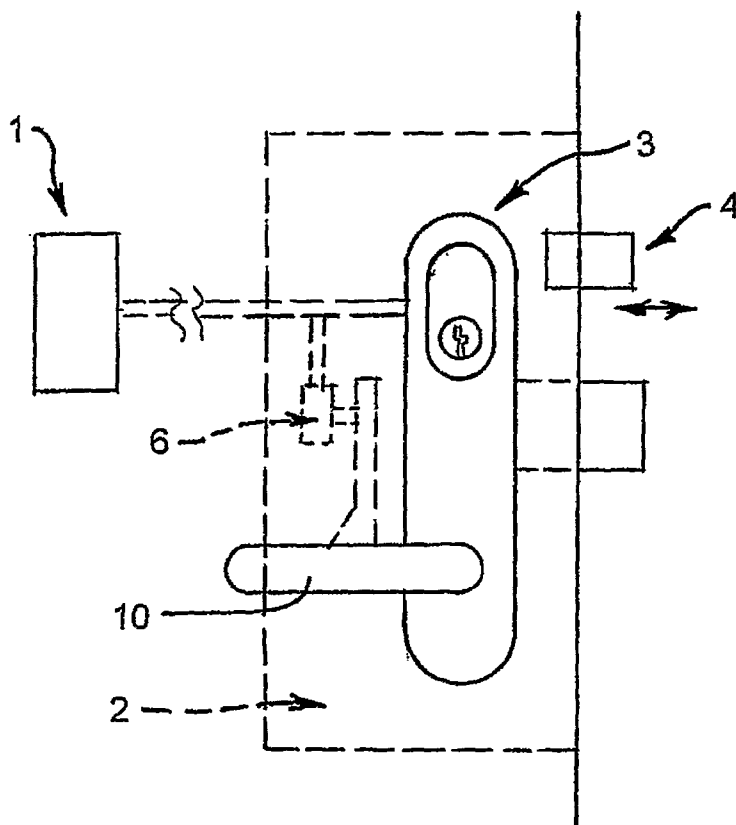

(57) Abstract: This invention relates to an electric lock system including a remote processor (1), connected to an electric lock assembly (2), and a reader assembly (3) connected to the electric lock assembly (2). The reader assembly (3) includes an antenna (26) which receives a user signal emitted by a key tag (4). Connecting the reader assembly (3) to the electric lock assembly (2) simplifies the method of installing the system.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.