

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



PCT



(10) 国际公布号

WO 2012/055193 A1

(43) 国际公布日
2012 年 5 月 3 日 (03.05.2012)

(51) 国际专利分类号:
A61H 23/02 (2006.01)

(21) 国际申请号: PCT/CN2011/071113

(22) 国际申请日: 2011 年 2 月 21 日 (21.02.2011)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
201010518308.7 2010 年 10 月 25 日 (25.10.2010) CN

(71) 申请人 (对除美国外的所有指定国): 深圳市轻松科技股份有限公司 (SHENZHEN BREO TECHNOLOGY CO., LTD.) [CN/CN]; 中国广东省深圳市罗湖区深南东路 5033 号金山大厦 2202 室, Guangdong 518000 (CN)。

(72) 发明人: 及

(75) 发明人/申请人 (仅对美国): 马学军 (MA, Xuejun) [CN/CN]; 中国广东省深圳市罗湖区深南东路 5033 号金山大厦 2202 室, Guangdong 518000 (CN)。 李锐 (LI, Rui) [CN/CN]; 中国广东省深圳市罗湖区深南东路 5033 号金山大厦 2202 室, Guangdong 518000 (CN)。

(74) 代理人: 深圳中一专利商标事务所 (SHENZHEN ZHONGYI PATENT AND TRADEMARK OFFICE); 中国广东省深圳市福田区深南中路 1014 号老特区报社四楼西区 (5 号信箱), Guangdong 518028 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

[见续页]

(54) Title: MINI MASSAGE APPARATUS

(54) 发明名称: 迷你按摩器

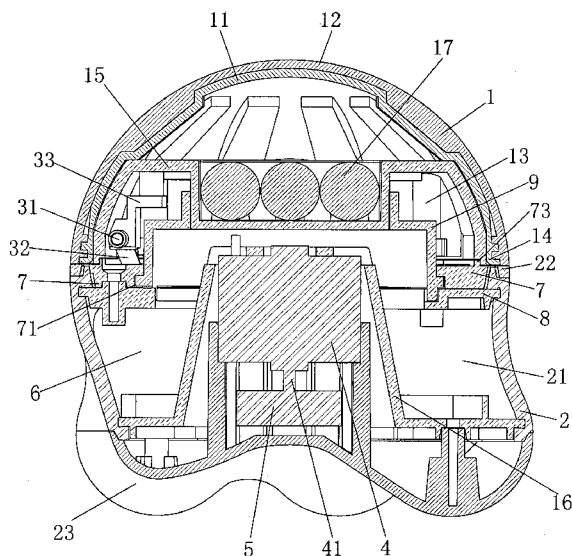


图1 / FIG. 1

(57) Abstract: A mini massage apparatus includes a first housing (1), a second housing (2), a variable resistor (3), a motor (4) and a vibration body (5). The first housing (1) is connected with the second housing (2), both of which form a rotation pair. At least one of the first housing (1) and the second housing (2) is arranged with a massage block (23). An enclosed assembly chamber (6) is defined by the first housing (1) and the second housing (2). The variable resistor (3), the motor (4) and the vibration body (5) are all arranged in the assembly chamber (6). The vibration body (5) is eccentrically fixed on a motor shaft (41) of the motor (4). When the second housing (2) rotates relatively to the first housing (1) around a rotation axis, the resistance of the variable resistor (3) is changed and the rotation rate of the motor (4) is also changed according to the change of the resistance. Thus the vibration strength of the vibration body (5) can be changed so as to enable adjusting of the vibration massage strength.

[见续页]

WO 2012/055193 A1