



- (51) International Patent Classification:
B63B 27/10 (2006.01) *B63B 27/12* (2006.01)
- (21) International Application Number:
PCT/SG2012/000476
- (22) International Filing Date:
14 December 2012 (14.12.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: CDA PROJECTS PTE LTD CO. [SG/SG];
Blk 1 Thomson Road, #03-350d, Singapore 300001 (SG).
- (72) Inventor; and
- (71) Applicant : ONG, Lin Khim [SG/SG]; 88 Seletar Hills
Drive, Singapore 807104 (SG).
- (74) Agent: TAN, Seng Ngee; c/o W. P. LAI & COMPANY, P.
O. Box 0399, PSA Building, Singapore 911144 (SG).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: LOADING AND UNLOADING SYSTEM FOR CONTAINERS AT QUAYSIDE

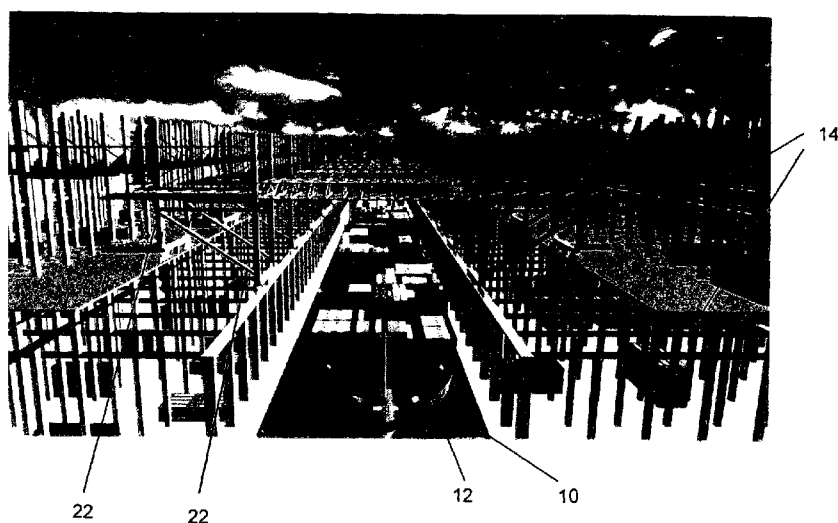

(57) Abstract: A loading and unloading system for containers at quayside is disclosed. The system comprises: (a) a container crane having a lifting means for a container crane for lifting containers from a containership, at least one spreader, a plurality of motors and cables and a plurality of braking means, allowing the upward and downward movement of the spreaders; (b) rail mounted horizontally such that the lifting means is slidingly moveable horizontally along the rails and capable of moving downward and upward; (c) a plurality of leg supports structurally mounted at both side of the indented quayside to support the container crane, wherein the lifting means is permitted to move along the rails. The present invention also relates to a method of loading and unloading system for containers at quayside.