



(51) International Patent Classification:
H05B 37/02 (2006.01)

(21) International Application Number:
PCT/EP2011/057414

(22) International Filing Date:
9 May 2011 (09.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1007727.9 10 May 2010 (10.05.2010) GB

(71) Applicant (for all designated States except US):
GREENLIGHT GROUP LIMITED [—/CN]; 26/F
Wyndham Place, 44 Wyndham Street Central, Hong
Kong (CN).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FOTI, Ivan** [GB/GB];
114 Sheen Road, Richmond Surrey TW9 1UR (GB).

(74) Agent: **KNOTT, Stephen**; Mathisen & Macara, 120
Bridge Road, Chertsey Surrey KT16 8LA (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: LED LIGHTING DEVICES

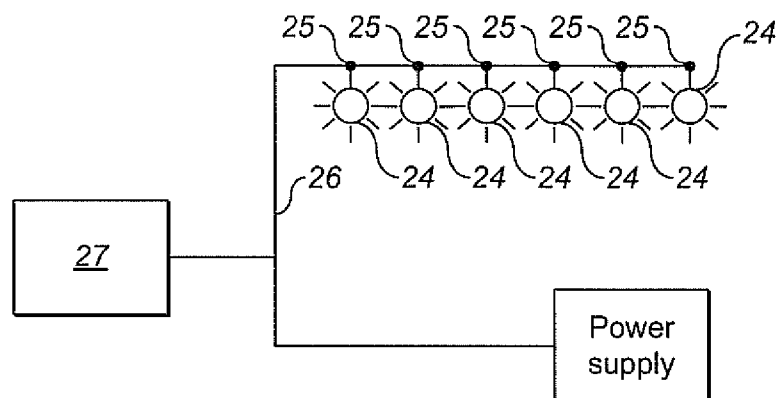


FIG. 3

(57) Abstract: A lighting device includes an LED light source (20) operable by electric power supplied to the device, and a control system (23) receiving electric power from an external power supply (26) and supplying power to the light source (20). The control system (23) also being operable of operating in a second mode to supply power to the light source (20) only on receipt by the control system (23) via the power supply (26) of a signal identifying said device. Thus the device (24) can be incorporated in a conventional lighting circuit or a circuit in which the devices (24) are individually controlled.