

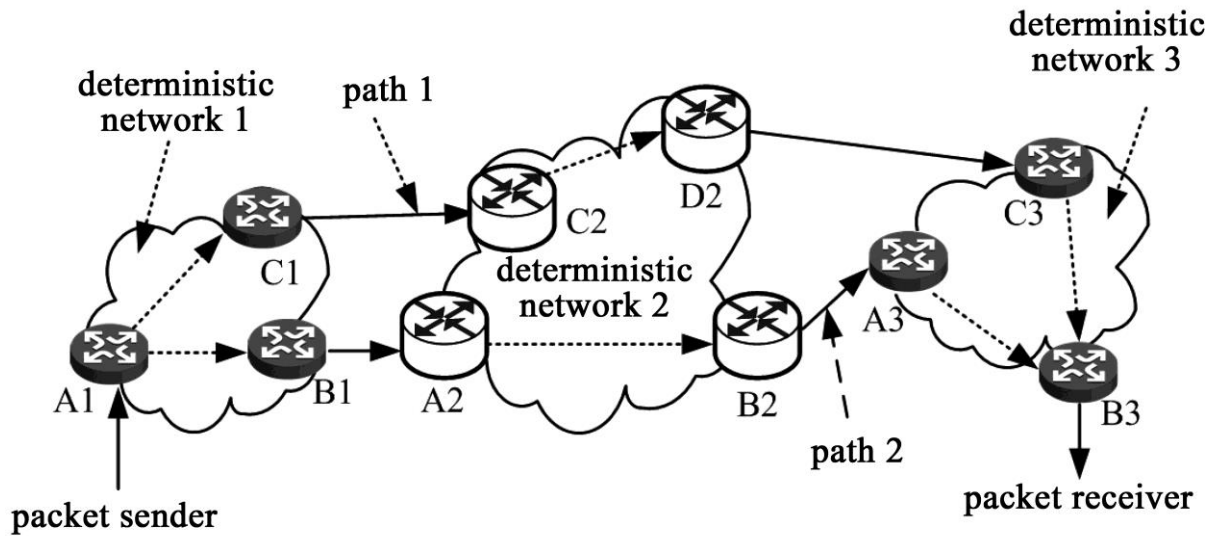


Figure 1

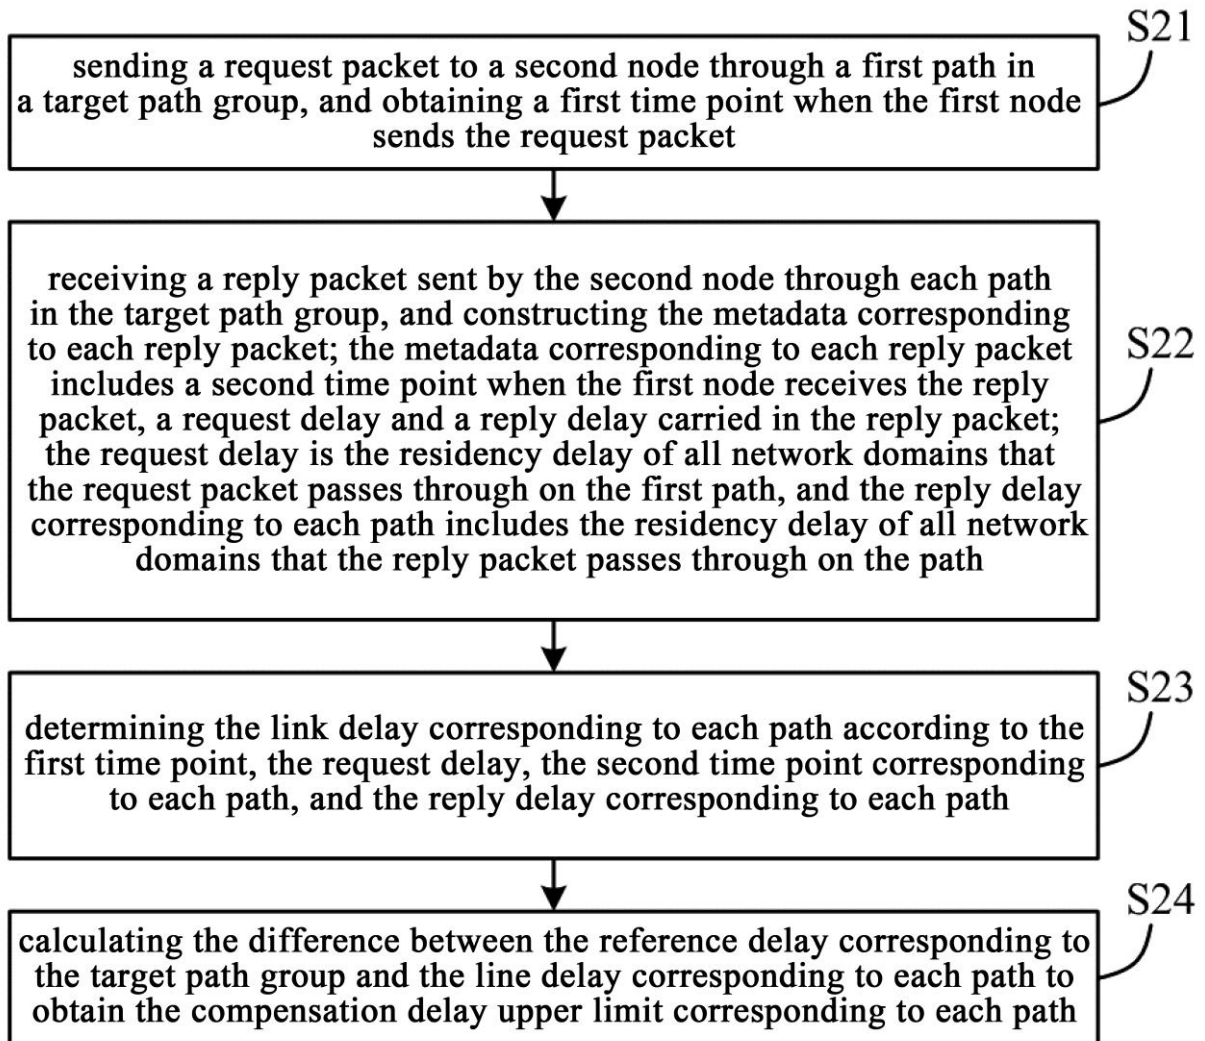


Figure 2

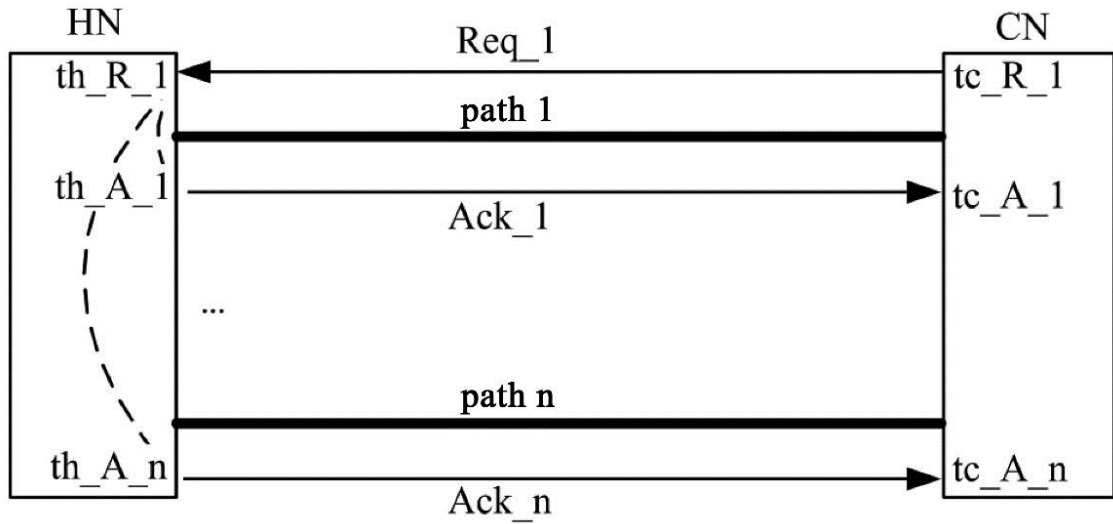


Figure 3

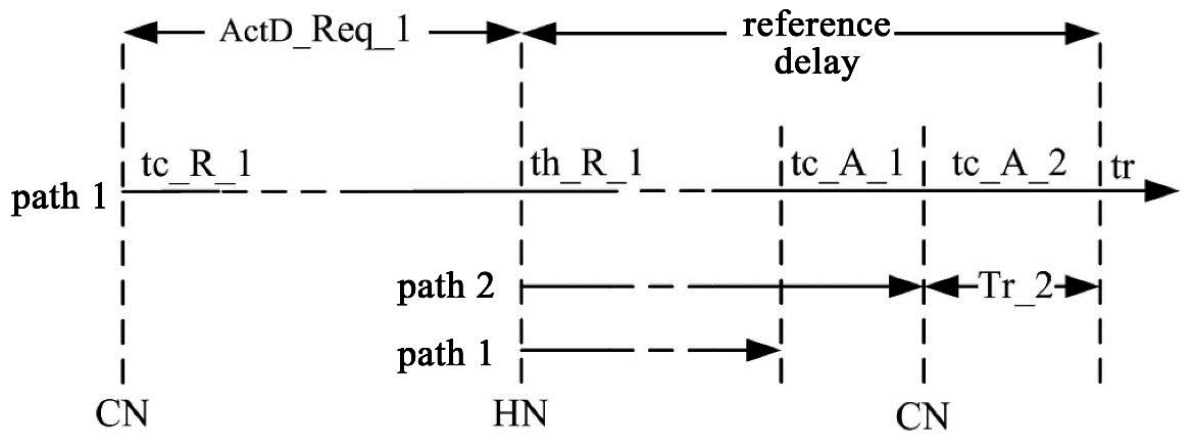


Figure 4

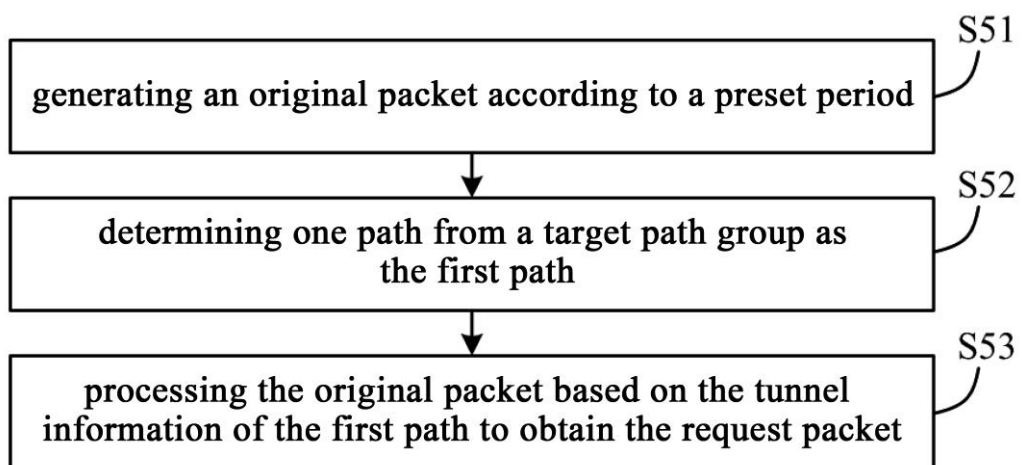


Figure 5

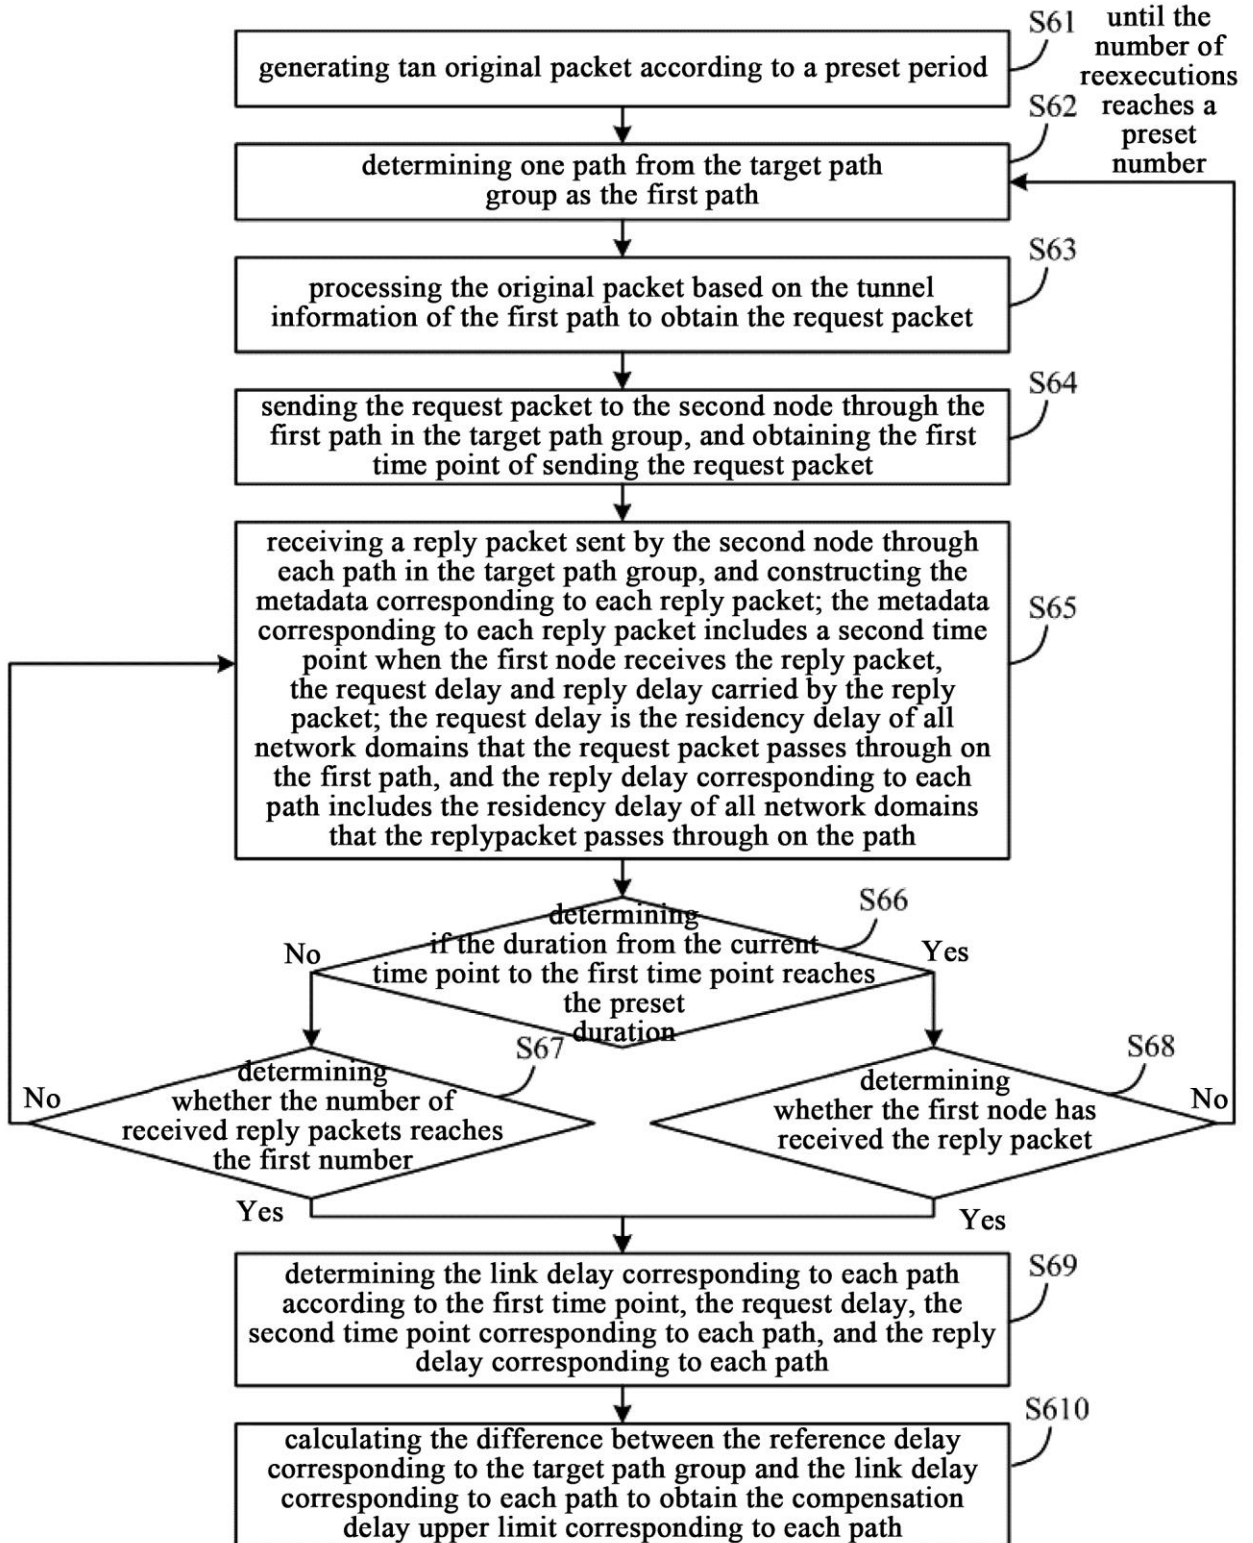


Figure 6

the first table

group ID	number of paths	peer address	preset adjustment delay	reference delay	preset period	preset duration	the first pointer
1	4	20.20.20.20	2	40	1	200	0xffe00080
2	2	...	...	x	...	x	x
3	2	...	...	x	...	x	x
...	...	...	...	...	...	...	...

the second table

path ID	receiving interface ID	tunnel ID	compensation delay upper limit
1	0	1	x
2	1	5	x
3	2	8	x
4	3	10	x

Figure 7

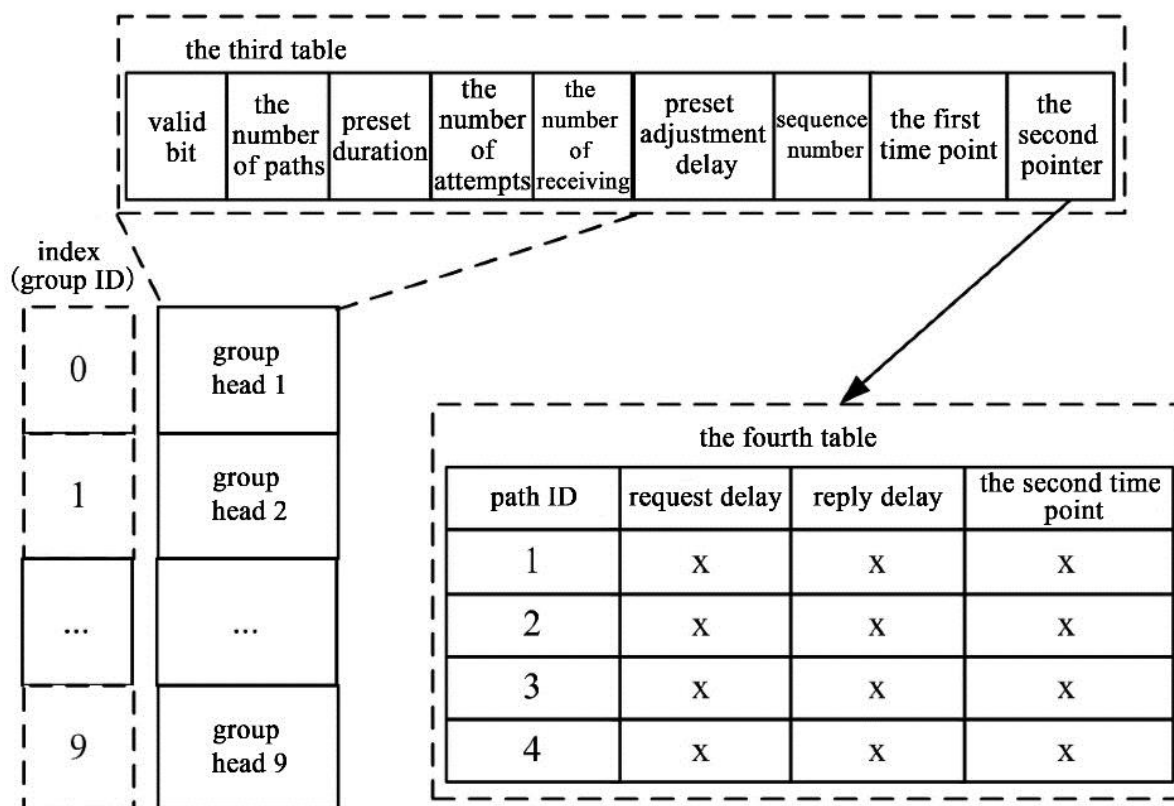


Figure 8

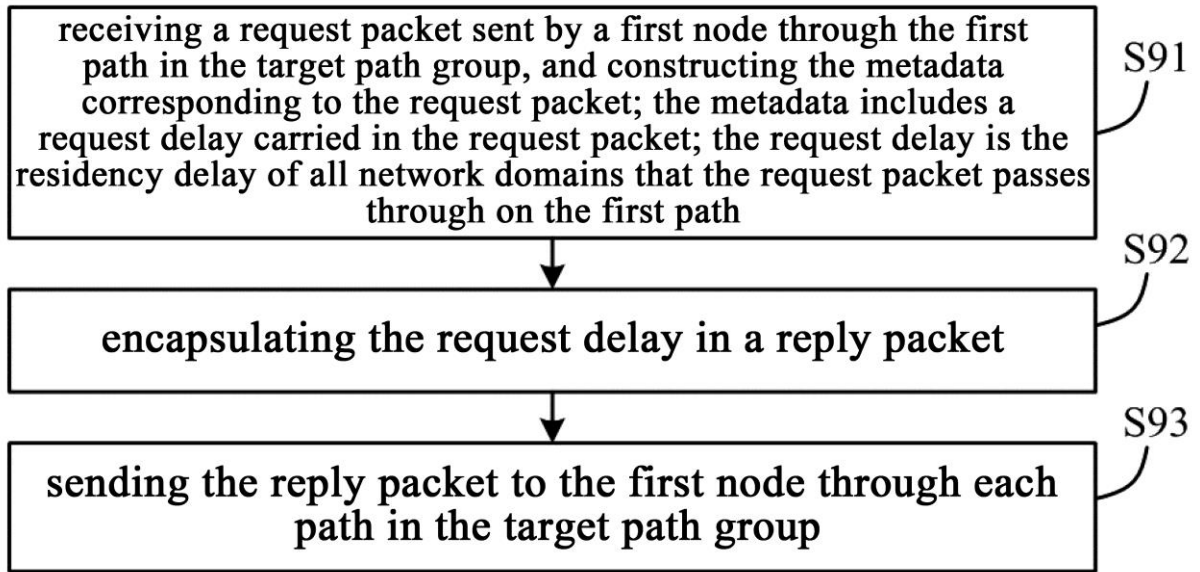


Figure 9

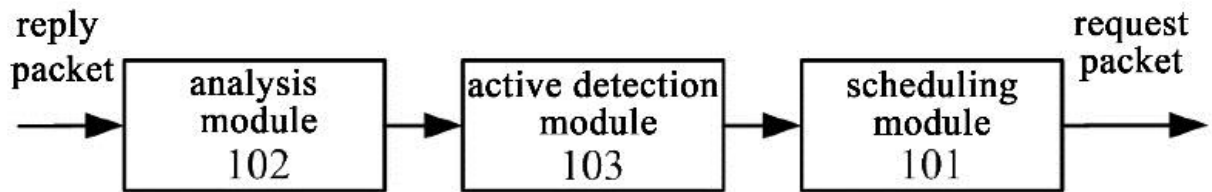


Figure 10

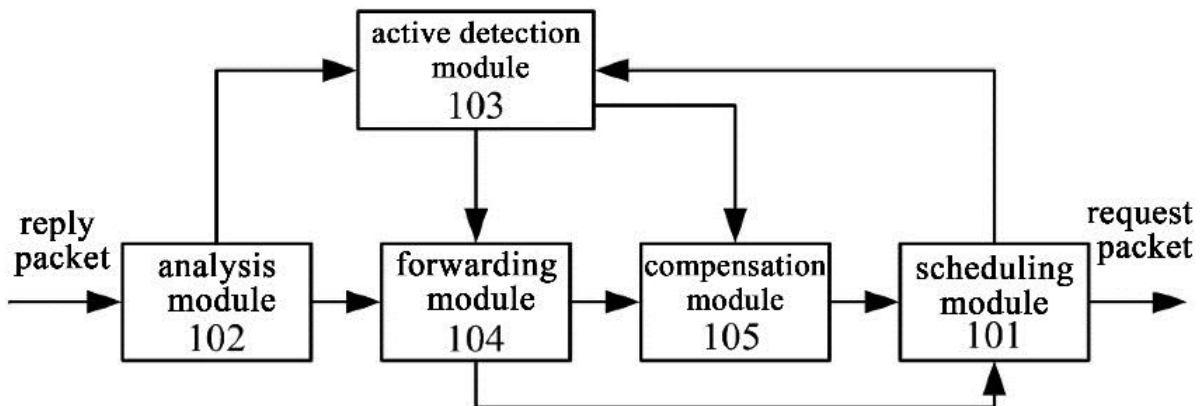


Figure 11

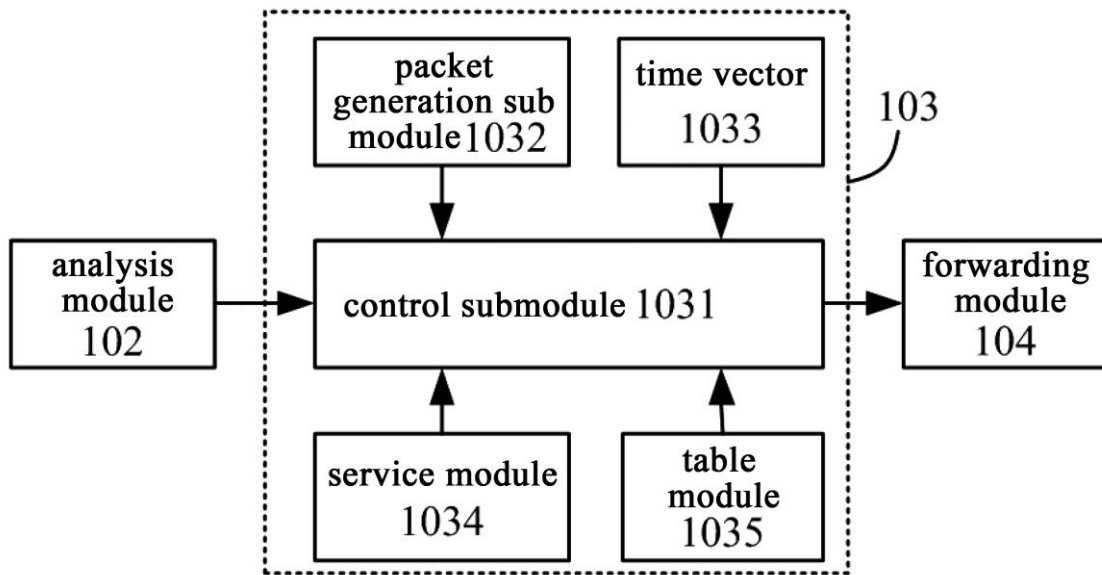


Figure 12

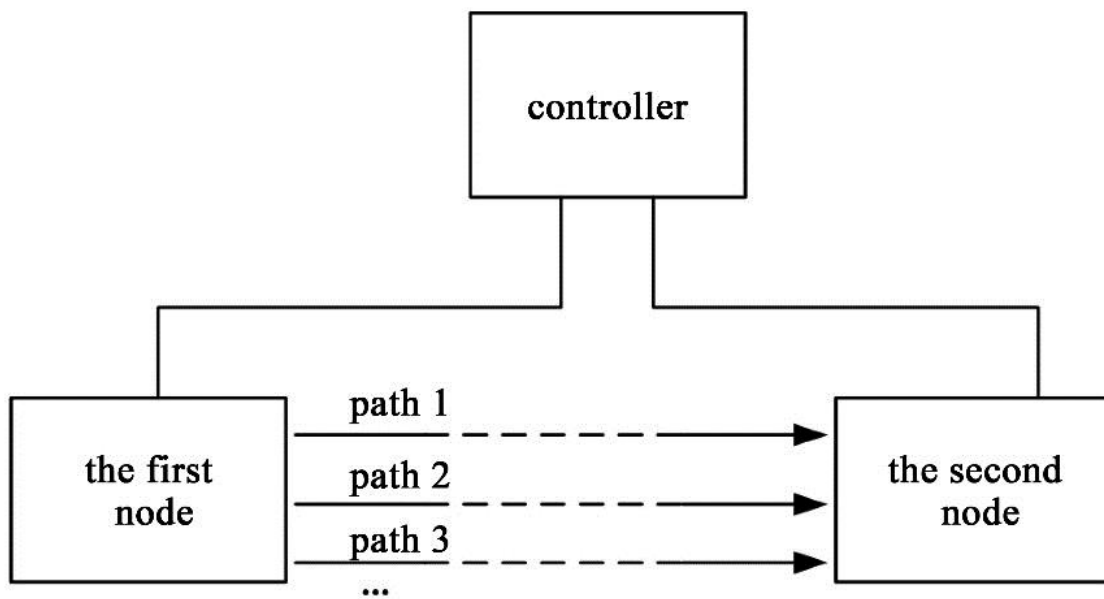


Figure 13

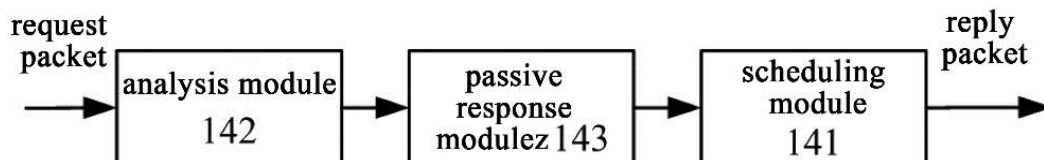


Figure 14

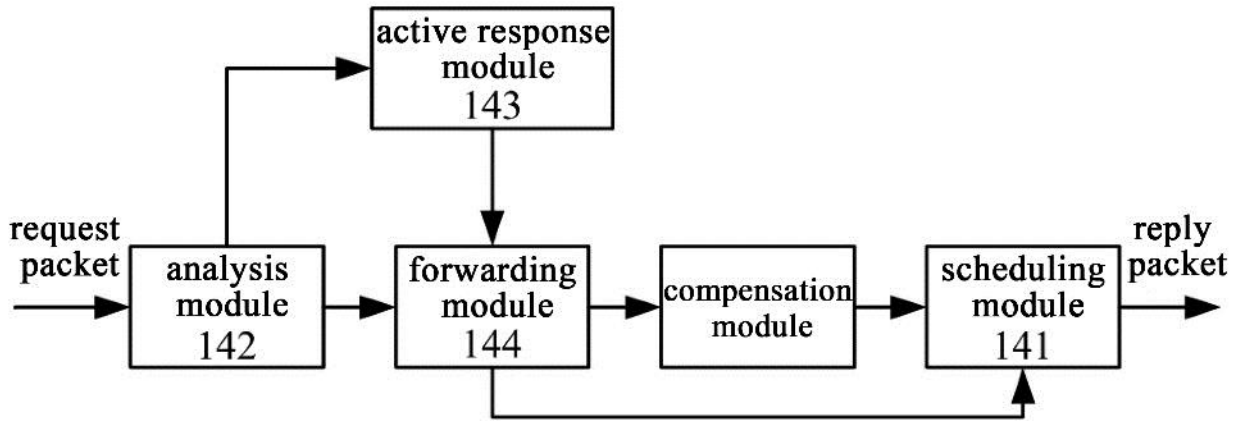


Figure 15

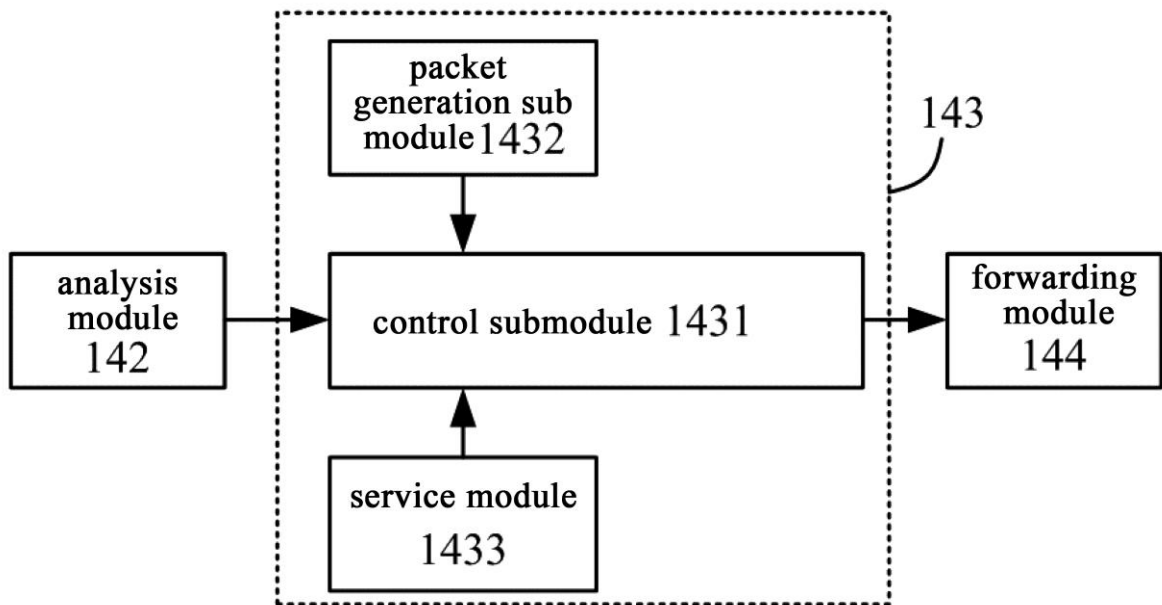


Figure 16

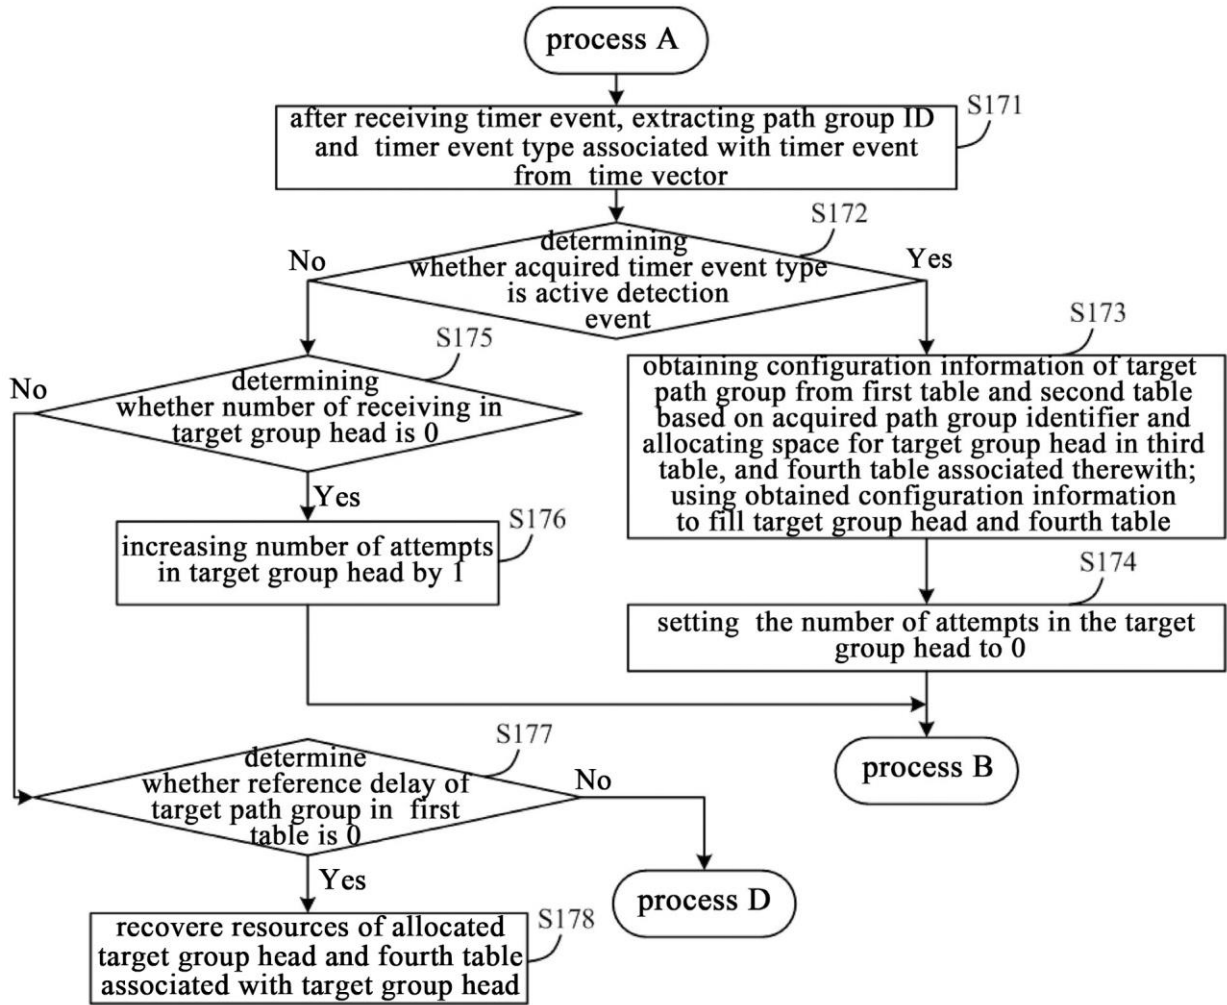


Figure 17

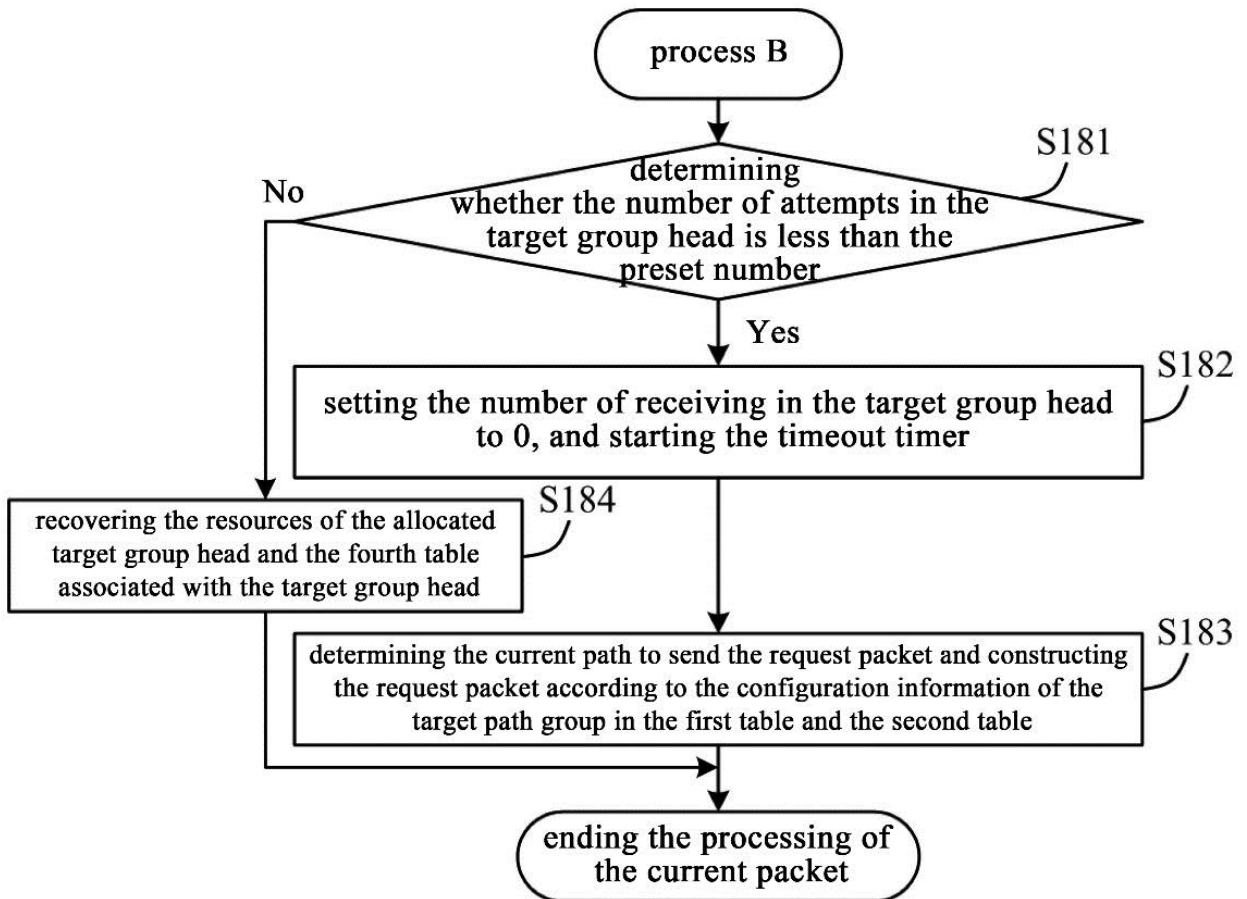


Figure 18

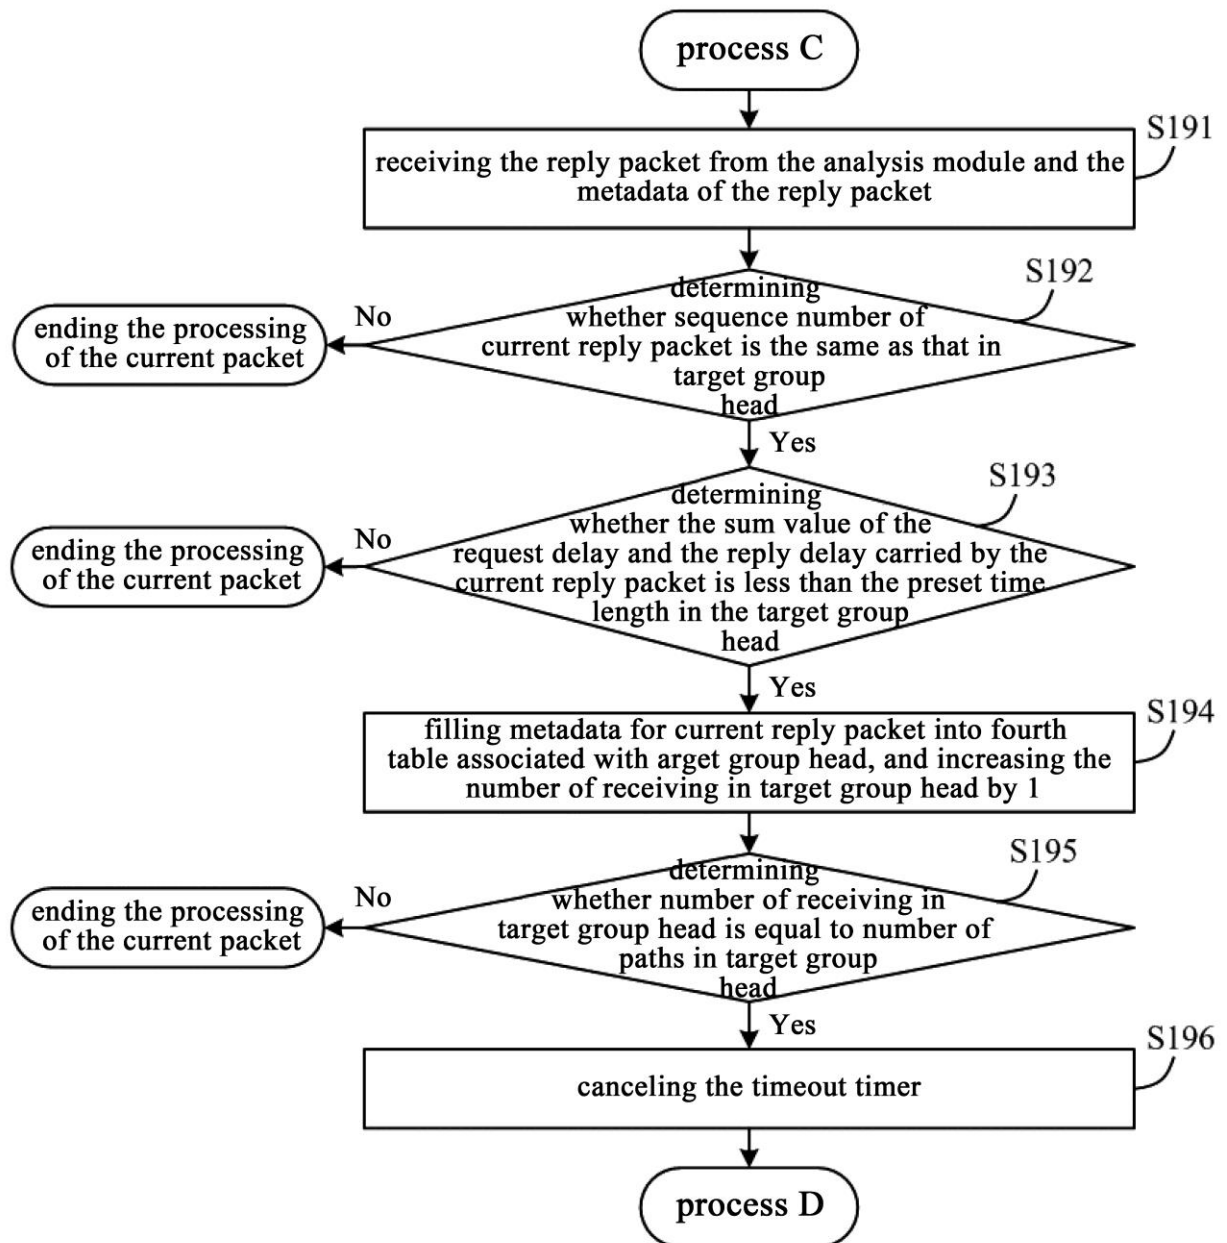


Figure 19

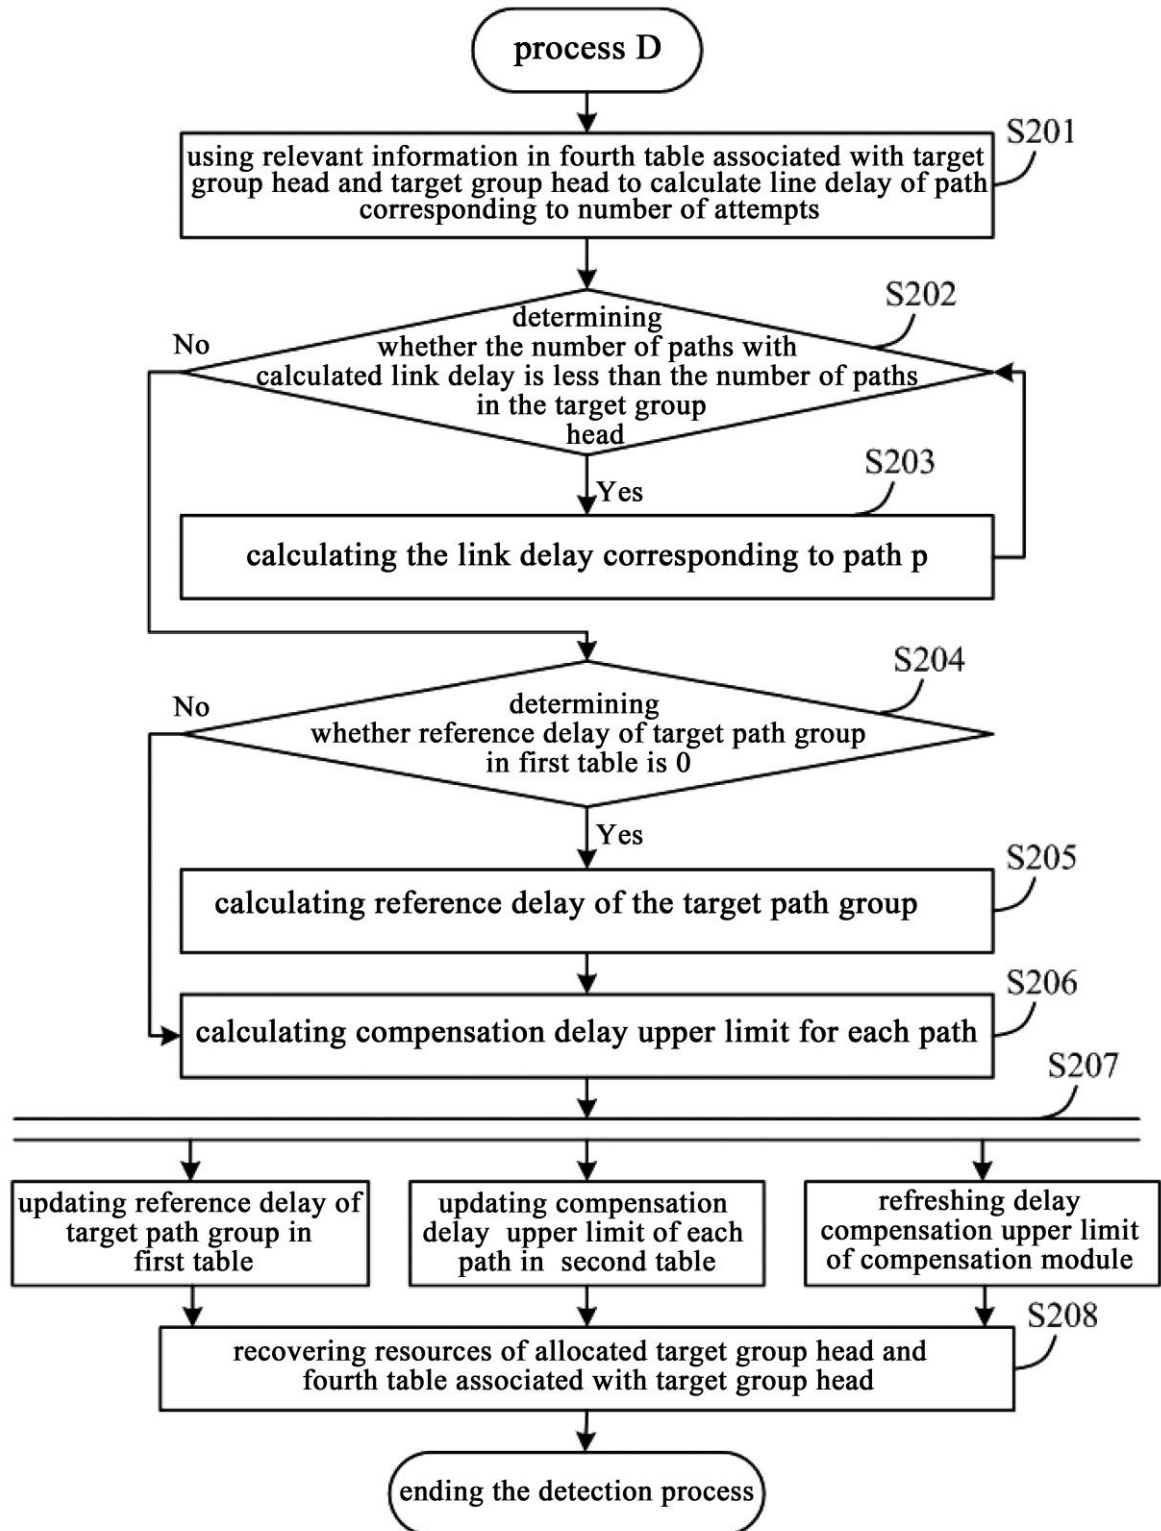


Figure 20