

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015579 A1

(51) International Patent Classification⁷: **G06F 12/14**,
1/00, 19/00, H04L 9/00

#07-13/14/15, Loyang Industrial Estate, Singapore 508769 (SG).

(21) International Application Number:
PCT/SG2003/000033

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OOI, Chin, Shyan, Raymond** [MY/SG]; Blk 438, Tampines St. 43 #08-157, Singapore 520438 (SG). **LIM, Lay, Chuan** [MY/SG]; Blk 322, Bukit Batok Street 33 #03-04, Singapore 650322 (SG). **POO, Teng, Pin** [MY/SG]; Blk 44 Bedok South Road #11-763, Singapore 460044 (SG). **TAN, Henry** [SG/SG]; 1 Palm Drive, Singapore 456458 (SG).

(22) International Filing Date: 14 February 2003 (14.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/SG02/00171 31 July 2002 (31.07.2002) SG
PCT/SG02/00227 4 October 2002 (04.10.2002) SG
10/339,696 8 January 2003 (08.01.2003) US


(74) Agent: **WATKIN, Timothy, Lawrence, Harvey**; Lloyd Wise, Tanjong Pagar, P O Box 636, Singapore 910816 (GB).

(71) Applicant (for all designated States except US): **TREK 2000 INTERNATIONAL LTD.** [SG/SG]; 30 Loyang Way

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

[Continued on next page]

(54) Title: METHOD AND APPARATUS OF STORAGE ANTI-PIRACY KEY ENCRYPTION (SAKE) DEVICE TO CONTROL DATA ACCESS FOR NETWORKS

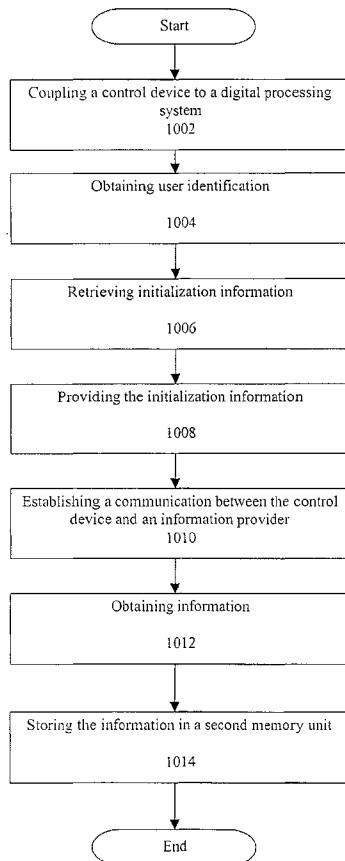

(57) Abstract: An apparatus and method of storage anti-piracy key encryption (SAKE) device controls data access for a storage/memory/network. An authentication system includes a first storage, a ROM and a microcontroller and verifies the password of a host. The first storage unit stores an authentication sequence (e.g. biometric information) and the authentication algorithm is programmed on the ROM. Upon receiving the password from the host the microcontroller loads and executes the authentication algorithm to verify the password with the hard coded authentication sequence. Access to the second storage unit/memory/network is permitted only if password is verified.

WO 2004/015579 A1



GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

(48) Date of publication of this corrected version:

22 July 2004

(15) Information about Correction:

see PCT Gazette No. 30/2004 of 22 July 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.