

This Sheet Has Been Replaced



REPLACED SHEETS SG

- ☒ Description : paged1... to paged ...18..
☒ Claim(s) : paged19... to paged ...21..
☐ Drawing(s) : paged to paged
☒ Abstract : paged22... to paged

- 1 -

PORTABLE STEAM VACUUM CLEANER

WITH SQUEEGEE

5 This invention relates to portable vacuum cleaners, and more particularly to a portable vacuum cleaner adapted to generate steam to clean flat surfaces such as windows.

Portable vacuum cleaners for cleaning solid or liquid
10 materials are well known in the art and are often referred to-as "wet/dry" vacuum cleaners. Conventional wet/dry vacuum cleaners are disclosed for example, in U.S. Patent No. 4,821,366 to Levine, U.S. Patent No. 4,924,548 to Touya et al., and U.S. Patent No. 5,005,252 to Steiner et al. These
15 devices typically include a motor driven fan enclosed within a housing for producing a vacuum to draw liquid and debris into a collection nozzle. However, conventional wet/dry vacuums are unsuited for cleaning stained fabrics, upholstery, or carpets.

20

Improvements have been made in wet/dry vacuum cleaners in an effort to increase their stain cleaning effectiveness. For example, U.S. Patent No. 4,788,738 to Mortson et al. discloses a portable vacuum cleaner having an internal
25 cleaning fluid supply system disposed in a removable discharge head which includes a chamber for retaining the



- 2 -

cleaning fluid, a spray nozzle for discharging the cleaning fluid to the surface to be cleaned, and a vacuum intake head for drawing excess fluid and debris into the vacuum. A vacuum blower unit is provided in communication with the discharge head for creating suction to draw the excess cleaning fluid from the surface and for pumping cleaning fluid from the spray nozzle. A similar vacuum cleaner is described in U.S. Patent No. 4,930,178 to Monson et al which incorporates a filter element for separating debris from the cleaning fluid which enables the cleaning fluid to be recycled for subsequent use. Often, however, it may be undesirable to apply cleaning fluids directly to fabric, upholstery, or carpets, because fading, deterioration or other damage may result.

It is desirable therefore, to provide a portable vacuum cleaner which is capable of generating steam for delivery to an area to be cleaned, which overcomes the disadvantages of the prior art by providing for both steam cleaning and normal vacuuming.

Furthermore, it is often desirable to utilize a wet dry vacuum to collect liquids such as spills or to collect liquids on flat surfaces such as floors, windows, tables, etc. A problem associated with prior art devices is the "pushing" of the liquid as the vacuum is advanced across the



- 3 -

spill, requiring an excessive amount of strokes to pick up the liquid.

A portable steam cleaning device which is adapted for cleaning windows is described in U.S. Patent No. 2,832,086 to Wells. This device includes a housing defining a steam generating chamber, a nozzle assembly for ejecting steam to a window surface to be cleaned, and a squeegee blade for wiping the window clean after steam has been applied thereto. However, this device does not provide a mechanism for removing and collecting liquid from the window after it has been wiped by the squeegee, and instead the liquid tends to collect on the window sill or floor and must be manually removed.

15

It is desirable therefore, to provide a vacuum cleaning device which is capable of generating steam for delivery to a flat surface such as a window, floor or table to be cleaned and which is capable of subsequently directing and collecting the liquid from the surface after it has been wiped clean.

The portable steam vacuum cleaner of the subject invention comprises a housing having a handle portion and a nozzle portion. A reservoir is provided in the housing for retaining water or a cleaning solution such as, for example,

25



- 4 -

soapy water, and means are associated with the reservoir for heating the liquid so as to generate steam for delivery to an area to be cleaned.

5 In one embodiment of the invention, means are provided for pumping the liquid from the reservoir to the heating means. Alternatively, another embodiment of the invention provides conduit means for communicating the reservoir with the heating means and associated valve means for selectively
10 transferring liquid from the reservoir to the heating means via the conduit means. Preferably, the heating means comprises a compact heating unit having a body portion which defines an entry port for receiving liquid from chambers in communication with the reservoir, a plurality of cascading
15 steam generating the entry port for gradually heating the liquid flowing therethrough, and a plurality of exit ports in communication with one of the steam generating chambers for ejecting pressurized steam from the heating unit to an area to be cleaned.

20

A motor driven fan assembly is disposed within the housing of the vacuum cleaner and is in communication with the nozzle portion thereof for drawing excess liquid and debris into the nozzle portion. In addition, means are associated
25 with the nozzle portion of the vacuum for containing the debris and excess liquid which is drawn into the nozzle



- 5 -

portion by the motor driven fan assembly. Preferably, structure is defined within the nozzle portion for separating liquid from the air flow drawn into the vacuum.

5 In another embodiment of the subject invention, the portable steam vacuum cleaner is particularly adapted to clean flat surfaces such as windows and includes a squeegee assembly for wiping a window after steam has been delivered thereto and directing the condensed liquid towards the nozzle
10 portion of the vacuum cleaner for collection. The squeegee assembly is preferably removably mounted to the housing of the vacuum cleaner adjacent the nozzle portion thereof and includes a replaceable squeegee blade. In operation, steam is generated within the housing, and is delivered to the
15 surface to be cleaned, such as a window. The window is then wiped with the squeegee blade, and the excess liquid is drawn into the nozzle portion of the housing where it is subsequently contained. The device may also be utilized to contain and direct large spills to the vacuum port by
20 guiding the liquid with the squeegee blade as the vacuum collects the liquid.

Further features of the invention, its nature, and various advantages will become more apparent to one skilled in the
25 art to which the subject invention appertains from the following detailed description of the invention taken in



conjunction with the accompanying drawings.

Preferred embodiments of the subject invention will be described hereinbelow with reference to the drawings
5 wherein:

Fig. 1 is a perspective view of a portable steam vacuum cleaner in accordance with a preferred embodiment of the subject invention;

10

Fig. 2 is a side cross-sectional view taken along line 2-2 of Fig. 1;

Fig. 3 is a bottom plan view of the portable steam vacuum
15 cleaner of Fig. 1;

Fig. 4 is a top plan view of the portable steam vacuum cleaner of Fig. 1;

20 Fig. 5 is a perspective view of the heating unit for generating steam within the portable vacuum cleaner of Fig. 1;

Fig. 6 is a bottom plan view of the heating unit of Fig. 5;

25

Fig. 7 is a top plan view of the heating unit of Fig. 5;



- 7 -

Fig. 8 is a side elevational view of the heating unit of Fig. 5;

Fig. 9 is a front elevational view of the heating unit of
5 Fig. 5;

Fig. 10 is a perspective view of another embodiment of the portable steam vacuum cleaner in accordance with the subject invention;
10

Fig. 11 is a side cross-sectional view taken along line 11-11 of Fig. 10;

Fig. 12 is a perspective view of yet another embodiment of
15 the portable steam vacuum cleaner in accordance with the subject invention;

Fig. 13 is a side cross-sectional view taken along line 13-13 of Fig. 12;
20

Fig. 14 is a cross-sectional view of an alternate embodiment of the portable steam vacuum cleaner of Fig. 13;

Fig. 15 is an exploded perspective view of a squeegee
25 assembly in accordance with a preferred embodiment of the subject invention;



- 8 -

Fig. 16 is a perspective view in partial cross-section of the vacuum cleaning apparatus of Fig. 1 in conjunction with the squeegee assembly of Fig. 15;

5 Fig. 17 is a side elevational view of the vacuum cleaning apparatus of Fig. 12 in conjunction with the squeegee assembly of Fig. 15; and

Fig. 18 is a perspective view of the vacuum cleaning
10 apparatus of Fig. 17 during a cleaning operation.

Referring now in detail to the drawings in which like reference numerals identify similar or identical elements, a preferred embodiment of the portable steam vacuum cleaner
15 of the subject invention is illustrated in Fig. 1, and is designated generally by reference numeral 10. Vacuum cleaner 10 basically comprises a housing 12 which includes a handle portion 14 defining a handle grip 16, and a nozzle portion 18 preferably detachably mounted adjacent housing
20 12. Nozzle portion 18 may be released from housing 12 by movement of a clamp member 20 which may be manipulated by a user for gaining access to the interior of the vacuum cleaner 10.

25 Referring to Fig. 2, a motor 22 is enclosed within housing 12 for driving a fan 24 mounted for rotation relative to

- 9 -

motor 22. Rotation of fan 24 creates suction for drawing debris and liquids into the nozzle portion 18 of vacuum cleaner 10. A sealing member 26 is disposed between fan 24 and motor 22 for preventing liquid from contacting the motor
5 22 during wet vacuuming. In addition, a liquid separator 28 is defined in nozzle portion 18 which includes structure for preventing liquid drawn into nozzle portion 18 during wet vacuuming from entering, the cavity 30 in which the motor 22 and fan 24 are located, while prohibiting debris from
10 contacting fan 24 during dry vacuuming. In particular, water drawn into an uptake port 32 of nozzle portion 18 will be directed towards a diverting wail 34 of arcuate configuration which diverts the liquid into a containing area 36 formed in nozzle portion 18, while permitting air to
15 be directed into a filter chamber 38 in which a filter element 40 is disposed for removing debris from the air flow. Air, drawn through filter element 40, is subsequently exhausted through a plurality of vents 42 which are formed in the lateral walls of housing 12 (see Fig. 1).

20

A reservoir chamber 44 is formed in the nozzle portion 18 of vacuum cleaner 10 for retaining water or a cleaning solution. Reservoir chamber 44 may be filled with the liquid in a conventional manner such as through an aperture 46
25 provided in clamp structure 20. A conduit 48 extends through a valve 52 from reservoir chamber 44 to a heating unit 50



- 10 -

which is provided for generating steam for delivery to an area to be cleaned. Conduit 48 permits gravitational flow of liquid from the reservoir 44 to the heating unit 50. Control valve 52 is associated with conduit 48 for
5 selectively controlling the flow of liquid from the reservoir 44 to the heating unit 50.

Turning to Figs. 5-9, the heating unit 50 comprises a body portion 52 of substantially rectangular configuration having
10 a cover panel 54 mountable to body portion 52 at a plurality of standoff locations 56 disposed in spaced relation about the periphery of body portion 52. Preferably, heating unit 50 is constructed of cast aluminum or a like material. An entrance port 58 extends through a side wall 60 of body
15 portion 52 through which liquid from reservoir chamber 44 flows via conduit 48. Entrance port 58 communicates with a plurality of cascading steam generating chambers defined in body portion 52 including a primary steam generating chamber 62 of a generally inverted shaped configuration. Opposed
20 lateral dams 64 and 66 are formed at the head of primary steam generating chamber 62 for limiting the flow of heated liquid from the primary steam generating chamber 62 to a pair of secondary lateral steam generating chambers 68 and 70 of generally J-shaped configuration. Secondary dams 72
25 and 74 are formed at the trailing ends of lateral steam generating-chambers 68 and 70 respectively, for limiting the



- 11 -

flow of liquid into a tertiary steam generating chamber 76. A tertiary dam 78 separates the tertiary steam generating chamber 76 from a steam ejection chamber 80 which has a plurality of exit ports 82 defined therein through which
5 steam generated by heating unit 50 is delivered to an area to be cleaned. A heating element such as cal-rod heating tube 84 is provided and is preferably cast integral with body portion 52 for transferring heat to the cascading steam generating chambers. Cal-rod heating tube 84 includes
10 terminals 86 and 88 which are in electrical connection with a power supply source of alternating current from power cord 90.

A bimetallic thermostat 92 is mountable within an annular
15 cavity 94 provided in the bottom surface 96 of the body portion 52 of the heating unit 50 by a pair of opposed mounting flanges 98 and 100 (see Fig. 6). The thermostat automatically controls the operation of heating unit 50. Referring to Fig. 2, a scrubbing brush 102 is detachably
20 mounted to the housing 12 of vacuum cleaner 10 adjacent exit ports 82 of heating unit 50 for assisting cleaning operations.

In operation, the portable steam vacuum cleaner 10 of the
25 subject invention may be prepared for use by connecting the unit to an electrical outlet through power cord 90. After



- 12 -

approximately one minute, the cal-rod heating tube 84 will have transferred sufficient heat to the body portion 52 of heating unit 50 so as to generate steam once liquid is introduced. Thus, at a desired time, the user may depress
5 control valve 52 to cause cleaning solution or water to gravitate from the reservoir 44 into the primary steam generating chamber 62 of heating unit 50 via conduit 48. Upon entering the primary steam generating chamber 62, the liquid will begin to increase in temperature and pressure
10 whereby heated liquid will transfer into the secondary lateral steam generating chambers 68 and 70 by traversing lateral dams 64 and 66. The temperature and pressure of the liquid is further increased in steam generating chambers 68 and 70 until such time as it flows into the tertiary steam
15 generating chamber 76 by passing over secondary dams 72 and 74. Once introduced into the tertiary chamber 76 of heating unit 50, the temperature of the liquid is sufficiently increased to generate steam which traverses tertiary dam 78 and enters into the ejection chamber 80 where it is ejected
20 under pressure through the ejection ports 82 to the area to be cleaned. As steam is ejected from the heating unit 50, the user may manipulate the device to employ scrub brush 102 which will assist in the cleaning task.

25 Once the stain has been removed and the area cleaned, the user may depress a toggle switch 104 located adjacent handle



- 13 -

16 which activates the motor driven fan 24, thereby creating a vacuum for drawing debris and the excess liquid created by the condensed steam into the uptake port 32 of nozzle portion 18. Liquid drawn into uptake portion 32 is
5 advantageously directed toward the diverting wall 34 of separator structure 28 and into the liquid containing area 36, while air flow is directed through filter chamber 38, against filter element 40, and subsequently through the exhaust vents 42 formed in the wall of housing 12.

10

Turning to Figs. 10 and 11, another embodiment of the portable steam vacuum cleaner in accordance with the subject invention is illustrated and designated generally by reference numeral 200. Vacuum cleaner 200 comprises a
15 housing 212 having a handle portion 214 defining a handle grip 216, and a nozzle portion 218. A motor 222 and fan 224 are enclosed within housing 212 for creating a vacuum to draw debris and liquid into the nozzle portion 218 through an uptake port 232. A reservoir 244 is defined in the handle
20 portion 214 of vacuum cleaner 200 which may be filled with water or cleaning solution through an aperture 215 extending through the wall thereof.

A pump 260 is provided in vacuum cleaner 200 operable by a
25 toggle switch 262 for pumping liquid from reservoir 244 to a heating unit 250. A delivery tube 264 extends from the



- 14 -

reservoir 244 to pump 260, and an outlet tube 266 extends from pump 260 through housing 212 to an entrance port 258. A relief valve 268 may be provided for returning liquid to reservoir 244 from heating unit 250 via a tubular conduit
5 270 in the event of over pressurisation. Valve 268 is provided in the cover panel 254 of heating unit 250. An external relief valve 272 is associated with tubular conduit 270 for releasing pressure outside the vacuum 200.

10 In operation, vacuum cleaner 200 is prepared for use by heating the unit 250 for a sufficient period of time, and thereupon depressing the toggle switch 262 so that pump 260 delivers liquid to heating unit 250 where it is sufficiently heated to generate pressurized steam for delivery to an area
15 to be cleaned. Thereafter, the motor driven fan 224 is activated by depressing switch 290 to draw excess liquid and debris into the nozzle portion 218 of vacuum cleaner 200.

Referring to Figs. 12 and 13, yet another embodiment of the
20 portable steam vacuum cleaner of the subject invention is illustrated and is designated generally by reference numeral 300. Vacuum cleaner 300 is substantially similar to vacuum cleaner 200 in that it comprises a pump 360 operable by a toggle switch 364 for transferring liquid from a reservoir
25 344 defined in a handle portion 314 to a heating unit 350 via a tubular conduit 370 extending through the housing




- 15 -

portion 312 thereof. Vacuum cleaner 300 differs however, in that the heating unit 350 is enclosed within a chamber 380 which is pivotably mounted with respect to the housing 312 thereof by a pivot pin 382. By mounting the heating unit 350
5 in this manner, the range of operability of vacuum cleaner 300 is substantially increased.

Referring to Fig. 14, an alternate embodiment of vacuum cleaner 300 is illustrated wherein the reservoir 344 is
10 positioned adjacent heating unit 350 enclosed within chamber 380 and adapted to be filled through an aperture 345 associated therewith. Arranged in this manner, a pump is not required for transferring the liquid from the reservoir to the heating unit. Instead, a conduit 348 extends from the
15 reservoir 344 to heating unit 350 and includes a manually operated control valve 352 for selectively controlling the flow of liquid to heating unit 350.

In use, cleaning solution or water is delivered from
20 reservoir 344 to the heating unit 350 by depressing the control valve 352 to allow liquid to gravitate into heating unit 350 where it is generated into pressurised steam for delivery to an area to be cleaned.

25 Turning now to Fig. 15, there is illustrated a squeegee assembly designated generally by reference numeral 400 and



- 16 -

configured to be mounted adjacent the nozzle portion of vacuum cleaner 10 which is described hereinabove and illustrated in Figs. 1-4.

5 More particularly, as best seen in Fig. 16, squeegee assembly 400 is adapted to detachably mount within uptake port 32 of the nozzle portion 18 of vacuum cleaner 10. Squeegee assembly 400 comprises a pair of mounting brackets 402 and 404 each having an outwardly extending rear flange 406 and 408, respectively, and a respective forward engaging
10 fork 410 and 412. The rear flanges 406 and 408 are configured to engage the side walls of uptake port 32 at the trailing end thereof. A bridge member 414 rigidly connects the forward portions of brackets 402 and 404 and permits the
15 relative inward flexure of the rear portion thereof to facilitate the unobstructed insertion of the brackets 402 and 404 into uptake port 32 for mounting the squeegee assembly 400.

20 Squeegee assembly 400 further comprises a blade retention member 416 dimensional and configured to be received within the forward engaging forks 410 and 412 of mounting brackets 402 and 404. Retention member 416 includes an elongated engagement slot 418 for releasably retaining a replaceable
25 squeegee blade 420. The squeegee blade 420 is preferably formed from a strip of material, such as, for example,



- 17 -

rubber or a similar flexible material.

Referring to Figs. 17 and 18, an alternative embodiment of the squeegee assembly of the subject invention is
5 illustrated in conjunction with vacuum cleaner 300 which is described hereinabove and illustrated in Figs. 12-14. In this embodiment of the window cleaning apparatus, the blade retention member 416 is mounted adjacent the scrubbing brush provided on chamber 380. Member 416 may be detachably
10 mounted to vacuum cleaner 300, or alternatively, may be integrally constructed with vacuum cleaner 300. In operation, steam generated by the heating unit 350 disposed within chamber 380 is delivered to a surface to be cleaned such as window 425 as described in detail hereinabove with
15 respect to vacuum cleaner 300. Shortly thereafter, utilizing squeegee blade 420, the operator wipes the steamed window 425 in a continuous downward stroke. As liquid is wiped from the window 425 by squeegee blade 420, it is drawn into the uptake port 332 of nozzle portion 318 and transferred into
20 the liquid containing area formed therein.

To the extent not already indicated, it also will be understood by those of ordinary skill in the art to which the subject invention appertains that any one of the various
25 specific embodiments herein described and illustrated may be further modified to incorporate features shown in other of



- 18 -

the specific embodiments. For example, the vacuum cleaner may be utilized to steam clean large surfaces by directing the deposited liquid towards the vacuum uptake port, or to vacuum large spills by gathering the spill with the squeegee
5 blade while collecting the spill with the vacuum.

Although the subject invention has been shown and described with respect to a preferred embodiment, it will be understood by those skilled in the art that various
10 modifications and changes may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.



- 19 -

CLAIMS

1. An apparatus for cleaning flat surfaces comprising:
 - a) a housing having a handle portion and a nozzle portion;
 - 5 b) a squeegee assembly mounted to said housing adjacent said nozzle portion for wiping a flat surface; and
 - c) collection means for drawing liquid from the surface into said nozzle portion.
- 10 2. An apparatus as claimed in claim 1 further comprising a reservoir defined in said housing for retaining clean liquid for delivery to the flat surface.
3. An apparatus as claimed in claim 2 further comprising
15 means for heating the clean liquid so as to generate steam for delivery to the flat surface.
4. An apparatus as claimed in claim 3 further comprising
20 means for transferring the clean liquid from said reservoir to said heating means.
5. An apparatus as claimed in and preceding claim wherein said collection means comprises a motor driven fan assembly disposed in said housing and communicating with said nozzle
25 portion.





- 20 -

6. An apparatus as claimed in claim 5 wherein said collection means further comprises means for containing the liquid drawn from the flat surface.

5 7. An apparatus as claimed in any preceding claim wherein said squeegee assembly is removably mounted adjacent said nozzle portion.

8. An apparatus as claimed in claim 7 wherein said
10 squeegee assembly includes a replaceable squeegee blade formed of a flexible material.

9. An apparatus for cleaning flat surfaces as claimed in any of claims 2-8 further comprising means for delivering
15 the clean liquid to the flat surface to be cleaned.

10. An apparatus as claimed in any of claims 3-9 further comprising valve means for selectively transferring the clean liquid from said reservoir to said heating means.

20

11. An apparatus as claimed in claim 8 wherein said squeegee assembly is detachably mounted adjacent said nozzle portion and the replaceable squeegee blade is formed from a strip of rubber.

25

12. An apparatus as claimed in any of claims 3-11 wherein



said heating means comprises an enclosure defining an entry
port for receiving clean liquid from said reservoir, a
plurality of cascading steam generating chambers in
communication with said entry port, and at least one exit
5 port in communication with at least one of said steam
generating chambers of releasing steam from said enclosure.

13. An apparatus as claimed in claim 12 wherein said
heating means further comprises a heating coil in
10 association with said enclosure for transferring heat to
said plurality of steam generating chambers, whereby the
operation of said heating coil is controlled by a
thermostat.

This Sheet Has Been Replaced



* C L M S *


ABSTRACT OF THE DISCLOSURE

PORTABLE STEAM VACUUM CLEANER WITH SQUEEGEE

A vacuum cleaning apparatus is provided which includes a
5 housing having a handle portion and a nozzle portion. A
reservoir is defined in the housing for retaining cleaning
solution or water, and a heating unit is associated with the
reservoir for heating the liquid so as to generate steam for
delivery to a flat surface such as a window to be cleaned.
10 A squeegee assembly is mounted to the housing adjacent the
nozzle portion for wiping the window after liquid has been
deposited thereon. A motor driven fan assembly is disposed
within the housing in communication with the nozzle portion
for drawing excess liquid and debris into the nozzle
15 portion. The nozzle portion defines structure for separating
and containing the liquid which is drawn into the apparatus.

This Sheet Has Been Replaced





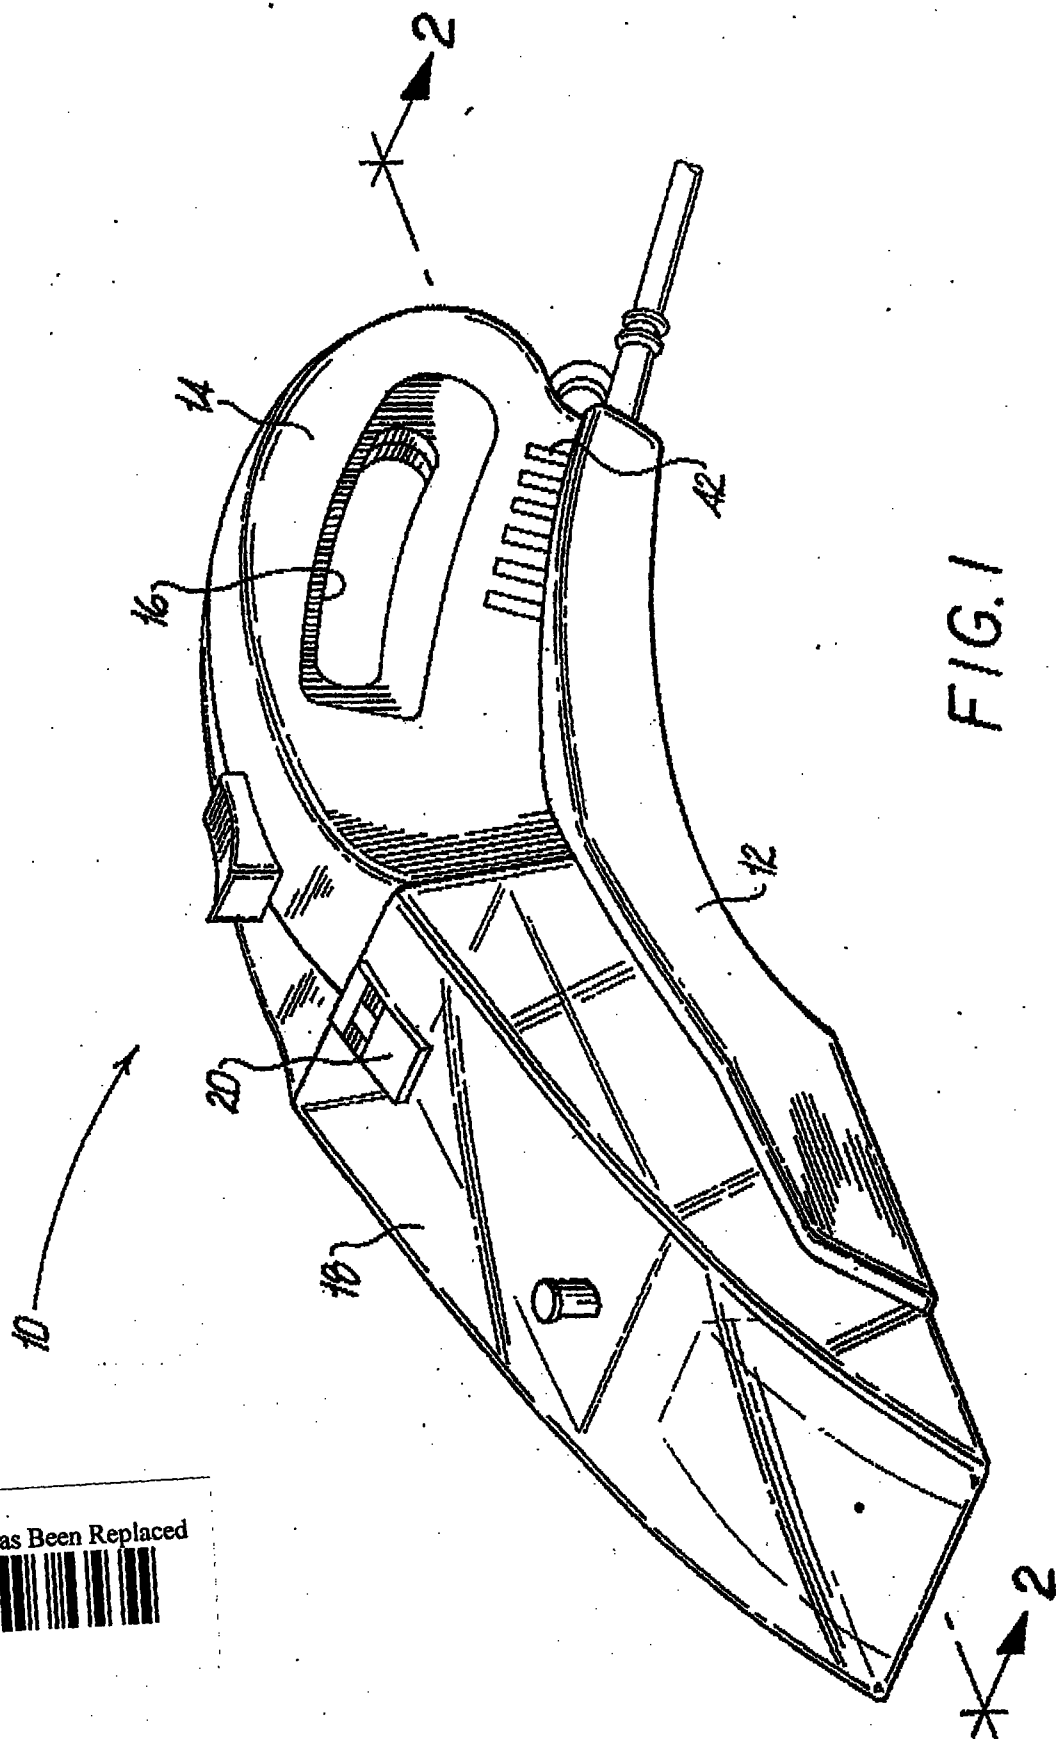



This Sheet Has Been Replaced



FIG. 2

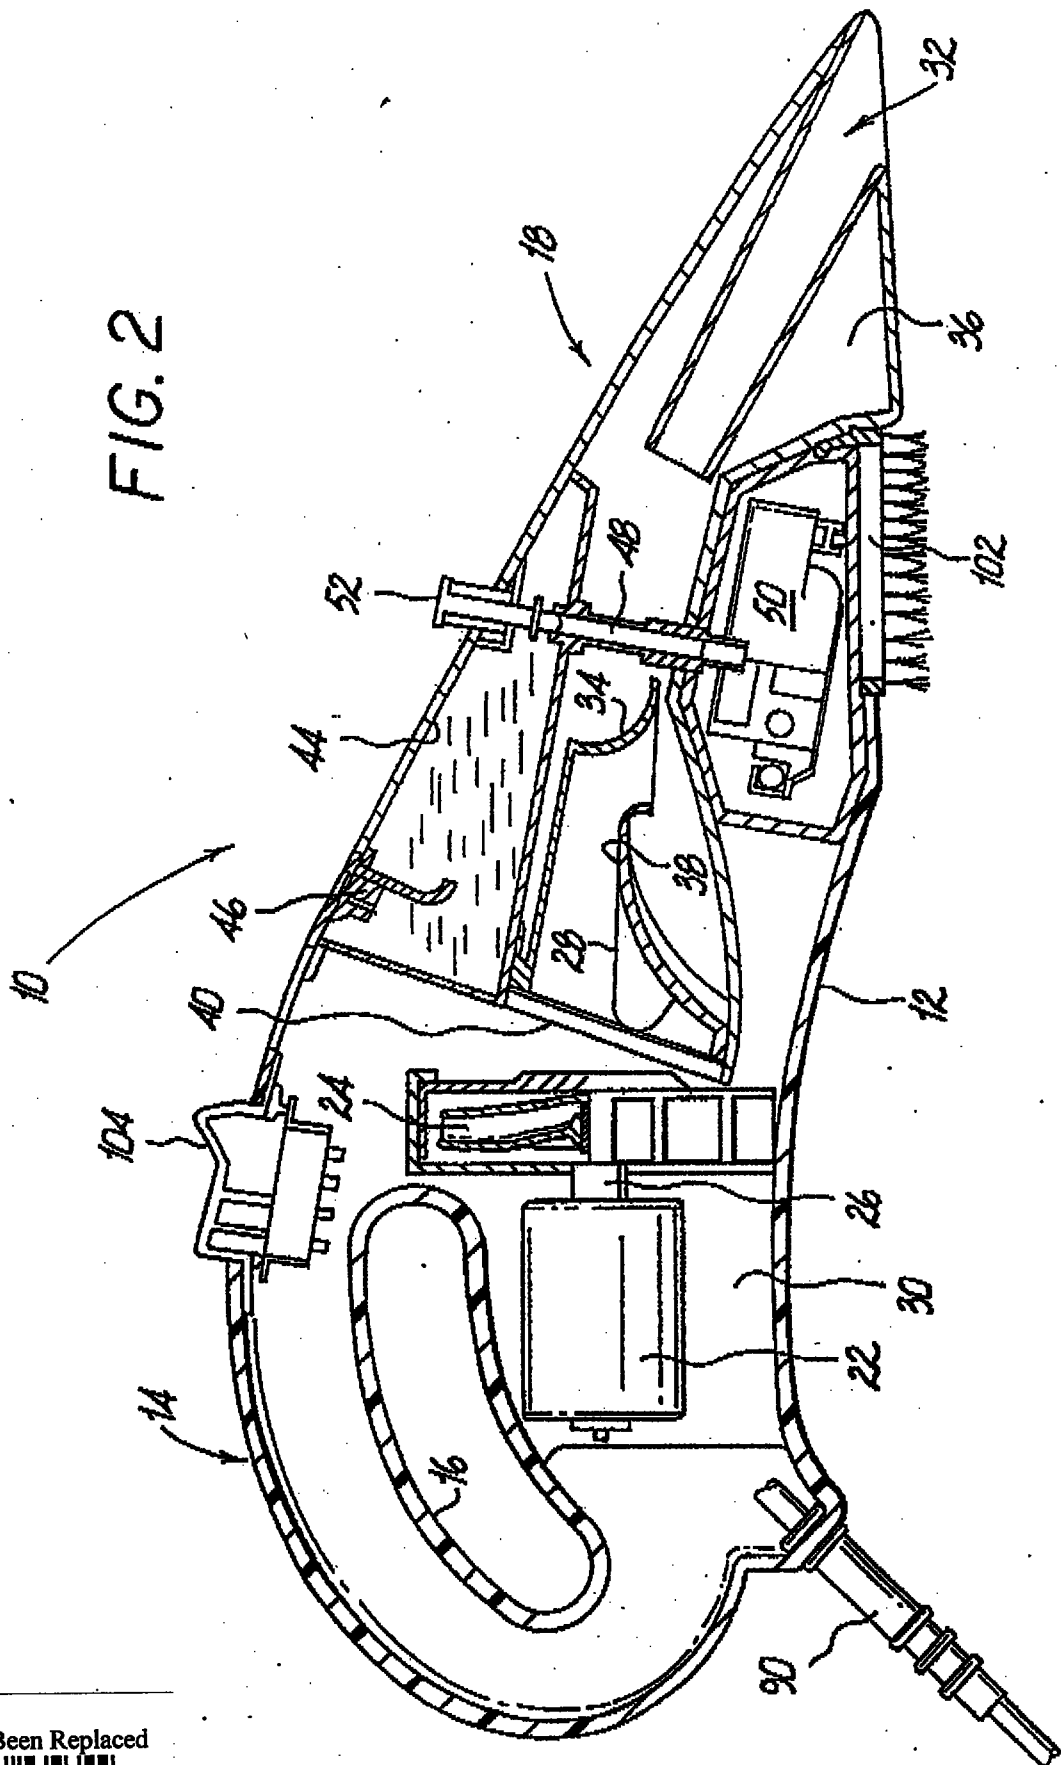

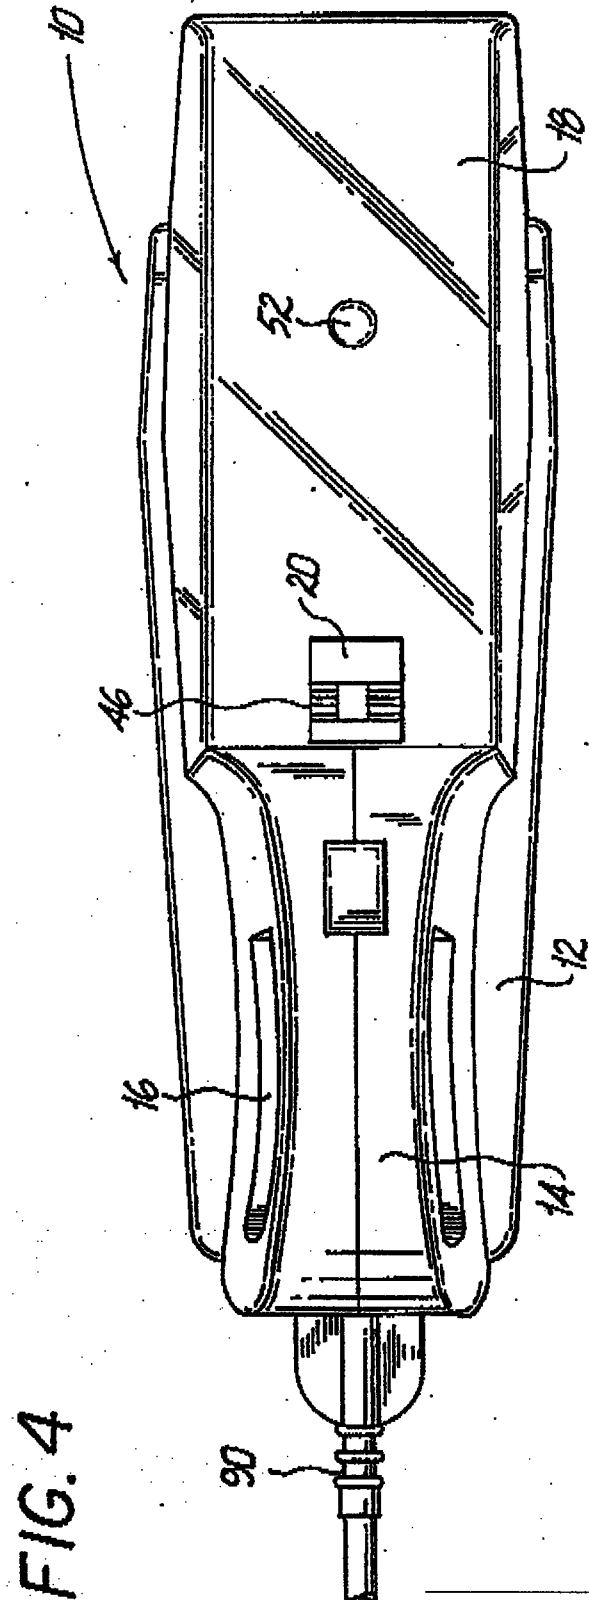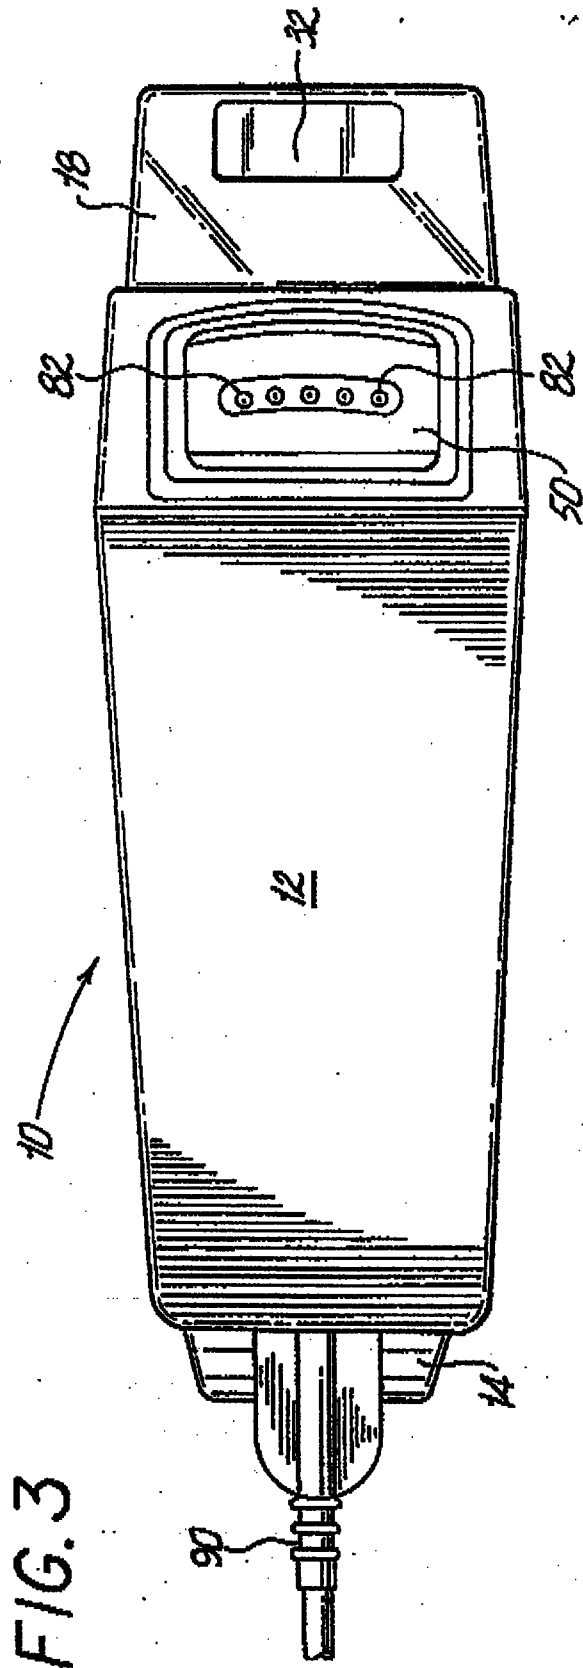

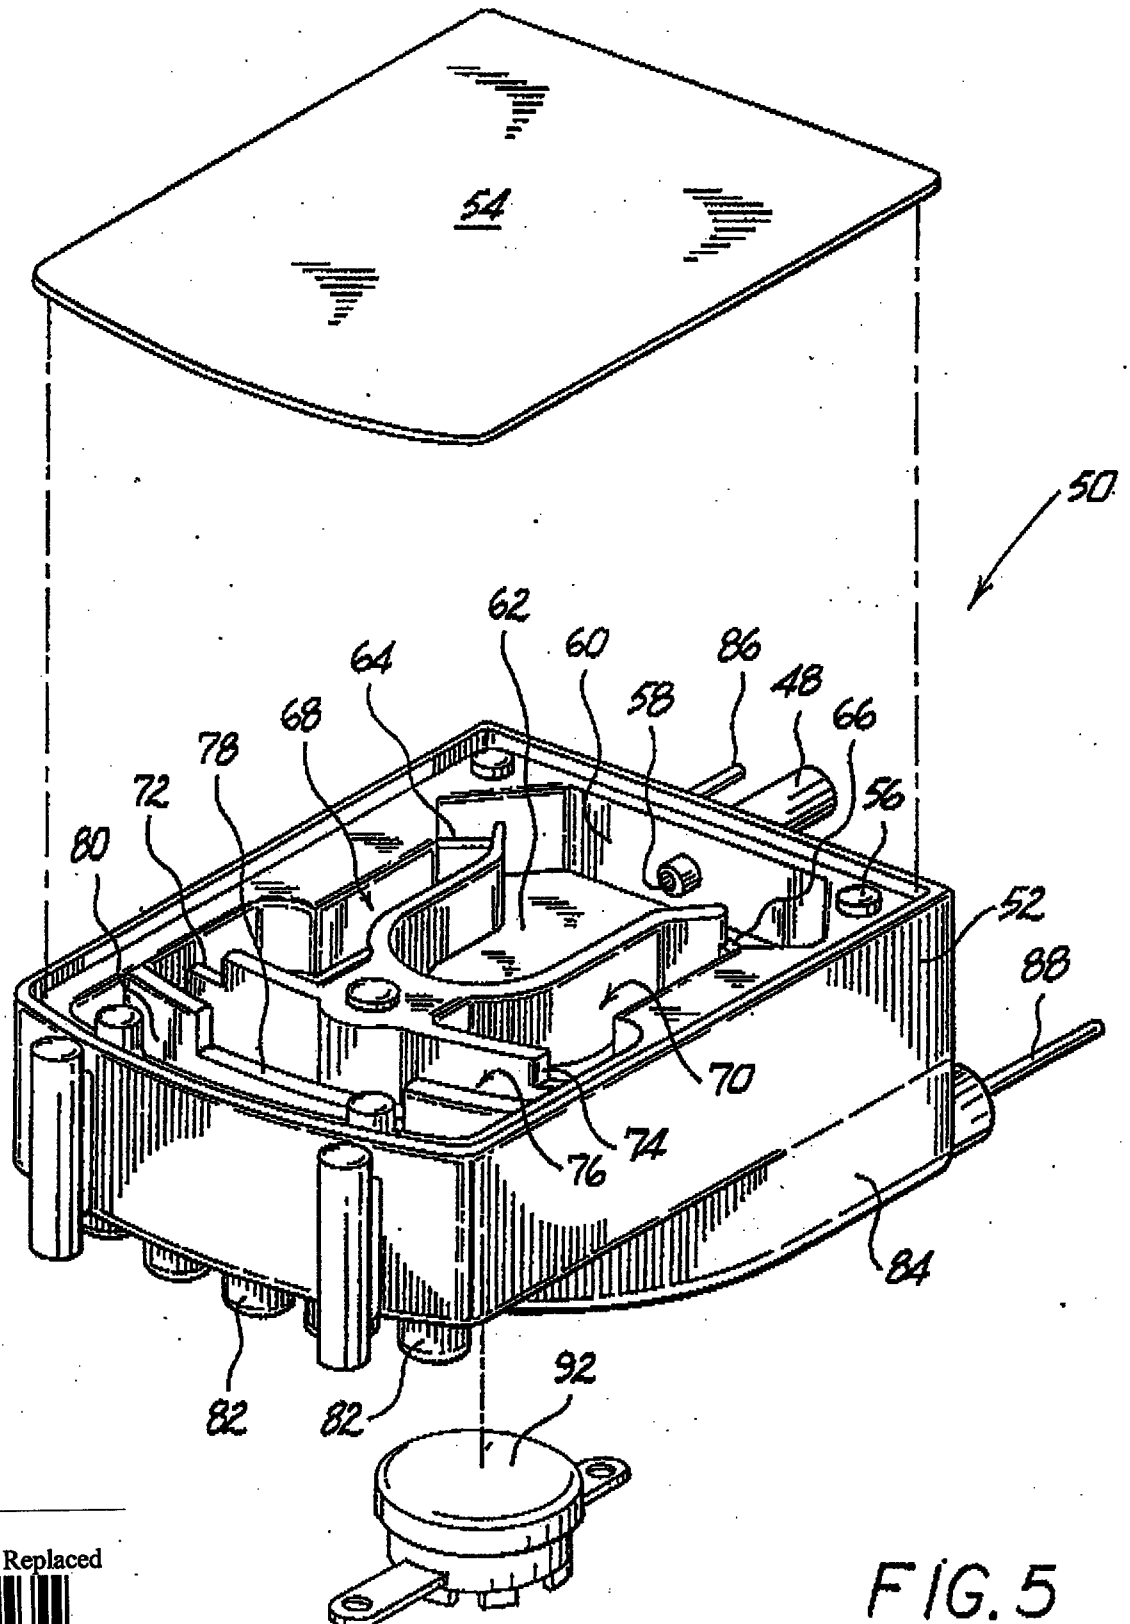

This Sheet Has Been Replaced



FIG. 5

FIG. 7


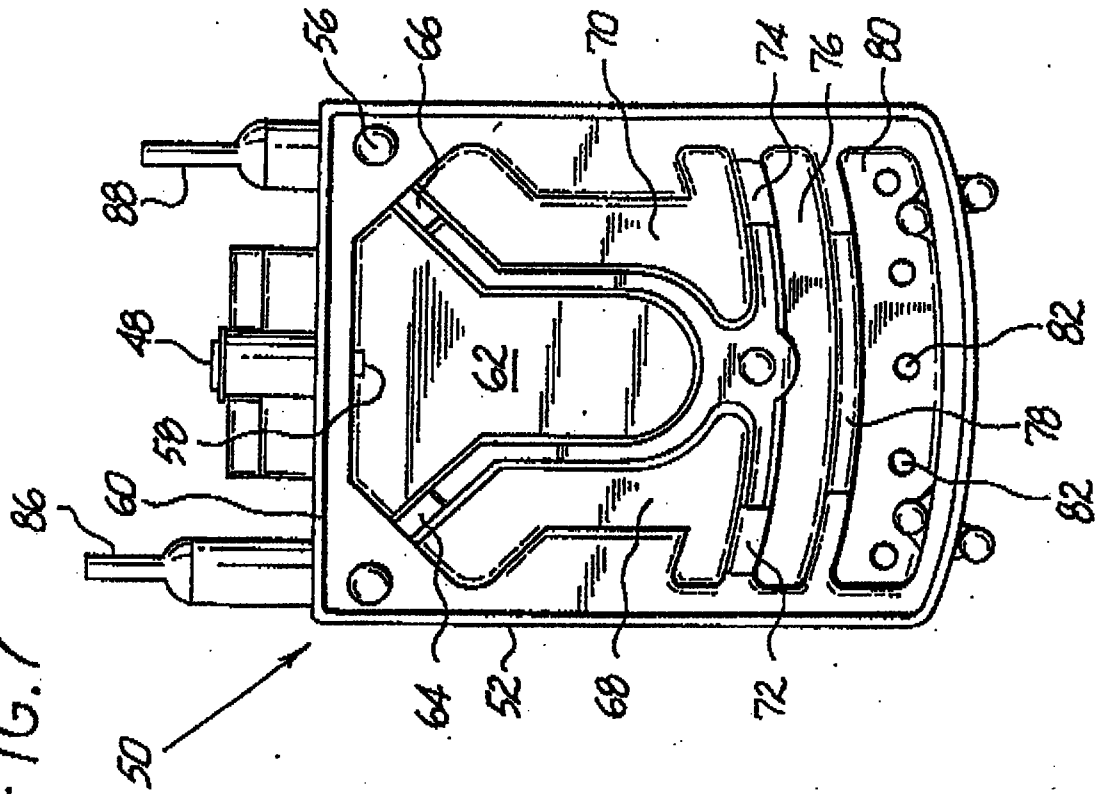


FIG. 6

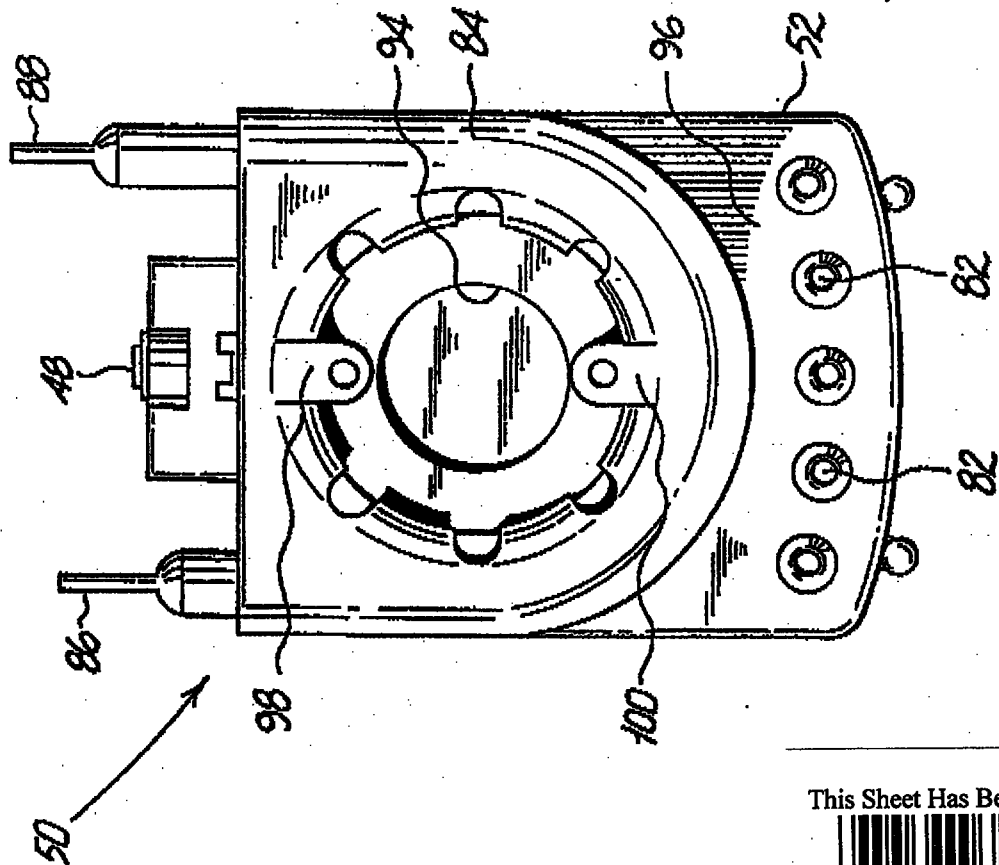

This Sheet Has Been Replaced



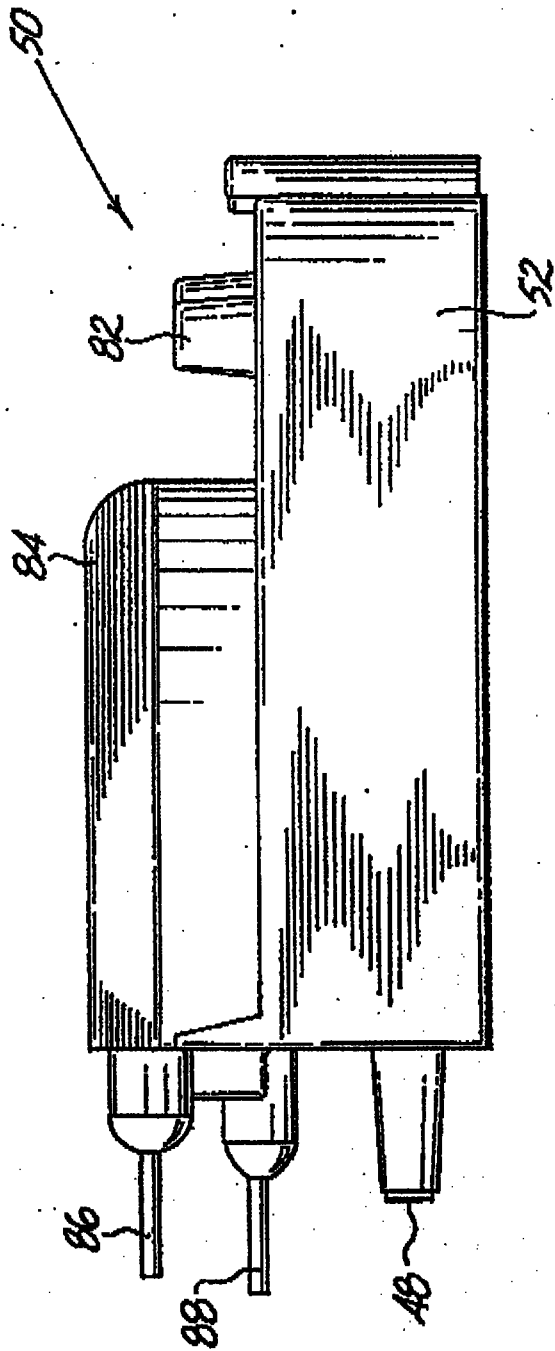


FIG. 8

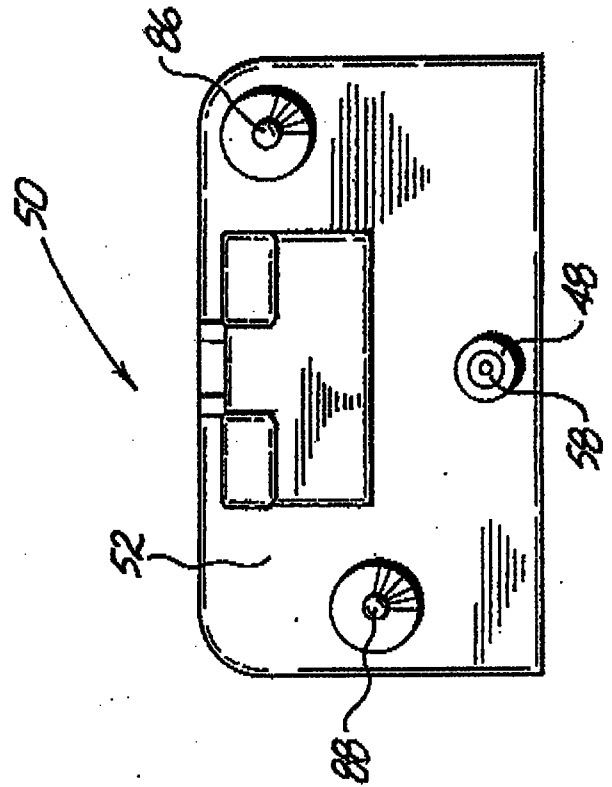


FIG. 9

This Sheet Has Been Replaced



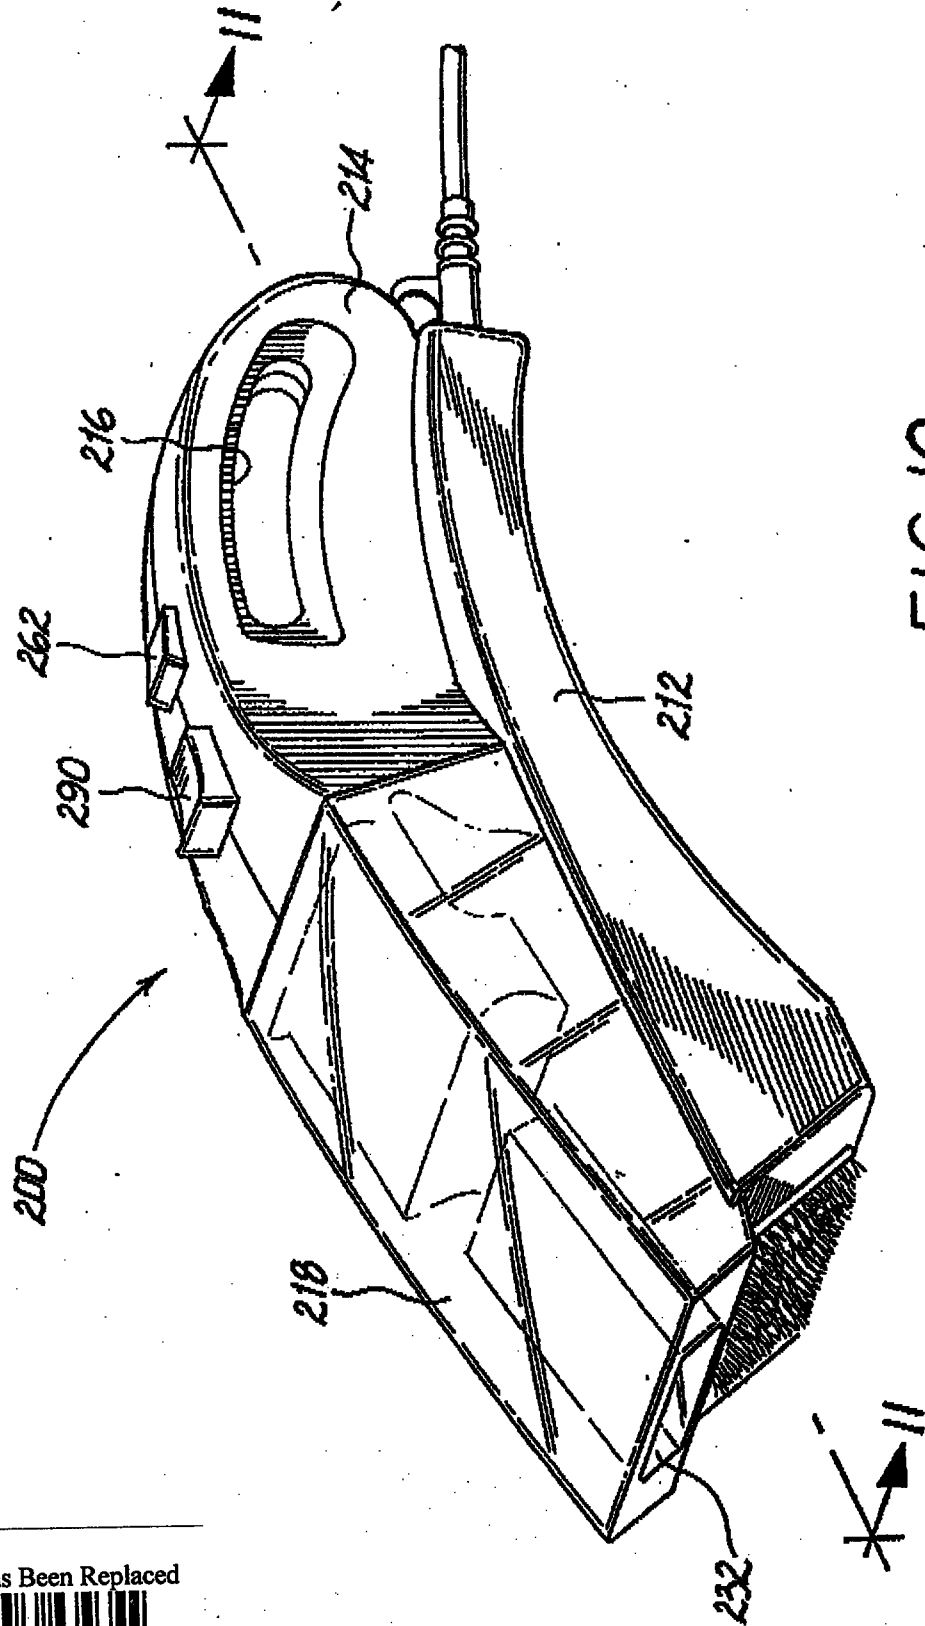


FIG. 10

This Sheet Has Been Replaced



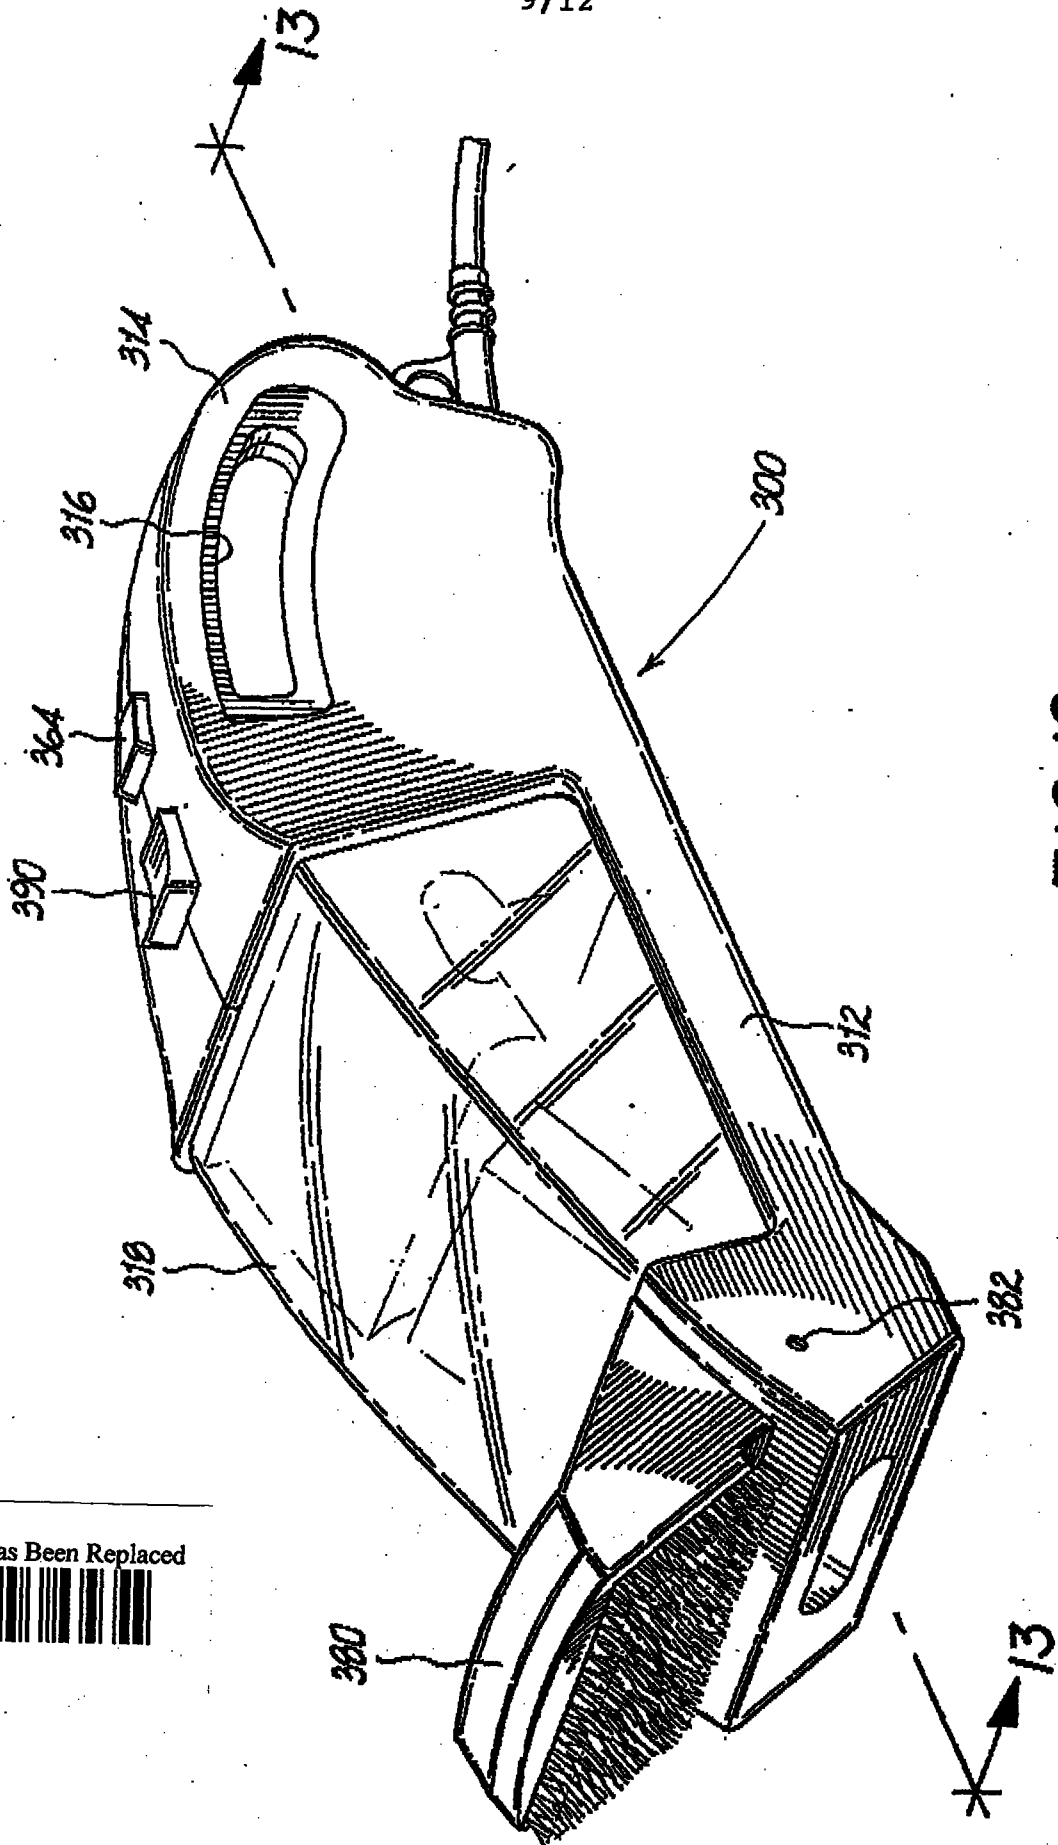


FIG. 12

This Sheet Has Been Replaced



FIG. 14


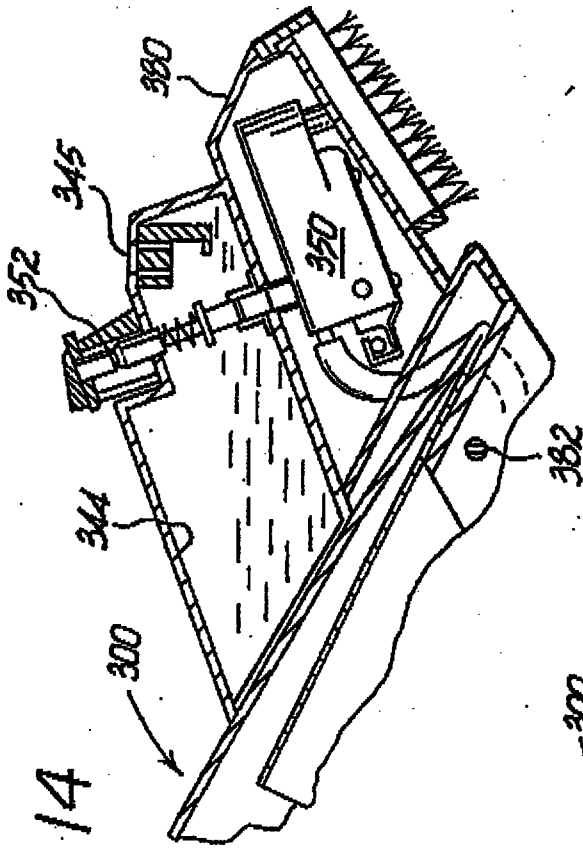


FIG. 13

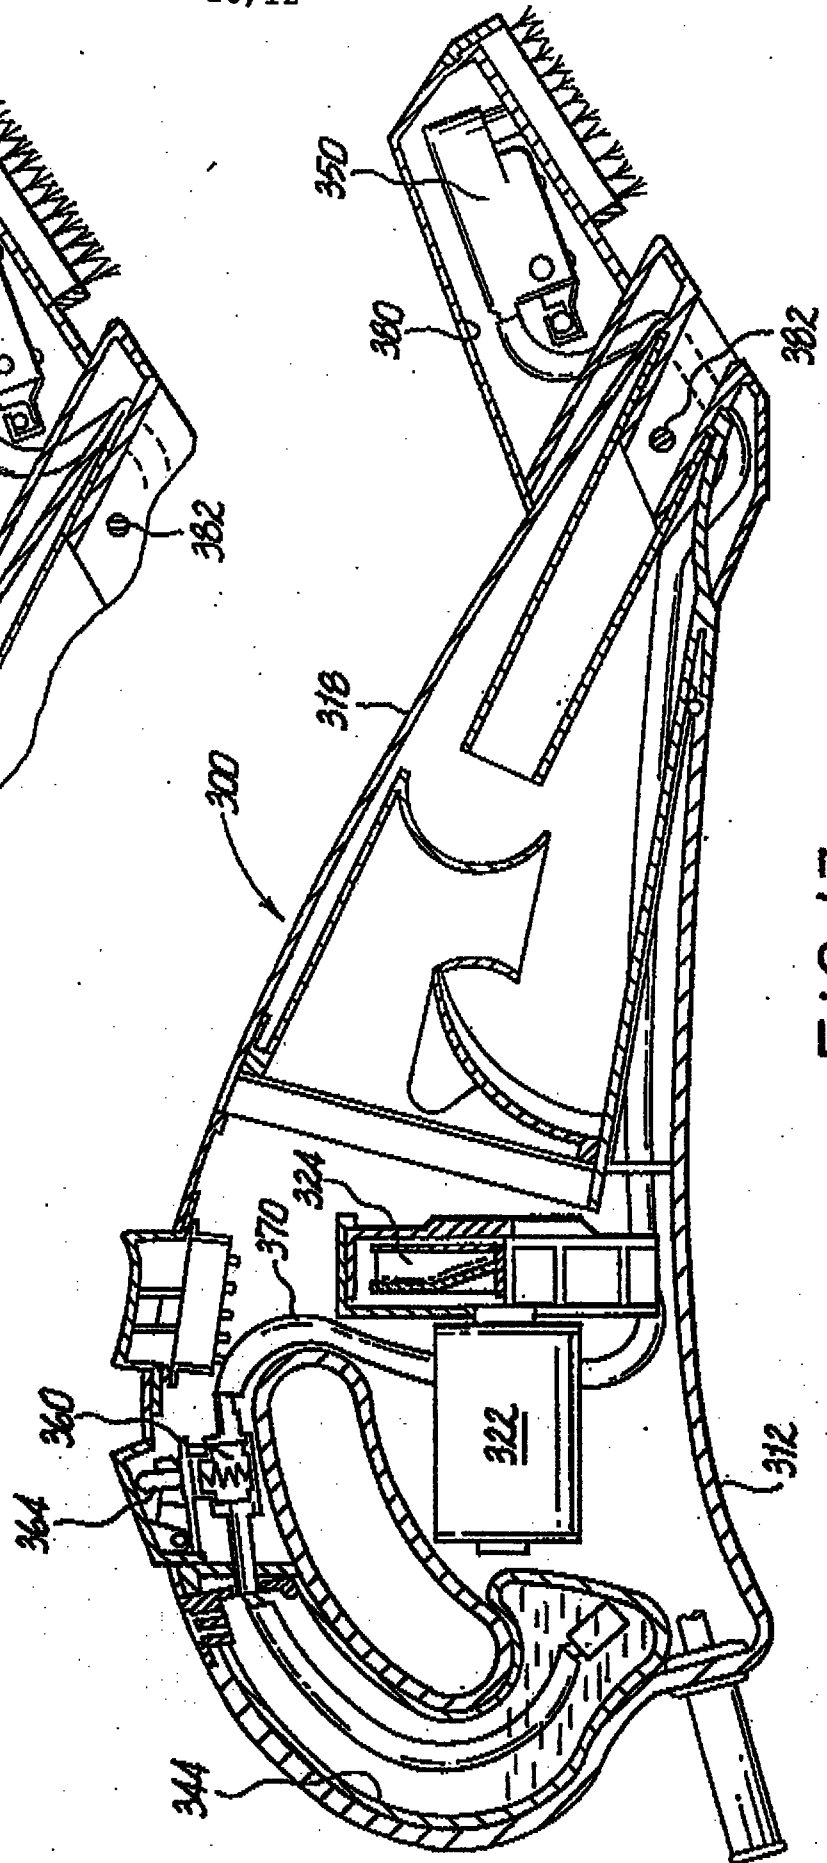

This Sheet Has Been Replaced



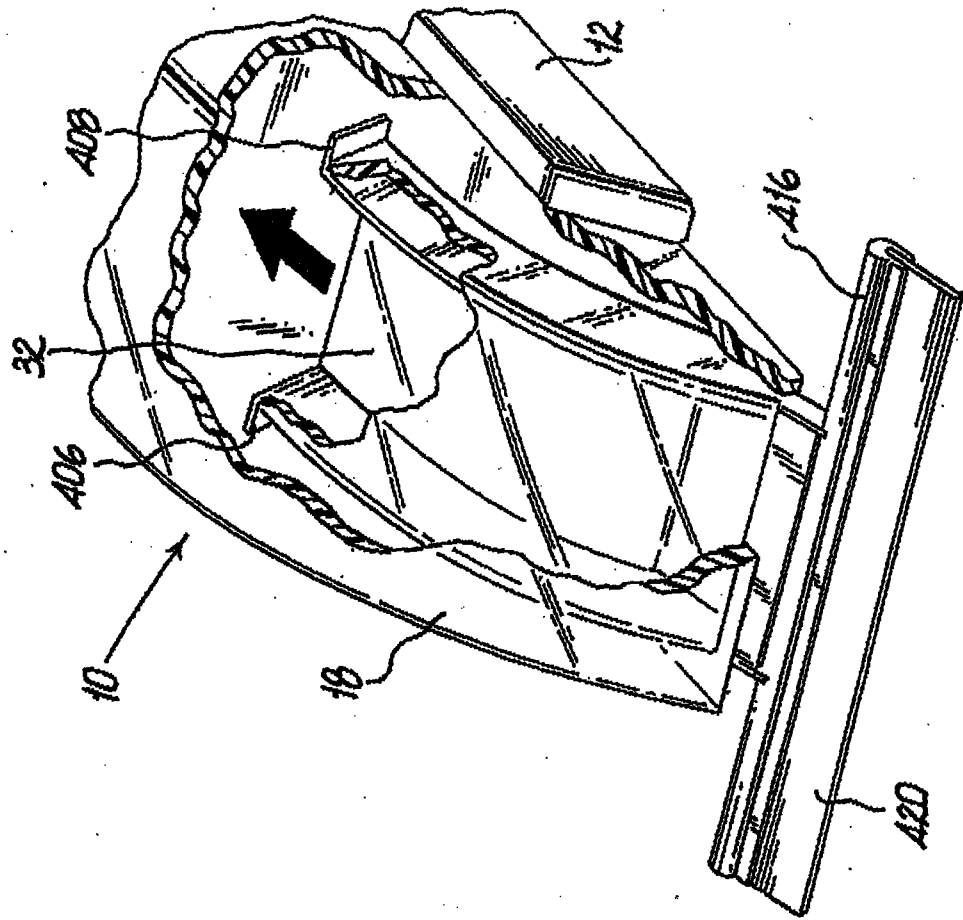


FIG. 16

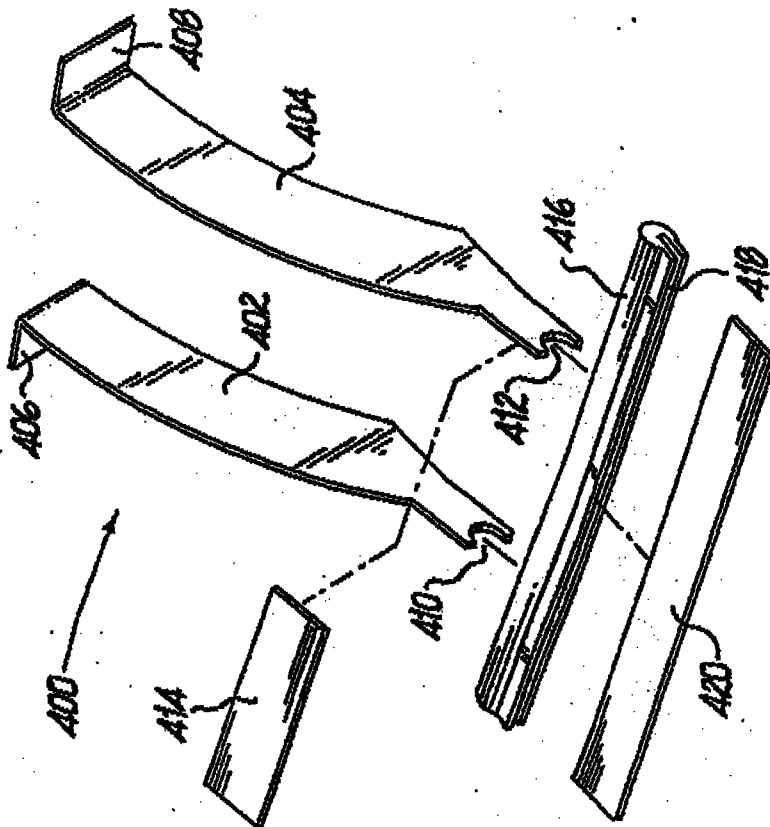


FIG. 15





12/12

FIG. 18


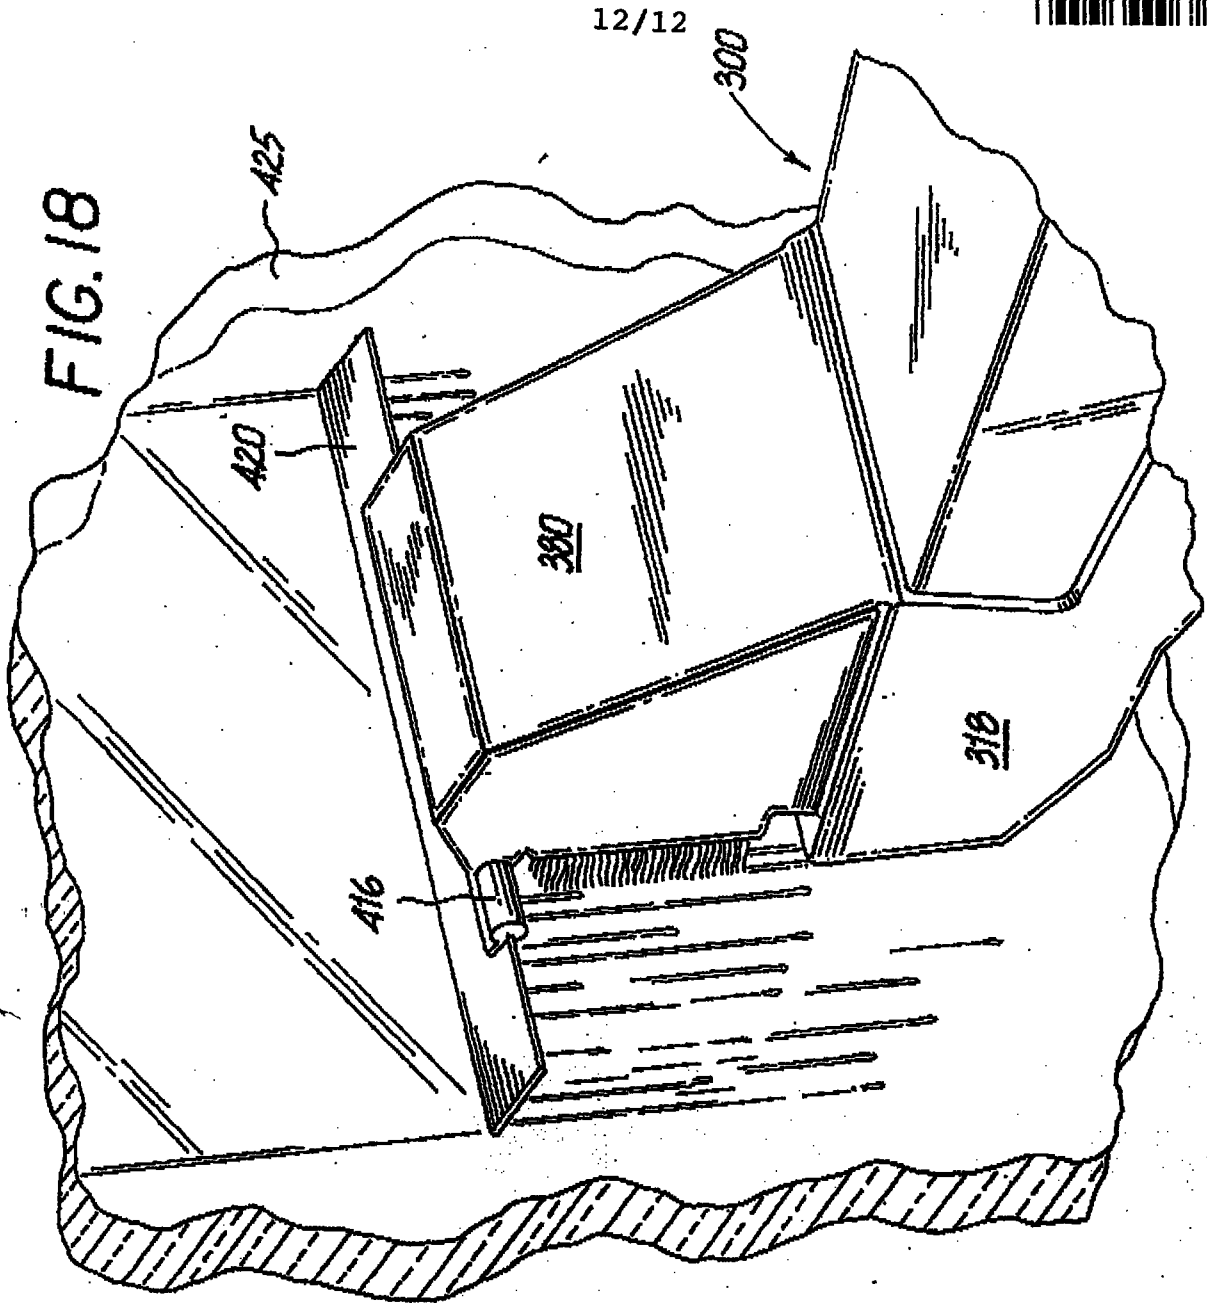


FIG. 17

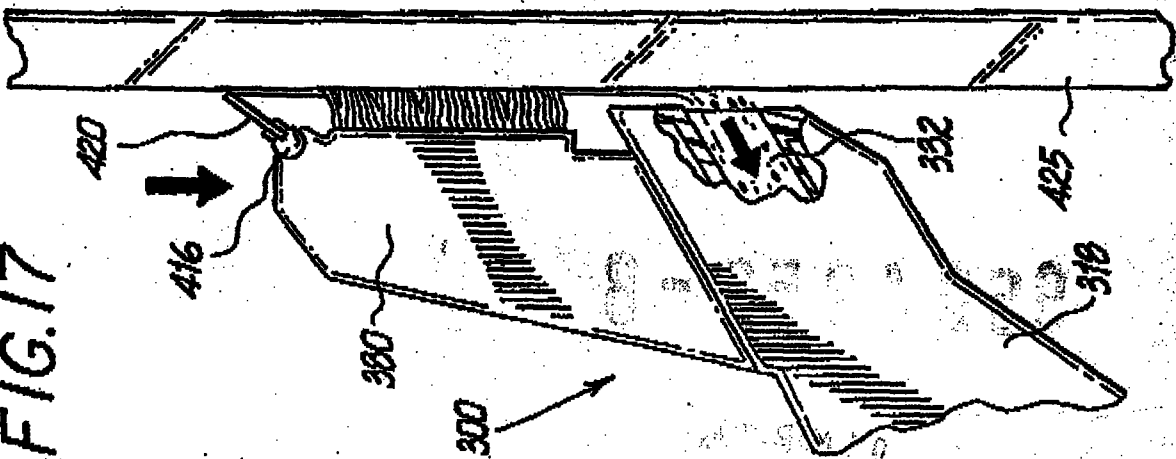

REPLACED SHEETS		SG
3 to 8, 15, 16		
☒	Description : paged	 to paged
☒	Claim(s) : paged	19 to paged 21
☐	Drawing(s) : paged	 to paged
☐	Abstract : paged	 to paged

1 -

REPLACEMENT SHEETS		SG
☒	Description : paged	1 to paged 18
☒	Claim(s) : paged	19 to paged 21
☐	Drawing(s) : paged	 to paged
☒	Abstract : paged	22 to paged
DATE OF RECEIPT 5-9-1996		

PORTABLE STEAM VACUUM CLEANER

WITH SQUEEGEE

BACKGROUND OF THE INVENTION

Field of the Invention

- 5 This invention relates to portable vacuum cleaners, and more particularly to a portable vacuum cleaner adapted to generate steam to clean flat surfaces such as windows.

DESCRIPTION OF RELATED ART

- Portable vacuum cleaners for cleaning solid or liquid
10 materials are well known in the art and are often referred to-as "wet/dry" vacuum cleaners. Conventional wet/dry vacuum cleaners are disclosed for example, in U.S. Patent No. 4,821,366 to Levine, U.S. Patent No. 4,924,548 to Touya et al., and U.S. Patent No. 5,005,252 to Steiner et al. These
15 devices typically include a motor driven fan enclosed within a housing for producing a vacuum to draw liquid and debris into a collection nozzle. However, conventional wet/dry vacuums are unsuited for cleaning stained fabrics, upholstery, or carpets.

20

- Improvements have been made in wet/dry vacuum cleaners in an effort to increase their stain cleaning effectiveness. For example, U.S. Patent No. 4,788,738 to Mortson et al. discloses a portable vacuum cleaner having an internal
25 cleaning fluid supply system disposed in a removable discharge head which includes a chamber for retaining the

This is the replacement sheet

Date: - 5 SEP 1996

cleaning fluid, a spray nozzle for discharging the cleaning fluid to the surface to be cleaned, and a vacuum intake head for drawing excess fluid and debris into the vacuum. A vacuum blower unit is provided in communication with the discharge head for creating suction to draw the excess cleaning fluid from the surface and for pumping cleaning fluid from the spray nozzle. A similar vacuum cleaner is described in U.S. Patent No. 4,930,178 to Monson et al which incorporates a filter element for separating debris from the cleaning fluid which enables the cleaning fluid to be recycled for subsequent use. Often, however, it may be undesirable to apply cleaning fluids directly to fabric, upholstery, or carpets, because fading, deterioration or other damage may result.

15

It is desirable therefore, to provide a portable vacuum cleaner which is capable of generating steam for delivery to an area to be cleaned, which overcomes the disadvantages of the prior art by providing for both steam cleaning and normal vacuuming.

20

Furthermore, it is often desirable to utilize a wet dry vacuum to collect liquids such as spills or to collect liquids on flat surfaces such as floors, windows, tables, etc. A problem associated with prior art devices is the "pushing" of the liquid as the vacuum is advanced across the

This is the replacement sheet

Date: - 5 SEP 1996

spill, requiring an excessive amount of strokes to pick up the liquid.

A portable steam cleaning device which is adapted for cleaning windows is described in U.S. Patent No. 2,832,086 to Wells. This device includes a housing defining a steam generating chamber, a nozzle assembly for ejecting steam to a window surface to be cleaned, and a squeegee blade for wiping the window clean after steam has been applied thereto. However, this device does not provide a mechanism for removing and collecting liquid from the window after it has been wiped by the squeegee, and instead the liquid tends to collect on the window sill or floor and must be manually removed.

It is desirable therefore, to provide a vacuum cleaning device which is capable of generating steam for delivery to a flat surface such as a window, floor or table to be cleaned and which is capable of subsequently directing and collecting the liquid from the surface after it has been wiped clean.

SUMMARY OF THE INVENTION

The portable steam vacuum cleaner of the subject invention comprises a housing having a handle portion and a nozzle portion. A reservoir is provided in the housing for retaining water or a cleaning solution such as, for example,

This Sheet Has Been Replaced



Replaced by Amendment sheet

Date: 10 SEP 1995

soapy water, and means are associated with the reservoir for heating the liquid so as to generate steam for delivery to an area to be cleaned.

5 In one embodiment of the invention, means are provided for pumping the liquid from the reservoir to the heating means. Alternatively, another embodiment of the invention provides conduit means for communicating the reservoir with the heating means and associated valve means for selectively
10 transferring liquid from the reservoir to the heating means via the conduit means. Preferably, the heating means comprises a compact heating unit having a body portion which defines an entry port for receiving liquid from chambers in communication with the reservoir, a plurality of cascading
15 steam generating the entry port for gradually heating the liquid flowing therethrough, and a plurality of exit ports in communication with one of the steam generating chambers for ejecting pressurized steam from the heating unit to an area to be cleaned.

20

A motor driven fan assembly is disposed within the housing of the vacuum cleaner and is in communication with the nozzle portion thereof for drawing excess liquid and debris into the nozzle portion. In addition, means are associated
25 with the nozzle portion of the vacuum for containing the debris and excess liquid which is drawn into the nozzle

This Sheet Has Been Replaced



This is the replacement sheet

Date: - 5 SEP 1996

portion by the motor driven fan assembly. Preferably, structure is defined within the nozzle portion for separating liquid from the air flow drawn into the vacuum.

5 In another embodiment of the subject invention, the portable steam vacuum cleaner is particularly adapted to clean flat surfaces such as windows and includes a squeegee assembly for wiping a window after steam has been delivered thereto and directing the condensed liquid towards the nozzle
10 portion of the vacuum cleaner for collection. The squeegee assembly is preferably removably mounted to the housing of the vacuum cleaner adjacent the nozzle portion thereof and includes a replaceable squeegee blade. In operation, steam is generated within the housing, and is delivered to the
15 surface to be cleaned, such as a window. The window is then wiped with the squeegee blade, and the excess liquid is drawn into the nozzle portion of the housing where it is subsequently contained. The device may also be utilized to contain and direct large spills to the vacuum port by
20 guiding the liquid with the squeegee blade as the vacuum collects the liquid.

Further features of the invention, its nature, and various advantages will become more apparent to one skilled in the
25 art to which the subject invention appertains from the following detailed description of the invention taken in

This Sheet Has Been Replaced



This is the replacement sheet

Date: 5 SEP 1996

conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the subject invention will be described hereinbelow with reference to the drawings
5 wherein:

Fig. 1 is a perspective view of a portable steam vacuum cleaner in accordance with a preferred embodiment of the subject invention;

10

Fig. 2 is a side cross-sectional view taken along line 2-2 of Fig. 1;

Fig. 3 is a bottom plan view of the portable steam vacuum
15 cleaner of Fig. 1;

Fig. 4 is a top plan view of the portable steam vacuum cleaner of Fig. 1;

20 Fig. 5 is a perspective view of the heating unit for generating steam within the portable vacuum cleaner of Fig. 1;

Fig. 6 is a bottom plan view of the heating unit of Fig. 5;

25

Fig. 7 is a top plan view of the heating unit of Fig. 5;

This Sheet Has Been Replaced



This is the replacement sheet

Date: 07 SEP 1996

Fig. 8 is a side elevational view of the heating unit of Fig. 5;

Fig. 9 is a front elevational view of the heating unit of
5 Fig. 5;

Fig. 10 is a perspective view of another embodiment of the portable steam vacuum cleaner in accordance with the subject invention;

10

Fig. 11 is a side cross-sectional view taken along line 11-11 of Fig. 10;

Fig. 12 is a perspective view of yet another embodiment of
15 the portable steam vacuum cleaner in accordance with the subject invention;

Fig. 13 is a side cross-sectional view taken along line 13-13 of Fig. 12;

20

Fig. 14 is a cross-sectional view of an alternate embodiment of the portable steam vacuum cleaner of Fig. 13;

Fig. 15 is an exploded perspective view of a squeegee
25 assembly in accordance with a preferred embodiment of the subject invention;

This Sheet Has Been Replaced



This is the replacement sheet

Date: 5 SEP 1996

Fig. 16 is a perspective view in partial cross-section of the vacuum cleaning apparatus of Fig. 1 in conjunction with the squeegee assembly of Fig. 15;

- 5 Fig. 17 is a side elevational view of the vacuum cleaning apparatus of Fig. 12 in conjunction with the squeegee assembly of Fig. 15; and

Fig. 18 is a perspective view of the vacuum cleaning
10 apparatus of Fig. 17 during a cleaning operation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now in detail to the drawings in which like reference numerals identify similar or identical elements, a preferred embodiment of the portable steam vacuum cleaner
15 of the subject invention is illustrated in Fig. 1, and is designated generally by reference numeral 10. Vacuum cleaner 10 basically comprises a housing 12 which includes a handle portion 14 defining a handle grip 16, and a nozzle portion 18 preferably detachably mounted adjacent housing
20 12. Nozzle portion 18 may be released from housing 12 by movement of a clamp member 20 which may be manipulated by a user for gaining access to the interior of the vacuum cleaner 10.

- 25 Referring to Fig. 2, a motor 22 is enclosed within housing 12 for driving a fan 24 mounted for rotation relative to

This Sheet Has Been Replaced



This Sheet Has Been Replaced

Date - 5 SEP 1996

motor 22. Rotation of fan 24 creates suction for drawing debris and liquids into the nozzle portion 18 of vacuum cleaner 10. A sealing member 26 is disposed between fan 24 and motor 22 for preventing liquid from contacting the motor 5 22 during wet vacuuming. In addition, a liquid separator 28 is defined in nozzle portion 18 which includes structure for preventing liquid drawn into nozzle portion 18 during wet vacuuming from entering, the cavity 30 in which the motor 22 and fan 24 are located, while prohibiting debris from 10 contacting fan 24 during dry vacuuming. In particular, water drawn into an uptake port 32 of nozzle portion 18 will be directed towards a diverting wail 34 of arcuate configuration which diverts the liquid into a containing area 36 formed in nozzle portion 18, while permitting air to 15 be directed into a filter chamber 38 in which a filter element 40 is disposed for removing debris from the air flow. Air, drawn through filter element 40, is subsequently exhausted through a plurality of vents 42 which are formed in the lateral walls of housing 12 (see Fig. 1).

20

A reservoir chamber 44 is formed in the nozzle portion 18 of vacuum cleaner 10 for retaining water or a cleaning solution. Reservoir chamber 44 may be filled with the liquid in a conventional manner such as through an aperture 46 25 provided in clamp structure 20. A conduit 48 extends through a valve 52 from reservoir chamber 44 to a heating unit 50

This is the replacement sheet

Date: 8-5-80 1996

which is provided for generating steam for delivery to an area to be cleaned. Conduit 48 permits gravitational flow of liquid from the reservoir 44 to the heating unit 50. Control valve 52 is associated with conduit 48 for
5 selectively controlling the flow of liquid from the reservoir 44 to the heating unit 50.

Turning to Figs. 5-9, the heating unit 50 comprises a body portion 52 of substantially rectangular configuration having
10 a cover panel 54 mountable to body portion 52 at a plurality of standoff locations 56 disposed in spaced relation about the periphery of body portion 52. Preferably, heating unit 50 is constructed of cast aluminum or a like material. An entrance port 58 extends through a side wall 60 of body
15 portion 52 through which liquid from reservoir chamber 44 flows via conduit 48. Entrance port 58 communicates with a plurality of cascading steam generating chambers defined in body portion 52 including a primary steam generating chamber 62 of a generally inverted shaped configuration. Opposed
20 lateral dams 64 and 66 are formed at the head of primary steam generating chamber 62 for limiting the flow of heated liquid from the primary steam generating chamber 62 to a pair of secondary lateral steam generating chambers 68 and 70 of generally J-shaped configuration. Secondary dams 72
25 and 74 are formed at the trailing ends of lateral steam generating-chambers 68 and 70 respectively, for limiting the

This is the replacement sheet

Date: - 5 SEP 1996

flow of liquid into a tertiary steam generating chamber 76. A tertiary dam 78 separates the tertiary steam generating chamber 76 from a steam ejection chamber 80 which has a plurality of exit ports 82 defined therein through which
5 steam generated by heating unit 50 is delivered to an area to be cleaned. A heating element such as cal-rod heating tube 84 is provided and is preferably cast integral with body portion 52 for transferring heat to the cascading steam
10 generating chambers. Cal-rod heating tube 84 includes terminals 86 and 88 which are in electrical connection with a power supply source of alternating current from power cord 90.

A bimetallic thermostat 92 is mountable within an annular
15 cavity 94 provided in the bottom surface 96 of the body portion 52 of the heating unit 50 by a pair of opposed mounting flanges 98 and 100 (see Fig. 6). The thermostat automatically controls the operation of heating unit 50. Referring to Fig. 2, a scrubbing brush 102 is detachably
20 mounted to the housing 12 of vacuum cleaner 10 adjacent exit ports 82 of heating unit 50 for assisting cleaning operations.

In operation, the portable steam vacuum cleaner 10 of the
25 subject invention may be prepared for use by connecting the unit to an electrical outlet through power cord 90. After

approximately one minute, the cal-rod heating tube 84 will have transferred sufficient heat to the body portion 52 of heating unit 50 so as to generate steam once liquid is introduced. Thus, at a desired time, the user may depress
5 control valve 52 to cause cleaning solution or water to gravitate from the reservoir 44 into the primary steam generating chamber 62 of heating unit 50 via conduit 48. Upon entering the primary steam generating chamber 62, the liquid will begin to increase in temperature and pressure
10 whereby heated liquid will transfer into the secondary lateral steam generating chambers 68 and 70 by traversing lateral dams 64 and 66. The temperature and pressure of the liquid is further increased in steam generating chambers 68 and 70 until such time as it flows into the tertiary steam
15 generating chamber 76 by passing over secondary dams 72 and 74. Once introduced into the tertiary chamber 76 of heating unit 50, the temperature of the liquid is sufficiently increased to generate steam which traverses tertiary dam 78 and enters into the ejection chamber 80 where it is ejected
20 under pressure through the ejection ports 82 to the area to be cleaned. As steam is ejected from the heating unit 50, the user may manipulate the device to employ scrub brush 102 which will assist in the cleaning task.

25 Once the stain has been removed and the area cleaned, the user may depress a toggle switch 104 located adjacent handle

This is the replacement sheet

Date: 10 SEP 1946

16 which activates the motor driven fan 24, thereby creating a vacuum for drawing debris and the excess liquid created by the condensed steam into the uptake port 32 of nozzle portion 18. Liquid drawn into uptake portion 32 is
5 advantageously directed toward the diverting wall 34 of separator structure 28 and into the liquid containing area 36, while air flow is directed through filter chamber 38, against filter element 40, and subsequently through the exhaust vents 42 formed in the wall of housing 12.

10

Turning to Figs. 10 and 11, another embodiment of the portable steam vacuum cleaner in accordance with the subject invention is illustrated and designated generally by reference numeral 200. Vacuum cleaner 200 comprises a
15 housing 212 having a handle portion 214 defining a handle grip 216, and a nozzle portion 218. A motor 222 and fan 224 are enclosed within housing 212 for creating a vacuum to draw debris and liquid into the nozzle portion 218 through an uptake port 232. A reservoir 244 is defined in the handle
20 portion 214 of vacuum cleaner 200 which may be filled with water or cleaning solution through an aperture 215 extending through the wall thereof.

A pump 260 is provided in vacuum cleaner 200 operable by a
25 toggle switch 262 for pumping liquid from reservoir 244 to a heating unit 250. A delivery tube 264 extends from the

This is the replacement sheet

Date: 5 SEP 1936

reservoir 244 to pump 260, and an outlet tube 266 extends from pump 260 through housing 212 to an entrance port 258. A relief valve 268 may be provided for returning liquid to reservoir 244 from heating unit 250 via a tubular conduit
5 270 in the event of over pressurisation. Valve 268 is provided in the cover panel 254 of heating unit 250. An external relief valve 272 is associated with tubular conduit 270 for releasing pressure outside the vacuum 200.

10 In operation, vacuum cleaner 200 is prepared for use by heating the unit 250 for a sufficient period of time, and thereupon depressing the toggle switch 262 so that pump 260 delivers liquid to heating unit 250 where it is sufficiently heated to generate pressurized steam for delivery to an area
15 to be cleaned. Thereafter, the motor driven fan 224 is activated by depressing switch 290 to draw excess liquid and debris into the nozzle portion 218 of vacuum cleaner 200.

Referring to Figs. 12 and 13, yet another embodiment of the
20 portable steam vacuum cleaner of the subject invention is illustrated and is designated generally by reference numeral 300. Vacuum cleaner 300 is substantially similar to vacuum cleaner 200 in that it comprises a pump 360 operable by a toggle switch 364 for transferring liquid from a reservoir
25 344 defined in a handle portion 314 to a heating unit 350 via a tubular conduit 370 extending through the housing

THIS IS BE DISCLOSED HERE

5 SEP 1996

portion 312 thereof. Vacuum cleaner 300 differs however, in that the heating unit 350 is enclosed within a chamber 380 which is pivotably mounted with respect to the housing 312 thereof by a pivot pin 382. By mounting the heating unit 350
5 in this manner, the range of operability of vacuum cleaner 300 is substantially increased.

Referring to Fig. 14, an alternate embodiment of vacuum cleaner 300 is illustrated wherein the reservoir 344 is
10 positioned adjacent heating unit 350 enclosed within chamber 380 and adapted to be filled through an aperture 345 associated therewith. Arranged in this manner, a pump is not required for transferring the liquid from the reservoir to the heating unit. Instead, a conduit 348 extends from the
15 reservoir 344 to heating unit 350 and includes a manually operated control valve 352 for selectively controlling the flow of liquid to heating unit 350.

In use, cleaning solution or water is delivered from
20 reservoir 344 to the heating unit 350 by depressing the control valve 352 to allow liquid to gravitate into heating unit 350 where it is generated into pressurised steam for delivery to an area to be cleaned.

25 Turning now to Fig. 15, there is illustrated a squeegee assembly designated generally by reference numeral 400 and



configured to be mounted adjacent the nozzle portion of vacuum cleaner 10 which is described hereinabove and illustrated in Figs. 1-4.

- 5 More particularly, as best seen in Fig. 16, squeegee assembly 400 is adapted to detachably mount within uptake port 32 of the nozzle portion 18 of vacuum cleaner 10. Squeegee assembly 400 comprises a pair of mounting brackets 402 and 404 each having an outwardly extending rear flange 10 406 and 408, respectively, and a respective forward engaging fork 410 and 412. The rear flanges 406 and 408 are configured to engage the side walls of uptake port 32 at the trailing end thereof. A bridge member 414 rigidly connects the forward portions of brackets 402 and 404 and permits the 15 relative inward flexure of the rear portion thereof to facilitate the unobstructed insertion of the brackets 402 and 404 into uptake port 32 for mounting the squeegee assembly 400.
- 20 Squeegee assembly 400 further comprises a blade retention member 416 dimensional and configured to be received within the forward engaging forks 410 and 412 of mounting brackets 402 and 404. Retention member 416 includes an elongated engagement slot 418 for releasably retaining a replaceable 25 squeegee blade 420. The squeegee blade 420 is preferably formed from a strip of material, such as, for example,

This Sheet Has Been Replaced



This is the replacement sheet

Date: 5 SEP 1986

rubber or a similar flexible material.

Referring to Figs. 17 and 18, an alternative embodiment of the squeegee assembly of the subject invention is
5 illustrated in conjunction with vacuum cleaner 300 which is described hereinabove and illustrated in Figs. 12-14. In this embodiment of the window cleaning apparatus, the blade retention member 416 is mounted adjacent the scrubbing brush provided on chamber 380. Member 416 may be detachably
10 mounted to vacuum cleaner 300, or alternatively, may be integrally constructed with vacuum cleaner 300. In operation, steam generated by the heating unit 350 disposed within chamber 380 is delivered to a surface to be cleaned such as window 425 as described in detail hereinabove with
15 respect to vacuum cleaner 300. Shortly thereafter, utilizing squeegee blade 420, the operator wipes the steamed window 425 in a continuous downward stroke. As liquid is wiped from the window 425 by squeegee blade 420, it is drawn into the uptake port 332 of nozzle portion 318 and transferred into
20 the liquid containing area formed therein.

To the extent not already indicated, it also will be understood by those of ordinary skill in the art to which the subject invention appertains that any one of the various
25 specific embodiments herein described and illustrated may be further modified to incorporate features shown in other of

the specific embodiments. For example, the vacuum cleaner
may be utilized to steam clean large surfaces by directing
the deposited liquid towards the vacuum uptake port, or to
vacuum large spills by gathering the spill with the squeegee
5 blade while collecting the spill with the vacuum.

Although the subject invention has been shown and described
with respect to a preferred embodiment, it will be
understood by those skilled in the art that various
10 modifications and changes may be made therein without
departing from the spirit and scope of the invention as
defined by the appended claims.

15



CLAIMS

1. An apparatus for cleaning flat surfaces comprising:
 - a) a housing having a handle portion and a nozzle portion;
 - 5 b) a squeegee assembly mounted to said housing adjacent said nozzle portion for wiping a flat surface; and
 - c) collection means for drawing liquid from the surface into said nozzle portion.
- 10 2. An apparatus as claimed in claim 1 further comprising a reservoir defined in said housing for retaining clean liquid for delivery to the flat surface.
3. An apparatus as claimed in claim 2 further comprising
15 means for heating the clean liquid so as to generate steam for delivery to the flat surface.
4. An apparatus as claimed in claim 3 further comprising means for transferring the clean liquid from said reservoir
20 to said heating means.
5. An apparatus as claimed in and preceding claim wherein said collection means comprises a motor driven fan assembly disposed in said housing and communicating with said nozzle
25 portion.



* C L M S *

This is the replacement sheet

Date: 5 SEP 1996



- 20 -

6. An apparatus as claimed in claim 5 wherein said collection means further comprises means for containing the liquid drawn from the flat surface.

5 7. An apparatus as claimed in any preceding claim wherein said squeegee assembly is removably mounted adjacent said nozzle portion.

8. An apparatus as claimed in claim 7 wherein said
10 squeegee assembly includes a replaceable squeegee blade formed of a flexible material.

9. An apparatus for cleaning flat surfaces as claimed in any of claims 2-8 further comprising means for delivering
15 the clean liquid to the flat surface to be cleaned.

10. An apparatus as claimed in any of claims 3-9 further comprising valve means for selectively transferring the clean liquid from said reservoir to said heating means.

20

11. An apparatus as claimed in claim 8 wherein said squeegee assembly is detachably mounted adjacent said nozzle portion and the replaceable squeegee blade is formed from a strip of rubber.

25

12. An apparatus as claimed in any of claims 3-11 wherein

This is the replacement sheet



Date: 25 SEP 1996

said heating means comprises an enclosure defining an entry port for receiving clean liquid from said reservoir, a plurality of cascading steam generating chambers in communication with said entry port, and at least one exit
5 port in communication with at least one of said steam generating chambers of releasing steam from said enclosure.

13. An apparatus as claimed in claim 12 wherein said heating means further comprises a heating coil in
10 association with said enclosure for transferring heat to said plurality of steam generating chambers, whereby the operation of said heating coil is controlled by a thermostat.

This Sheet Has Been Replaced



* C L M S *

This is the replacement sheet

Date 17 SEP 1988

ABSTRACT OF THE DISCLOSURE

PORTABLE STEAM VACUUM CLEANER WITH SQUEEGEE

A vacuum cleaning apparatus is provided which includes a
5 housing having a handle portion and a nozzle portion. A
reservoir is defined in the housing for retaining cleaning
solution or water, and a heating unit is associated with the
reservoir for heating the liquid so as to generate steam for
delivery to a flat surface such as a window to be cleaned.
10 A squeegee assembly is mounted to the housing adjacent the
nozzle portion for wiping the window after liquid has been
deposited thereon. A motor driven fan assembly is disposed
within the housing in communication with the nozzle portion
for drawing excess liquid and debris into the nozzle
15 portion. The nozzle portion defines structure for separating
and containing the liquid which is drawn into the apparatus.

(Fig. 16)

8-331138

This is the replacement sheet

Date: - 5 SEP 1996

REPLACED SHEETS SG

☒ Description : paged 15 to paged 16
☐ Claim(s) : paged 1 to paged 1
☐ Drawing(s) : paged 1 to paged 1
☐ Abstract : paged 1 to paged 1

REPLACEMENT SHEETS SG

☒ Description : paged 15 to paged 16
☐ Claim(s) : paged 1 to paged 1
☐ Drawing(s) : paged 1 to paged 1
☐ Abstract : paged 1 to paged 1

DATE OF RECEIPT 7-10-96

- 15 -

portion 312 thereof. Vacuum cleaner 300 differs however, in that the heating unit 350 is enclosed within a chamber 380 which is pivotably mounted with respect to the housing 312 thereof by a pivot pin 382. By mounting the heating unit 350 in this manner, the range of operability of vacuum cleaner 300 is substantially increased.

Referring to Fig. 14, an alternate embodiment of vacuum cleaner 300 is illustrated wherein the reservoir 344 is positioned adjacent heating unit 350 enclosed within chamber 380 and adapted to be filled through an aperture 345 associated therewith. Arranged in this manner, a pump is not required for transferring the liquid from the reservoir to the heating unit. Instead, a conduit 348 extends from the reservoir 344 to heating unit 350 and includes a manually operated control valve 352 for selectively controlling the flow of liquid to heating unit 350.

In use, cleaning solution or water is delivered from reservoir 344 to the heating unit 350 by depressing the control valve 352 to allow liquid to gravitate into heating unit 350 where it is generated into pressurised steam for delivery to an area to be cleaned.

Turning now to Fig. 15, there is illustrated a squeegee assembly designated generally by reference numeral 400 and

This Sheet Has Been Replaced



This is the replacement sheet

Date: - 7 OCT 1996

configured to be mounted adjacent the nozzle portion of vacuum cleaner 10 which is described hereinabove and illustrated in Figs. 1-4.

5 More particularly, as best seen in Fig. 16, squeegee assembly 400 is adapted to detachably mount within uptake port 32 of the nozzle portion 18 of vacuum cleaner 10. Squeegee assembly 400 comprises a pair of mounting brackets 402 and 404 each having an outwardly extending rear flange 406 and 408, respectively, and a respective forward engaging fork 410 and 412. The rear flanges 406 and 408 are configured to engage the side walls of uptake port 32 at the trailing end thereof. A bridge member 414 rigidly connects the forward portions of brackets 402 and 404 and permits the
15 relative inward flexure of the rear portion thereof to facilitate the unobstructed insertion of the brackets 402 and 404 into uptake port 32 for mounting the squeegee assembly 400.

20 Squeegee assembly 400 further comprises a blade retention member 416 dimensional and configured to be received within the forward engaging forks 410 and 412 of mounting brackets 402 and 404. Retention member 416 includes an elongated engagement slot 418 for releasably retaining a replaceable
25 squeegee blade 420. The squeegee blade 420 is preferably formed from a strip of material, such as, for example,

This Sheet Has Been Replaced



This is the replacement sheet

Date: - 7 OCT 1996

DATE OF RECEIPT 1-6-1998

spill, requiring an excessive amount of strokes to pick up the liquid.

A portable steam cleaning device which is adapted for cleaning windows is described in US Patent No. 2832086 to Wells. This device includes a housing defining a steam generating chamber, a nozzle assembly for ejecting steam to a window surface to be cleaned, and a squeegee blade for wiping the window clean after steam has been applied thereto. However, this device does not provide a mechanism for removing and collecting liquid from the window after it has been wiped by the squeegee, and instead the liquid tends to collect on the window sill or floor and must be manually removed.

15

It is also known from US 4920608 to provide a portable vacuum cleaner for cleaning flat surfaces comprising:

- a) a housing having a handle portion and a nozzle portion;
- 20 b) motor driven collection means within the housing for drawing liquid from the surface into said nozzle portion; and
- c) a squeegee assembly mounted on said housing adjacent to the nozzle portion for wiping the flat surface.

25

It is desirable therefore, to provide a vacuum cleaning device which is capable of generating steam for delivery

This is the replacement sheet

Date: - 1 JUN 1998

to a flat surface such as a window, floor or table to be cleaned and which is capable of subsequently directing and collecting the liquid from the surface after it has been wiped clean.

5 SUMMARY OF THE INVENTION

A portable steam vacuum cleaner for cleaning flat surfaces according to the present invention is characterised by means for scrubbing the flat surface mounted on the housing adjacent to the nozzle portion
10 and a reservoir in said housing for retaining clean liquid for delivery to the flat surface whilst the vacuum cleaner is in operation.

Preferably, means for heating the clean liquid are
15 provided to generate steam for delivery to the flat surface.

In one embodiment of the invention, means are provided for pumping the liquid from the reservoir to the heating
20 means. Alternatively, another embodiment of the invention provides conduit means for communicating the reservoir with the heating means and associated valve means for selectively transferring liquid from the reservoir to the heating means via the conduit means.
25 Preferably, the heating means comprises a compact heating unit having a body portion which defines an entry port for receiving liquid from chambers in communication with the reservoir, a plurality of cascading steam generating

This is the replacement sheet

Date: - 1 JUN 1990

the entry port for gradually heating the liquid flowing therethrough, and a plurality of exit ports in communication with one of the steam generating chambers for ejecting pressurised steam from the heating unit to
5 an area to be cleaned.

In the preferred embodiment, a motor driven fan assembly is disposed within the housing of the vacuum cleaner and is in communication with the nozzle portion thereof for
10 drawing excess liquid and debris into the nozzle portion. Means are conveniently associated with the nozzle portion of the vacuum for containing the debris and excess liquid which is drawn into the nozzle portion by the motor driven fan assembly. Preferably, structure is defined
15 within the nozzle portion for separating liquid from the air flow drawn into the vacuum.

The squeegee assembly is preferably removably mounted to the housing of the vacuum cleaner adjacent the nozzle
20 portion thereof and includes a replaceable squeegee blade. In operation, steam is generated within the housing, and is delivered to the surface to be cleaned, such as a window. The window is then wiped with the squeegee blade, and the excess liquid is drawn into the
25 nozzle portion of the housing where it is subsequently contained. The device may also be utilized to contain and direct large spills to the vacuum port by guiding the liquid with the squeegee blade as the vacuum collects the

This is the replacement sheet

Date: - 1 JUN 1998

liquid.

Further features of the invention, its nature, and various advantages will become more apparent to one skilled in the art to which the subject invention appertains from the following detailed description of the preferred embodiment of the invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Preferred embodiments of the subject invention will be described hereinbelow with reference to the drawings wherein:

Figure 1 is a perspective view of a portable steam vacuum cleaner in accordance with a preferred embodiment of the subject invention, the squeegee assembly being omitted from the Figure for clarity;

Figure 2 is a side cross-sectional view taken along line 2-2 of Figure 1;

20 Figure 3 is a bottom plan view of the portable steam vacuum cleaner of Figure 1;

Figure 4 is a top plan view of the portable steam vacuum cleaner of Figure 1;

Figure 5 is a perspective view of the heating unit for generating steam within the portable vacuum cleaner of Figure 1;

Figure 6 is a bottom plan view of the heating unit of Figure 5;

This is the replacement sheet

Date: 1 JUN 1998

Figure 7 is a top plan view of the heating unit of Figure 5;

Figure 8 is a side elevational view of the heating unit of Figure 5;

5 Figure 9 is a front elevational view of the heating unit of Figure 5;

Figure 10 is a perspective view of another embodiment of the portable steam vacuum cleaner in accordance with the subject invention, the squeegee assembly being omitted
10 from the Figure for clarity;

Figure 11 is a side cross-sectional view taken along line 11-11 of Figure 10;

Figure 12 is a perspective view of yet another embodiment of the portable steam vacuum cleaner in accordance with
15 the subject invention, the squeegee assembly being omitted from the Figure for clarity;

Figure 13 is a side cross-sectional view taken along line 13-13 of Figure 12;

Figure 14 is a cross-sectional view of an alternate
20 embodiment of the portable steam vacuum cleaner of Figure 13;

Figure 15 is an exploded perspective view of the squeegee assembly which is fitted to the preferred embodiment of the subject invention illustrated in Figures 1 to 4;

25 Figure 16 is a perspective view in partial cross-section of the vacuum cleaner apparatus of Figure 1 in conjunction with the squeegee assembly of Figure 15;

Figure 17 is a side elevational view of the vacuum

This is the replacement sheet

Date: 5 1 JUN 1938

cleaning apparatus of Figure 12 in conjunction with a second alternative embodiment of squeegee assembly used in the embodiments of Figures 12-14; and" Figure 18 is a perspective view of the vacuum cleaning apparatus of Figure 17 during a cleaning operation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now in detail to the drawings in which like reference numerals identify similar or identical elements, a preferred embodiment of the portable steam vacuum cleaner of the subject invention is illustrated in Figure 1, and is designated generally by reference numeral 10. Vacuum cleaner 10 basically comprises a housing 12 which includes a handle portion 14 defining a handle grip 16, and a nozzle portion 18 preferably detachably mounted adjacent housing 12. Nozzle portion 18 may be released from housing 12 by movement of a clamp member 20 which may be manipulated by a user for gaining access to the interior of the vacuum cleaner 10.

Referring to Figure 1, a motor 22 is enclosed within housing 12 for driving a fan 24 mounted for rotation relative to

portion 312 thereof. Vacuum cleaner 300 differs however, in that the heating unit 350 is enclosed within a chamber 380 which is pivotably mounted with respect to the housing 312 thereof by a pivot pin 382. By mounting the
5 heating unit 350 in this manner, the range of operability of vacuum cleaner 300 is substantially increased.

Referring to Figure 14, an alternate embodiment of vacuum cleaner 300 is illustrated wherein the reservoir 344 is
10 positioned adjacent heating unit 350 enclosed within chamber 380 and adapted to be filled through an aperture 345 associated therewith. Arranged in this manner, a pump is not required for transferring the liquid from the reservoir to the heating unit. Instead, a conduit 348
15 extends from the reservoir 344 to heating unit 350 and includes a manually operated control valve 352 for selectively controlling the flow of liquid to heating unit 350.

20 In use, cleaning solution or water is delivered from reservoir 344 to the heating unit 350 by depressing the control valve 352 to allow liquid to gravitate into heating unit 350 where it is generated into pressurised steam for delivery to an area to be cleaned.

25

All the foregoing embodiments are fitted with one of the squeegee assemblies illustrated in Figures 15 to 18 and designated generally by reference numeral 400 and

This is the replacement sheet

Date: - 1 JUN 1998

configured to be mounted adjacent the nozzle portion of vacuum cleaner 10.

More particularly, as best seen in Figure 16, squeegee
5 assembly 400 is adapted to detachably mount within uptake
port 32 of the nozzle portion 18 of vacuum cleaner 10.
Squeegee assembly 400 comprises a pair of mounting
brackets 402 and 404 each having an outwardly extending
rear flange 406 and 408, respectively, and a respective
10 forward engaging fork 410 and 412. The rear flanges 406
and 408 are configured to engage the side walls of uptake
port 32 at the trailing end thereof. A bridge member 414
rigidly connects the forward portions of brackets 402 and
404 and permits the relative inward flexure of the rear
15 portion thereof to facilitate the unobstructed insertion
of the brackets 402 and 404 into uptake port 32 for
mounting the squeegee assembly 400.

Squeegee assembly 400 further comprises a blade retention
20 member 416 dimensional and configured to be received
within the forward engaging forks 410 and 412 of mounting
brackets 402 and 404. Retention member 416 includes an
elongated engagement slot 418 for releasably retaining a
replaceable squeegee blade 420. The squeegee blade 420
25 is preferably formed from a strip of material, such as,
for example,

This is the replacement sheet

Date: - 1 JUN 1998

CLAIMS

1. A portable vacuum cleaner for cleaning flat surfaces comprising:
 - a) a housing (12,212,312) having a handle portion
5 (14,214,314) and a nozzle portion (18,218);
 - b) motor driven collection means within the housing (12,212,312) for drawing liquid from the surface into said nozzle portion (18,218); and
 - c) a squeegee assembly (400) mounted on said housing
10 (12,212,312) adjacent to the nozzle portion (18,218) for wiping the flat surface characterised by means for scrubbing the flat surface mounted on the housing (12,212,312) adjacent to the nozzle portion (18,218) and a reservoir (44,244,344) in
15 said housing (12,212,312) for retaining clean liquid for delivery to the flat surface whilst the vacuum cleaner is in operation.
2. A portable vacuum cleaner as claimed in claim 1
20 characterised by means for heating (50,250,250) the clean liquid so as to generate steam for delivery to the flat surface.
3. A portable vacuum cleaner as claimed in claim 2
25 characterised by means for transferring the clean liquid from said reservoir (44,244,344) to said heating means (50,250,350).



* C L M S *

This is the replacement sheet

Date: 1 JUN 1990

4. A portable vacuum cleaner as claimed in any preceding claim characterised in that the motor (22,222) driven collection means comprises a fan (24,224) assembly communicating with said nozzle portion (18,218).

5

5. A portable vacuum cleaner as claimed in claim 4 characterised in that the collection means further comprises means for containing the liquid drawn from the flat surface.

10

6. A portable vacuum cleaner as claimed in any preceding claim characterised in that the squeegee assembly (400) is removably mounted.

15 7. A portable vacuum cleaner as claimed in claim 6 characterised in that the squeegee assembly (400) includes a replaceable squeegee blade (420) formed of a flexible material.

20 8. A portable vacuum cleaner for cleaning flat surfaces as claimed in any of claims 2-7 characterised by means for delivering the clean liquid to the flat surface to be cleaned.

25 9. A portable vacuum cleaner as claimed in any of claims 2-8 characterised by valve means for selectively transferring clean liquid from the reservoir (44,244,344) to the heating means (50,250,350).



This is the replacement sheet

Date: ~ 1 JUN 1998

10. A portable vacuum cleaner as claimed in claim 7 characterised in that the squeegee assembly (400) is detachably mounted adjacent said nozzle portion (18,218) and the replaceable squeegee blade (420) is formed from
5 a strip of rubber.

11. A portable vacuum cleaner as claimed in any of claims 3-11 characterised in that the heating means (50,250,350) comprises an enclosure defining an entry
10 port (58,258) for receiving clean liquid from said reservoir (44,244,344), a plurality of cascading steam generating chambers in communication with said entry port (58,258) and at least one exit port (82) in communication with at least one of said steam generating chambers for
15 releasing steam from said enclosure.

12. A portable vacuum cleaner as claimed in claim 11 characterised in that the heating means (50,250,350) further comprises a heating coil (84) in association with
20 the enclosure for transferring heat to the plurality of steam generating chambers, the operation of the heating coil (84) being controlled by a thermostat (92).



* C L M S *

This is the replacement sheet

Date: 21 JUN 1998