(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国 际 局

(43) 国际公布日
2022 年 11 月 24 日 (24.11.2022)

WIPO | PCT

(10) 国际公布号
WO 2022/242502 A1

(51) 国际专利分类号:
*G06F 3/0481* (2022.01)

(21) 国际申请号: PCT/CN2022/091884

(22) 国际申请日: 2022 年 5 月 10 日 (10.05.2022)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202110559266.X 2021年5月21日 (21.05.2021) CN

(71) 申请人: 北京字跳网络技术有限公司 (**BEIJING ZITIAO NETWORK TECHNOLOGY CO., LTD.**) [CN/CN]; 中国北京市海淀区紫金数码园4号楼2层0207, Beijing 100190 (CN)。

(72) 发明人: 刘天翔 (**LIU, Tianxiang**); 中国北京市海淀区知春路63号中国卫星通信大厦今日头条小邮局, Beijing 100086 (CN)。

(74) 代理人: 中国贸促会专利商标事务所有限公司 (**CCPIT PATENT AND TRADEMARK LAW OFFICE**); 中国北京市复兴门内大街158号远洋大厦F10层, Beijing 100031 (CN)。

(81) 指定国 (除另有指明，要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国 (除另有指明，要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,

(54) **Title:** DISPLAY METHOD AND APPARATUS, ELECTRONIC DEVICE, AND STORAGE MEDIUM

(54) **发明名称**: 显示方法、装置、电子设备和存储介质

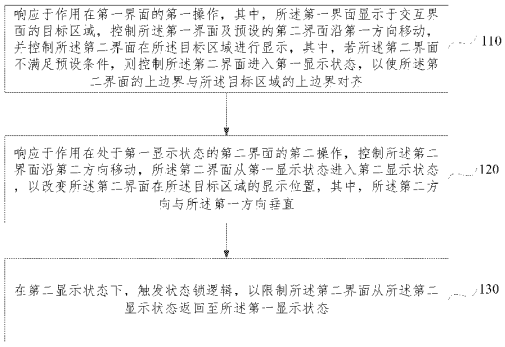


图 1

110 In response to a first operation acting on a first interface, the first interface being displayed on a target area of an interactive interface, control the first interface and a preset second interface to move in a first direction, and control the second interface to display in the target area, wherein if the second interface does not satisfy a preset condition, the second interface is controlled to enter a first display state, so that an upper boundary of the second interface is aligned with an upper boundary of the target area

120 In response to a second operation acting on the second interface in the first display state, control the second interface to move in a second direction, the second interface entering a second display state from the first display state to change the display position of the second interface in the target area, and the second direction being perpendicular to the first direction

130 Trigger a state lock logic in the second display state to limit the second interface to return from the second display state to the first display state

(57) **Abstract:** Disclosed in embodiments of the present disclosure are a display method and apparatus, an electronic device, and a storage medium. The method comprises: in response to a first operation acting on a first interface, the first interface being displayed on a target area of an interactive interface, and controlling the first interface and a preset second interface to move in a first direction, controlling the second interface to display in the target area, wherein if the second interface does not satisfy a preset condition, the second interface is controlled to enter a first display state, so that an upper boundary of the second interface is aligned with an upper boundary of the target area; in response to a second operation acting on the second interface in the first display state, controlling the second interface to move in a second direction, the second interface entering a second display state from the first display state; and triggering a state lock logic to limit the second interface to return from the second display state to the first display state. According to the display method provided by the present disclosure, the display control of the second interface is realized, and the interactive experience is improved.

WO 2022/242502 A1

[见续页]

CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:
— 包括国际检索报告(条约第21条(3))。

**(57) 摘要**: 本公开实施例公开了一种显示方法、装置、电子设备和存储介质，该方法包括：响应于作用在第一界面的第一操作，第一界面显示于交互界面的目标区域，控制第一界面及预设的第二界面沿第一方向移动，并控制第二界面在目标区域进行显示，若第二界面不满足预设条件，则控制第二界面进入第一显示状态，以使第二界面的上边界与目标区域的上边界对齐；响应于作用在处于第一显示状态的第二界面的第二操作，控制第二界面沿第二方向移动，第二界面从第一显示状态进入第二显示状态，触发状态锁逻辑，以限制第二界面从第二显示状态返回至第一显示状态。本公开提供的显示方法，实现了对第二界面的显示控制，有助于提升交互体验。