

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 February 2002 (21.02.2002)


PCT

(10) International Publication Number
WO 02/15360 A1

- (51) International Patent Classification⁷: **H02H 9/00**
- (21) International Application Number: **PCT/US01/41720**
- (22) International Filing Date: 14 August 2001 (14.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/225,497 15 August 2000 (15.08.2000) US
- (71) Applicant (for all designated States except US): **X2Y ATTENUATORS, L.L.C.** [US/US]; 1812 Navy Street, Santa Monica, CA 90504 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ANTHONY, Anthony, A.** [US/US]; 5064 Wolf Run Road, Erie, PA 16505 (US). **ANTHONY, William, M.** [US/US]; 2725 Asbury Road, Erie, PA 16506 (US).
- (74) Agents: **CLARK, Robert, J.** et al.; Oldham & Oldham Co., L.P.A., Twin Oaks Estate, 1225 West Market Street, Akron, OH 44313-7188 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: AN ELECTRODE ARRANGEMENT FOR CIRCUIT ENERGY CONDITIONING

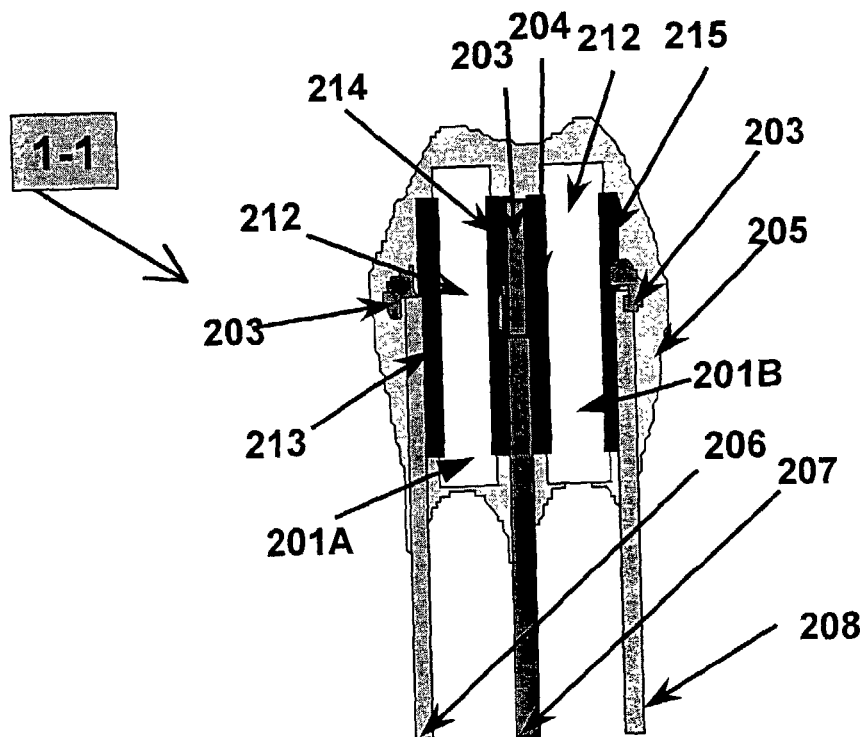

(57) Abstract: A predetermined electrode arrangement (1/1, 1/2, 1/3A, 1/6) comprising a plurality of shielded electrodes (213, 215) and a plurality of shielding electrodes (204, 214, 269A, 269B,) that together with other conductive (799, 206, 208, 207, 203, 218, 216, 217, 218) semi-conductive (not shown) and/or non-conductive material elements (212) are formed into a multi-functional energy condition assembly (1-1, 1-2, 1-3A, 1-6) or variant to be selectively coupled into circuitry (4-1, 5-1, 1-2).



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*