



(51) International Patent Classification:
A47J 27/21 (2006.01)

(21) International Application Number:
PCT/AU2012/001005

(22) International Filing Date:
29 August 2012 (29.08.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2011903480 30 August 2011 (30.08.2011) AU

(71) Applicant (for all designated States except US):
NANGALA PTY LTD [AU/AU]; PO Box 626, Fremantle, Western Australia 6959 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE PETRA, Andy [AU/AU]; 32 March Street, Spearwood, Western Australia 6163 (AU). KHOURY, Edward Joseph [AU/AU]; 19 Scouler Way, Bateman, Western Australia 6150 (AU).

(74) Agent: HOLLIDAY, Neal Joseph; c/- Armour IP, PO Box 67, Burswood, Western Australia 6100 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: KETTLE

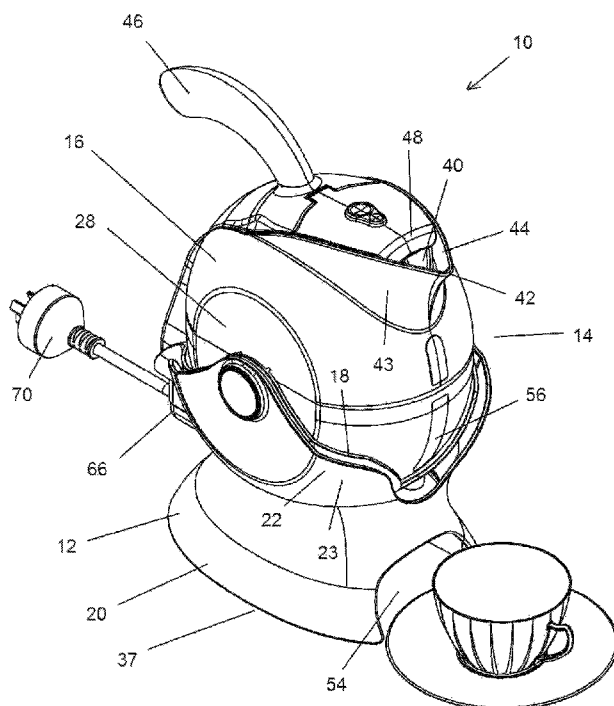


Fig 1

(57) Abstract: A kettle (10) comprising a base (12) and a frame (18) pivotally mounted relative to the base (12). The frame (18) includes first electrical contacts connectable to a power source and a vessel (16) is receivable in and removable from the frame (18). The vessel (16) includes an internal element (60) in connection with second electrical contacts and an opening (40) from which liquid can be poured. When the vessel (16) is received in the frame (18) the first electrical contacts make connection with the second electrical contacts such that power is supplied to the internal element (60) to heat water within the vessel (16). Pivoting of the vessel (16) and frame (18) relative to the base (12) allows pouring of liquid from the opening.

WO 2013/029096 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*