



(51) International Patent Classification:

F16B 7/04 (2006.01) *F16B 17/00* (2006.01)
F16B 9/02 (2006.01) *E04B 1/19* (2006.01)
F16B 12/24 (2006.01) *E04B 1/38* (2006.01)

(21) International Application Number:

PCT/SG2015/000070

(22) International Filing Date:

10 March 2015 (10.03.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10201400516S 10 March 2014 (10.03.2014) SG

(71) Applicant: **PABENSEN PTE. LTD.** [SG/SG]; NTU Innovation Centre, 18 Nanyang Drive Unit 01-113D, Singapore 637723 (SG).

(72) Inventor: **BENSEN, Peter Arnoud**; 96 Nanyang Crescent #02-13, Singapore 637664 (SG).

(74) Agent: **ENGLISH, Matthew**; Marks & Clerk Singapore LLP, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: DEVICE AND SYSTEM FOR JOINING OBJECTS

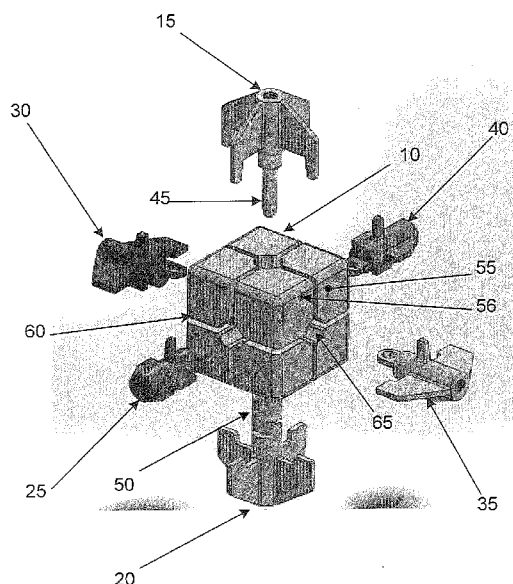


Figure 1A

(57) Abstract: A joint assembly comprising; an engagement block having a plurality of insert receiving faces; each insert receiving face having a slot, and an aperture at a mid-point of said slot; a plurality of inserts each having a core, at least a pair of ribs projecting from said core, a coupling at an insertion end of the core and a mount at a mounting end of the core, and; a coupling pin; wherein said engagement block is arranged to receive the inserts, with said ribs received into the slots and said core received into said aperture, said coupling pin arranged to be inserted into said engagement block and couple with the couplings of said inserts so as to releasably fix the inserts to the engagement block.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))