(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 January 2014 (16.01.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/009823 A1

(51) International Patent Classification:
A61M 39/26 (2006.01) *A61M 39/24* (2006.01)
A61M 39/10 (2006.01)

(21) International Application Number:
PCT/IB2013/054768

(22) International Filing Date:
11 June 2013 (11.06.2013)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
TO2012A000601 9 July 2012 (09.07.2012) IT

(71) Applicant: **INDUSTRIE BORLA S.P.A.** [IT/IT]; Via G. Di Vittorio, 7 bis, I-10024 Moncalieri (Torino) (IT).

(72) Inventor: **GUALA, Gianni**; Strada Villa Zanetti, 28/18, I-10133 Torino (IT).

(74) Agent: **BUZZI, Franco**; Buzzi, Notaro & Antonielli d'Oulx S.r.l., Via Maria Vittoria, 18, I-10123 Torino (IT).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

(54) Title: FLOW SYSTEM FOR MEDICAL LINES

FIG. 3

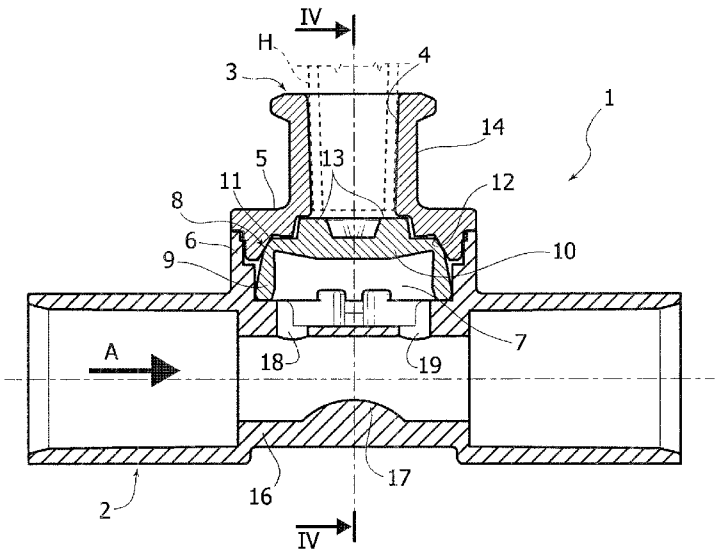

(57) Abstract: A flow system for medical lines comprising a flow component (1) having a main duct (2) and at least one lateral tubular fitting (3) with female luer cone (4) communicating with the main duct (2) through a valve (8), which includes a transverse diaphragm (10) normally kept in fluid-tight contact against an annular valve seat (12) of the lateral tubular fitting (3), which can be moved away from this into an opening position following upon insertion of a male luer-cone introducer of fluid (H) into the lateral tubular fitting (3). The diaphragm (10) is prearranged for being pushed into the opening position directly by the introducer (H), and the lateral tubular fitting (3) is configured in such a way as to couple in a fluid-tight way with the introducer (H) before the latter comes into contact of thrust with the diaphragm (10).

WO 2014/009823 A1