

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/069216 A1

(51) International Patent Classification⁷: **F16S 1/02**, F16B 5/00, E04D 3/362, E04C 2/30, E02D 5/08, E04G 17/00

(74) Agent: **WRAY & ASSOCIATES**; Level 4, The Quadrant, 1 William Street, Perth, Western Australia 6000 (AU).

(21) International Application Number: PCT/AU03/00198

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 14 February 2003 (14.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002100117 14 February 2002 (14.02.2002) AU
2002952080 16 October 2002 (16.10.2002) AU




(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: **ONG, Chin, Chai** [MY/AU]; 32 Winterbell Court, Churchlands, Western Australia 6018 (AU).

[Continued on next page]

(54) Title: CONNECTOR

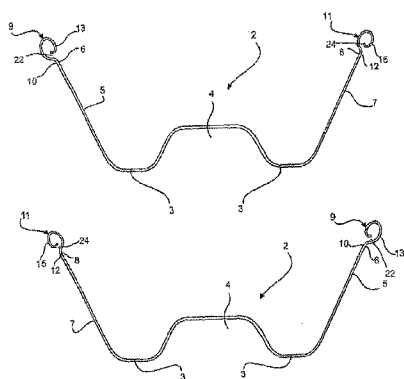

(57) Abstract: A connector (9, 11) having an inner end (8, 10) and an outer end (14, 16), the inner end adapted to be located at an edge (6, 8) of a panel (2) to enable the connector to extend outwardly from the edge, said connector having a curved profile (13, 15) to define a partially enclosed space (18, 20) and having a radial inner face (19, 25) and a radial outer face (21, 27), an opening defined between the inner portion of the connector and the outer portion, said space being configured and dimensioned to longitudinally receive another connector of corresponding form wherein, when a pair of connectors are interengaged: at least a portion of the radial inner face of one connector is able to engage with at least a portion of the radial outer face of the other connector, and at least a portion of the radial inner face of the other connector is able to engage with at least a portion of the radial outer face of the one connector; to prevent disengagement of the connectors throughout a plane transverse to said edge whilst permitting relative longitudinal displacement of the interengaged connectors.



WO 03/069216 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.