



(51) International Patent Classification:
H04L 5/00 (2006.01)

(21) International Application Number:
PCT/US2017/046606

(22) International Filing Date:
11 August 2017 (11.08.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/378,132 22 August 2016 (22.08.2016) US
15/674,325 10 August 2017 (10.08.2017) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
Attn: International IP Administration, 5775 Morehouse Drive,
San Diego, California 92121-1714 (US).

(72) Inventors: **WANG, Renqiu**; 5775 Morehouse Drive, San
Diego, California 92121-1714 (US). **XU, Hao**; 5775 More-


house Drive, San Diego, California 92121-1714 (US).
GAAL, Peter; 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **CHEN, Wanshi**; 5775 Morehouse Drive,
San Diego, California 92121-1714 (US). **JL, Tingfang**; 5775
Morehouse Drive, San Diego, California 92121-1714 (US).
PATEL, Shimman, Arvind; 5775 Morehouse Drive, San Diego,
California 92121-1714 (US). **SMEE, John, Edward**; 5775
Morehouse Drive, San Diego, California 92121-1714 (US).

(74) Agent: **DRAPKIN, Michael, L.**; Holland & Hart LLP, P.O.
Box 11583, Salt Lake City, California 84147 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: UPLINK COMMON BURST SYMBOL CONFIGURATION

FIG. 19

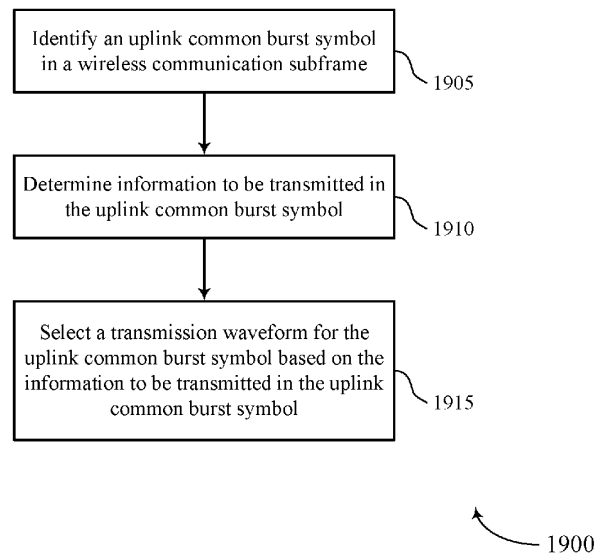

(57) Abstract: Methods, systems, and devices for wireless communication are described that provide for uplink common burst symbol waveform selection and configuration. A waveform for the uplink common burst symbol may be selected to be a single-carrier frequency division multiplexing (SC-FDM) waveform, an orthogonal frequency division multiplexing (OFDM) waveform, or combinations thereof, based at least in part on information that is to be transmitted. A pattern for SC-FDM sequences may be selected to provide enhanced channel estimation through common pilot tones across different sequences, wideband or narrowband sequences may be selected based at least in part on information to be transmitted, and acknowledgment feedback may be transmitted in an end portion of the uplink common burst symbol in some cases to provide additional processing time for determining the acknowledgment feedback.

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))