



(51) International Patent Classification:

B29C 44/18 (2006.01) *F16L 55/175* (2006.01)
B29C 65/42 (2006.01) *F16L 59/18* (2006.01)

(21) International Application Number:

PCT/CA2009/001750

(22) International Filing Date:

9 December 2009 (09.12.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2,647,972 19 December 2008 (19.12.2008) CA

(71) Applicant (for all designated States except US): **SHAW-COR LTD.** [CA/CA]; 25 Bethridge Road, Toronto, Ontario M9W 1M7 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TAILOR, Dilip** [CA/CA]; 525-25 Kingsbridge Garden Circle, Mississauga, Ontario L5R 4B1 (CA). **KLEJMAN, Aaron** [CA/CA]; 415 Jarvis Street, Apt. 315, Toronto, Ontario M4Y 3C1 (CA). **LAFERRIERE, Pascal** [CA/CA]; 124 Beatrice Street, Toronto, Ontario M6J 2T3 (CA). **TRAPMANN, Dieter** [DE/DE]; Leininger Strasse 9, 67125 Dannstadt - Schauernheim (DE).

(74) Agent: **RIDOUT & MAYBEE LLP**; 225 King Street West, 10 th Floor, Toronto, Ontario M5V 3M2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF FILLING A CASING

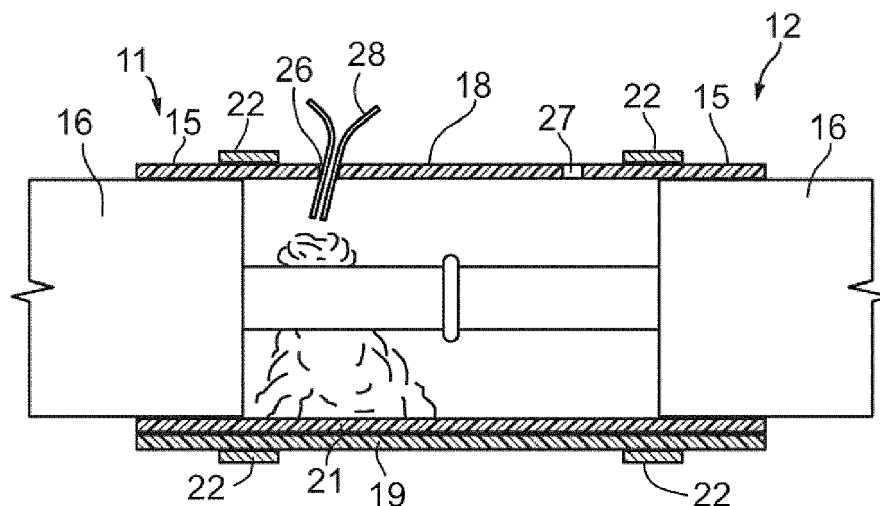


FIG. 6

(57) Abstract: Foam filling a cavity in a joint between insulated pipe lengths by wrapping a fibre reinforced plastic mold sheet around the cavity or applying a casing around the cavity, with a securing element supplied on the mold sheet to resist separating movements of the ends of the mold sheet or one or more flexible tensile members wrapped around the casing, to resist ballooning of the casing on expansion of a foam filling introduced into the mold or into the casing.