

(51) International Patent Classification:
D06F 39/02 (2006.01)(21) International Application Number:
PCT/GB2012/050784(22) International Filing Date:
10 April 2012 (10.04.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/476,011 15 April 2011 (15.04.2011) US
13/370,366 10 February 2012 (10.02.2012) US(71) Applicant (for all designated States except MN, US):
RECKITT BENCKISER N.V. [NL/NL]; Siriusdreef 14,
NL-2132 WT Hoofddorp (NL).(71) Applicant (for MN only): **RECKITT & COLMAN
(OVERSEAS) LIMITED** [GB/GB]; 103-105 Bath Road,
Slough, Berkshire SL1 3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HARTL, Josh**
[US/US]; c/o Ion Design, 115 River Road, Suite 830,
Edgewater, New Jersey 07020 (US). **JOACHIM, Robert**
[US/US]; Ion Design, 115 River Road, Suite 830, Edgewa-
ter, New Jersey 07020 (US). **MADSEN, Steve** [US/US];Ion Design, 115 River Road, Suite 830, Edgewater, New
Jersey 07020 (US). **TURCHI, Mario Alexander** [US/US];
Ion Design, 115 River Road, Suite 830, Edgewater, New
Jersey 07020 (US).(74) Agents: **GILL-CAREY, Michael** et al.; Reckitt Benckiser
Corporate Services Limited, Legal Department - Patents
Group, Dansom Lane, Hull, Yorkshire HU8 7DS (GB).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: DISPENSING DEVICE

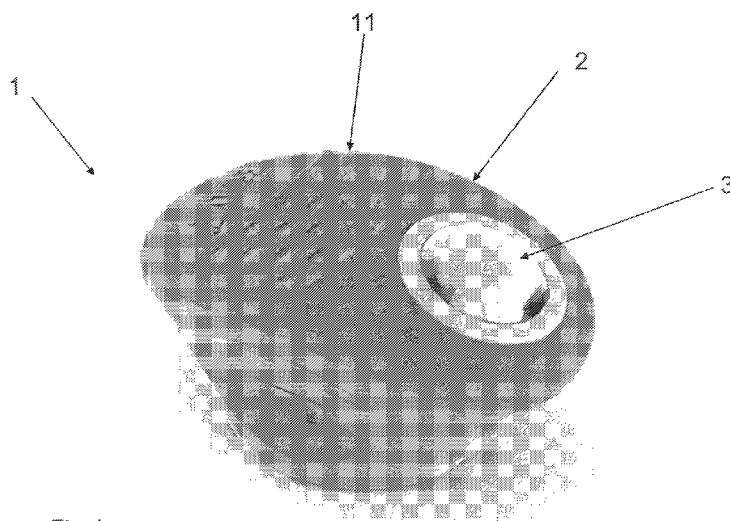


Fig.1

(57) Abstract: A container adapted to con-
tain and dispense a product. Said container
comprises a hollow body, a filling opening, a
dispensing opening,, a valve and a flexible
and resilient support means for said valve.
Said flexible and resilient support means
urges said valve against said dispensing
opening, achieving a leak-tight engagement
between said valve and said dispensing
opening. Said flexible and resilient support
means can be resiliency deformed by an ex-
ternal force acting on said valve whereby
said leak -tight engagement between said
valve and said dispensing opening is disen-
gaged, allowing said contained product to be
spread by said valve. Said flexible and resi-
lient support means comprises a housing
which fits the container and defines said dis-
pensing opening at one extremity. Said hous-
ing comprising a resiliency deformable
means urging said valve against said dis-
pensing opening to achieve said leak-tight
engagement. When the leak-tight engage-
ment between said valve and said dispensing
opening is disengaged a fluid flow pathway
is created which has a cross-section of great-

er than 10% of the width of the dispensing opening.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*