

Description

Title of Invention:

COPPER-NICKEL ALLOY ELECTROPLATING BATH

Technical Field

5 The present invention relates to a copper-nickel alloy electroplating bath. More specifically, the present invention relates to a copper-nickel alloy electroplating bath that is capable of obtaining a plated coating on a workpiece at any alloy ratio of copper and nickel with a uniform composition over a
10 wide current density range and that has an excellent bath stability and is capable of being used continuously for a long period of time.

Background Art

15 Generally, copper-nickel alloys exhibit excellent properties in corrosion resistance, ductility, processability, and high temperature characteristics by changing a ratio of copper and nickel, and also has characteristic properties in electrical resistivity, coefficient of heat resistance,
20 thermal electromotive force, coefficient of thermal expansion, and the like. Thus, studies have hitherto been conducted to obtain such properties of copper-nickel alloys by electroplating. As conventionally attempted copper-nickel alloy electroplating baths, a large variety of baths have been
25 studied, including a cyanide bath, a citric acid bath, an acetic acid bath, a tartaric acid bath, a thiosulfuric acid bath, an ammonia bath, and a pyrophosphoric acid bath; however, none of these baths have been put into practical use. The reasons why the copper-nickel alloy electroplating has not practically been
30 used include: (i) copper and nickel differ from each other in

deposition potential by approximately 0.6 V, so that copper is preferentially deposited; (ii) the plating bath is unstable, so that insoluble compounds such as metal hydroxides are generated; (iii) the plating composition varies due to energization, so that coating having a uniform composition cannot be stably obtained; (iv) the service life of the liquid is short; and the like.

Technical Problems

To solve these problems, an object of the present invention is to provide a copper-nickel alloy electroplating bath:

- (1) that is capable of depositing copper and nickel on a workpiece at any alloy ratio of copper and nickel;
- (2) that is also capable of obtaining a plated coating with a uniform composition over a wide current density range;
- (3) that has an excellent bath stability; and
- (4) that is capable of being used for a long period of time.

As a result of earnest studies, the present inventors have found that the above object can be achieved by using a copper-nickel alloy electroplating bath comprising: (a) a copper salt and a nickel salt; (b) a metal complexing agent; (c) a conductivity providing salt; and (d) a sulfur-containing organic compound, and comprising (e) an oxidation-reduction potential adjusting agent, as a copper-nickel alloy electroplating bath, adjusting the oxidation-reduction potential (hereinafter sometimes referred to as ORP) of the copper-nickel alloy electroplating bath such that the ORP is constantly maintained to be equal to or higher than 20 mV (reference electrode Ag/AgCl) during plating operation, and also adjusting the ORP of the plating bath such that the ORP

is constantly equal to or higher than 20 mV (reference electrode Ag/AgCl) even when energization (electrolysis) is conducted between a cathode (a workpiece) and an anode. In other words, the present invention provides a copper-nickel alloy electroplating bath comprising: (a) a copper salt and a nickel salt; (b) a metal complexing agent; (c) a conductivity providing salt; (d) a sulfur-containing organic compound; and (e) an oxidation-reduction potential adjusting agent.

According to the present invention, it is possible to provide a copper-nickel alloy electroplating bath:

- (1) that is capable of depositing copper and nickel on a workpiece at any alloy ratio of copper and nickel;
- (2) that is also capable of obtaining a plated coating with a uniform composition over a wide current density range;
- (3) that has an excellent bath stability; and
- (4) that is capable of being used for a long period of time.

Description of Embodiments

A copper-nickel alloy electroplating bath of the present invention comprises: (a) a copper salt and a nickel salt; (b) a metal complexing agent; (c) a conductivity providing salt; (d) a sulfur-containing organic compound; and (e) an oxidation-reduction potential adjusting agent.

(a) Copper Salt And Nickel Salt

The copper salt includes, but is not limited to, copper sulfate, copper(II) halides, copper sulfamate, copper methanesulfonate, copper(II) acetate, basic copper carbonate, and the like. These copper salts may be used alone, or may be used as a mixture of two or more thereof. The nickel salt includes, but is not limited to, nickel sulfate, nickel halides, basic nickel carbonate, nickel sulfamate, nickel acetate,

nickel methanesulfonate, and the like. These nickel salts may be used alone, or may be used as a mixture of two or more thereof. The concentrations of the copper salt and the nickel salt in the plating bath have to be selected in various manners in accordance with the composition of a plated coating to be desired. However, the concentration of copper ions is preferably 0.5 to 40 g/L, and more preferably 2 to 30 g/L, and the concentration of nickel ions is preferably 0.25 to 80 g/L, and more preferably 0.5 to 50 g/L. In addition, the total concentration of copper ions and nickel ions in the plating bath is preferably 0.0125 to 2 mol/L, and more preferably 0.04 to 1.25 mol/L.

(b) Metal Complexing Agent

The metal complexing agent stabilizes metals, which are copper and nickel. The metal complexing agent includes, but is not limited to, monocarboxylic acids, dicarboxylic acids, polycarboxylic acids, oxycarboxylic acids, keto-carboxylic acids, amino acids, and amino carboxylic acids, as well as salts thereof, and the like. Specifically, the metal complexing agent includes malonic acid, maleic acid, succinic acid, tricarballic acid, citric acid, tartaric acid, malic acid, gluconic acid, 2-sulfoethylimino-N,N-diacetic acid, iminodiacetic acid, nitrilotriacetic acid, EDTA, triethylenediaminetetraacetic acid, hydroxyethyliminodiacetic acid, glutamic acid, aspartic acid, β -alanine-N,N-diacetic acid, and the like. Among these, malonic acid, citric acid, malic acid, gluconic acid, EDTA, nitrilotriacetic acid, and glutamic acid are preferable. In addition, the salts of these carboxylic acids include, but are not limited to, magnesium salts, sodium salts, potassium salts,

ammonium salts, and the like. These metal complexing agents may be used alone, or may be used as a mixture of two or more thereof. The concentration of the metal complexing agent in the plating bath is preferably 0.6 to 2 times, and more
5 preferably 0.7 to 1.5 times, the metal ion concentration (molar concentration) in the bath.

(c) Conductivity Providing Salt

The conductivity providing salt provides electrical conductivity to the copper-nickel alloy electroplating bath.
10 In the present invention, the conductivity providing salt includes inorganic halide salts, inorganic sulfates, lower alkane (preferably C1 to C4) sulfonates, and alkanol (preferably C1 to C4) sulfonates.

The inorganic halide salts include, but are not limited
15 to, chloride salts, bromide salts, and iodized salts of magnesium, sodium, potassium, and ammonium, and the like. These inorganic halide salts may be used alone, or may be used as a mixture of two or more thereof. The concentration of the inorganic halide salt in the plating bath is preferably 0.1 to
20 2 mol/L, and more preferably 0.2 to 1 mol/L.

The inorganic sulfates include, but are not limited to, magnesium sulfate, sodium sulfate, potassium sulfate, ammonium sulfate, and the like. These inorganic sulfates may be used alone, or may be used as a mixture of two or more thereof.

25 The lower alkane sulfonates and the alkanol sulfonates include, but are not limited to, magnesium salts, sodium salts, potassium salts, ammonium salts, and the like, and more specifically include magnesium, sodium, potassium, and ammonium salts of methanesulfonic acid and
30 2-hydroxypropanesulfonic acid, and the like. These sulfonates

may be used alone, or may be used as a mixture of two or more thereof.


The concentration of the sulfate and/or the sulfonate in the plating bath is preferably 0.25 to 1.5 mol/L, and more
5 preferably 0.5 to 1.25 mol/L.

Moreover, it is more effective to use a plurality of conductivity providing salts different from each other as the conductivity providing salt. It is preferable to comprise an inorganic halide salt and a salt selected from the group
10 consisting of inorganic sulfates and the sulfonates, as the conductivity providing salt.

(d) Sulfur-containing Organic Compound

The sulfur-containing organic compound preferably includes a compound selected from the group consisting of
15 disulfide compounds, sulfur-containing amino acids, benzothiazolylthio compounds, and salts thereof.

The disulfide compound includes, but is not limited to, disulfide compounds represented by the general formula (I), and the like:



wherein R^1 and R^2 represent hydrocarbon groups, A represents a SO_3Na group, a SO_3H group, an OH group, a NH_2 group, or a NO_2 group.

In the formula, the hydrocarbon group is preferably an
25 alkylene group, and more preferably an alkylene group having 1 to 6 carbon atoms. Specific examples of the disulfide compounds include, but are not limited to, bis-sodium sulfoethyl disulfide, bis-sodium sulfopropyl disulfide, bis-sodium sulfopentyl disulfide, bis-sodium sulfohexyl
30 disulfide, bis-sulfoethyl disulfide, bis-sulfopropyl

disulfide, bis-sulfopentyl disulfide, bis-aminoethyl
 disulfide, bis-aminopropyl disulfide, bis-aminobutyl
 disulfide, bis-aminopentyl disulfide, bis-hydroxyethyl
 disulfide, bis-hydroxypropyl disulfide, bis-hydroxybutyl
 5 disulfide, bis-hydroxypentyl disulfide, bis-nitroethyl
 disulfide, bis-nitropropyl disulfide, bis-nitrobutyl
 disulfide, sodium sulfoethyl propyl disulfide, sulfobutyl
 propyl disulfide, and the like. Among these disulfide
 compounds, bis-sodium sulfopropyl disulfide, bis-sodium
 10 sulfobutyl disulfide, and bis-aminopropyl disulfide are
 preferable.


The sulfur-containing amino acids include, but are not
 limited to, sulfur-containing amino acids represented by the
 general formula (II), and the like:

15 $R-S-(CH_2)_nCHNHCOOH$ (II)

wherein R represents a hydrocarbon group, or -H or
 $-(CH_2)_nCHNHCOOH$, and each n is independently 1 to 50.

In the formula, the hydrocarbon group is preferably an
 alkyl group, and more preferably an alkyl group having 1 to 6
 20 carbon atoms. Specific examples of the sulfur-containing
 amino acids include, but are not limited to, methionine, cystine,
 cysteine, ethionine, cystine disulfoxide, cystathionine, and
 the like.

The benzothiazolylthio compounds include, but are not
 25 limited to, benzothiazolyl compounds represented by the general
 formula (III), and the like:

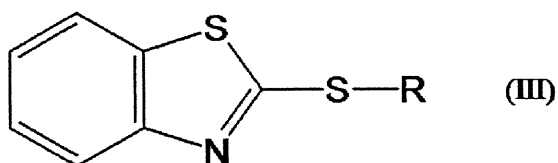

wherein R represents a hydrocarbon group, or -H or

$-(\text{CH}_2)_n\text{COOH}$.

In the formula, the hydrocarbon group is preferably an alkyl group, and more preferably an alkyl group having 1 to 6 carbon atoms. In addition, $n = 1$ to 5. Specific examples of the benzothiazolylthio compounds include, but are not limited to, (2-benzothiazolyl thio)acetic acid, 3-(2-benzothiazolyl thio)propionic acid, and the like. In addition, the salts thereof include, but are not limited to, sulfate, halide salt, methanesulfonate, sulfamate, acetate, and the like.

These disulfide compounds, sulfur-containing amino acids, and benzothiazolylthio compounds as well as the salts thereof may be used alone, or may be used as a mixture of two or more thereof. The concentration of a compound selected from the group consisting of disulfide compounds, sulfur-containing amino acids, and benzothiazolylthio compounds as well as the salts thereof in the plating bath is preferably 0.01 to 10 g/L, and more preferably 0.05 to 5 g/L.

In addition, it is more effective to use a compound selected from the group consisting of disulfide compounds, sulfur-containing amino acids, and benzothiazolylthio compounds as well as salts thereof, and a compound selected from the group consisting of sulfonic acid compounds, sulfimide compounds, sulfamic acid compounds, and sulfonamides as well as salts thereof in combination as the sulfur-containing organic compound. The use of a compound selected from the group consisting of sulfonic acid compounds, sulfimide compounds, sulfamic acid compounds, and sulfonamides as well as salts thereof in combination makes the copper-nickel alloy electroplated coating dense.

The sulfonic acid compounds and salts thereof include,

but are not limited to, aromatic sulfonic acids, alkene sulfonic acids, and alkyne sulfonic acid as well as salts thereof. Specifically, the sulfonic acid compounds and salts thereof include, but are not limited to, sodium
5 1,5-naphthalenedisulfonate, sodium
1,3,6-naphthalenetrisulfonate, sodium 2-propene-1-sulfonate and the like.

The sulfimide compounds and salts thereof include, but are not limited to, benzoic sulfimide (saccharin) and salts
10 thereof, and the like. Specifically, the sulfimide compounds and salts include, but are not limited to, saccharin sodium and the like.

The sulfamic acid compounds and salts thereof include, but are not limited to, acesulfame potassium, sodium
15 N-cyclohexylsulfamate, and the like.

The sulfonamides and salts thereof include, but are not limited to, para-toluene sulfonamide and the like.

These sulfonic acid compounds, sulfimide compounds, sulfamic acid compounds, and sulfonamides as well as salts
20 thereof may be used alone, or may be used as a mixture of two or more thereof. The concentration of a compound selected from the group consisting of sulfonic acid compounds, sulfimide compounds, sulfamic acid compounds, and sulfonamides as well as salts thereof in the plating bath is preferably 0.2 to 5 g/L,
25 and more preferably 0.4 to 4 g/L.

(e) ORP Adjusting Agent

The oxidation-reduction potential adjusting agent is preferably an oxidant, and is, for example, an inorganic or organic oxidant. Such an oxidant includes, for example,
30 hydrogen peroxide solutions, and water-soluble oxoacids, as

well as salts thereof. The water-soluble oxoacids and salts thereof include inorganic and organic oxoacids.

When electroplating is performed by energizing between the cathode (workpiece) and the anode, divalent copper ions are deposited as metallic copper on the cathode by reduction reaction, and subsequently, the deposited metallic copper generates monovalent copper ions by dissolution reaction and the like. Then, the generation of such monovalent copper ions lowers the oxidation-reduction potential of the plating bath. The ORP adjusting agent is assumed to act as an oxidant for monovalent copper ions, which oxidizes monovalent copper ions to divalent copper ions, preventing the oxidation-reduction potential of the plating bath from being lowered.

Preferable inorganic oxoacids include halogen oxoacids such as hypochlorous acid, chlorous acid, chloric acid, perchloric acid, and bromic acid, and alkali metal salts thereof, nitric acid and alkali metal salts thereof, as well as persulfuric acid and alkali metal salts thereof.

Preferable organic oxoacids and salts thereof include aromatic sulfonates such as sodium 3-nitrobenzenesulfonate and percarboxylates such as sodium peracetate.

In addition, water-soluble inorganic compounds and organic compounds that are used also as pH buffers, as well as alkali metal salts thereof can also be used as the ORP adjusting agent. Such ORP adjusting agents include, preferably boric acid, phosphoric acid, and carbonic acid as well as alkali metal salts thereof, and the like, and also carboxylic acids such as formic acid, acetic acid, and succinic acid as well as alkali metal salts thereof, and the like.

Such ORP adjusting agents may be used alone, or may be

used as a mixture of two or more thereof. When the ORP adjusting agent is an oxidant, the amount of the oxidant to be added is normally in a range of 0.01 to 5 g/L, and preferably in a range of 0.05 to 2 g/L. When the ORP adjusting agent is a pH buffer,
5 the amount of the pH buffer to be added is normally in a range of 2 to 60 g/L, and preferably in a range of 5 to 40 g/L.

In the present invention, the oxidation-reduction potential (ORP) in the copper-nickel alloy electroplating bath needs to be constantly maintained at 20 mV (reference electrode
10 (vs.) Ag/AgCl) or higher at a plating bath temperature, during plating operation. When the plating is being performed (during energizing), the oxidation-reduction potential normally decreases with time. In such case as well, the oxidation-reduction potential adjusting agent may
15 additionally be added and used as appropriate to constantly maintain the oxidation-reduction potential (ORP) at 20 mV (vs. Ag/AgCl) or higher.

If the oxidation-reduction potential (ORP) in the bath becomes lower than or equal to 20 mV (vs. Ag/AgCl), deposition
20 of plating becomes coarse, resulting in the formation of an uneven surface. Although there is no upper limit in the oxidation-reduction potential (ORP) in the bath, the ORP that is higher than or equal to 350 mV (vs. Ag/AgCl) is not favorable because such a high ORP affects organic substances contained
25 in the bath, that is, (b) the metal complexing agent, (d) the sulfur-containing organic compound, and the like, thus lowering their effects, in some cases.

In the present invention, adding the surfactant to the copper-nickel alloy electroplating bath improves the
30 uniformity of the plating composition and the smoothness of the

plated surface. The surfactant includes water-soluble surfactants having a polymerizable group of an ethylene oxide or a propylene oxide, or a copolymerizable group of an ethylene oxide and a propylene oxide, as well as water-soluble synthetic
5 polymers.

As the water-soluble surfactants, any of anionic surfactants, cationic surfactants, amphoteric surfactants, and nonionic surfactants may be used regardless of the ionicity, but nonionic surfactants are preferable. Although the
10 water-soluble surfactants have a polymerizable group of an ethylene oxide or a propylene oxide, or a copolymerizable group of an ethylene oxide and a propylene oxide, the polymerization degree of these is 5 to 250, and preferably 10 to 150. These water-soluble surfactants may be used alone, or may be used as
15 a mixture of two or more thereof. The concentration of the water-soluble surfactant in the plating bath is preferably 0.05 to 5 g/L, and more preferably 0.1 to 2 g/L.

The water-soluble synthetic polymers include reaction products of glycidyl ethers and polyvalent alcohols. The
20 reaction products of glycidyl ethers and polyvalent alcohols make the copper-nickel alloy electroplated coating dense and further are effective in making the plating composition uniform.

The glycidyl ethers, which are reaction raw materials of
25 the reaction products of glycidyl ethers and polyvalent alcohols, include, but are not limited to, glycidyl ethers containing two or more epoxy groups in molecule, glycidyl ethers containing one or more hydroxyl groups and one or more epoxy groups in molecule, and the like. Specifically, the glycidyl
30 ethers include glycidol, glycerol polyglycidyl ether, ethylene

glycol diglycidyl ether, polyethylene glycol diglycidyl ether, polypropylene glycol diglycidyl ether, sorbitol polyglycidyl ether, and the like.

5 The polyvalent alcohols include, but are not limited to, ethylene glycol, propylene glycol, glycerin, polyglycerin, and the like.

The reaction product of a glycidyl ether and a polyvalent alcohol is preferably a water-soluble polymer that is obtained by condensation reaction between an epoxy group of the glycidyl
10 ether and a hydroxyl group of the polyvalent alcohol.

These reaction products of glycidyl ethers and polyvalent alcohols may be used alone, or may be used as a mixture of two or more thereof. The concentration of the reaction product of a glycidyl ether and a polyvalent alcohol in the plating bath
15 is preferably 0.05 to 5 g/L, and more preferably 0.1 to 2 g/L.

In the present invention, although there is no particular limit in the pH of the copper-nickel alloy electroplating bath, the pH of the copper-nickel alloy electroplating bath is normally in a range of 1 to 13, and preferably in a range of
20 3 to 8. The pH of the plating bath may be adjusted by using a pH modifier such as sulfuric acid, hydrochloric acid, hydrobromic acid, methanesulfonic acid, sodium hydroxide, potassium hydroxide, ammonia water, ethylenediamine, diethylenetriamine, triethylenetetramine. When the plating
25 operation is being performed, it is preferable to maintain the pH of the plating bath at a constant level by using the pH modifier.

Next, a plating method using the plating bath of the present invention will be described. Workpieces that can be
30 electroplated by using the plating bath of the present invention

include copper, iron, nickel, silver, gold, and alloys thereof, and the like. In addition, substrates having surfaces modified with the metal or alloy may be used as the workpiece. Such substrates include glass substrate, ceramic substrate, plastic
5 substrate, and the like.

When electroplating is performed, insoluble anodes of carbon, platinum, platinum-plated titanium, indium oxide-coated titanium, and the like may be used as the anode. Alternatively, soluble anodes using copper, nickel,
10 copper-nickel alloy, or both copper and nickel together, and the like may be used.

Moreover, in the electroplating method using the copper-nickel alloy electroplating bath of the present invention, it is preferable to use a plating tank in which the
15 substrate to be plated (cathode) and the anode electrode are separated by a membrane in the plating tank. The membrane is preferably a neutral membrane or an ion-exchange membrane. The neutral membranes include one having a substrate of polyethylene terephthalate resin with a membrane material of
20 poly vinylidene difluoride resin titanium oxide/sucrose fatty acid ester. In addition, as the ion-exchange membrane, a cation-exchange membrane is suitable.

Although the copper-nickel alloy electroplating bath of the present invention allows a plated coating of a desired
25 composition with a copper/nickel composition ratio of the metal coating to be deposited being 5/95 to 99/1 to be obtained, the copper/nickel composition ratio is preferably 20/80 to 98/2, and more preferably 50/50 to 95/5.

When plating is performed, the workpiece is brought to
30 the plating step after being pre-treated by a conventional

method. In the pre-treatment step, at least one operation of soak cleaning, electrolytic cleaning of the cathode or the anode, acid pickling, and activation is performed. Water cleaning is performed between every successive operations. After the plating, the coating thus obtained may be cleaned with water or hot water, and then dried. In addition, after the plating of a copper-nickel alloy, an anti-oxidation treatment or the plating of tin or a tin alloy, or the like may be performed. In the present invention, the plating bath is capable of being used for a long period of time without liquid updating, by maintaining the bath components at a constant level with an appropriate replenishing agent.

When electroplating is performed by using the copper-nickel alloy electroplating bath of the present invention, direct current or pulsed current may be used as the plating current onto the substrate to be plated and the anode electrode in the copper-nickel alloy electroplating bath.

The cathode current density is normally 0.01 to 10 A/dm^2 , and preferably 0.1 to 8.0 A/dm^2 .

The plating time is normally in a range of 1 to 1200 minutes, and preferably in a range of 15 to 800 minutes although it also depends on the film thickness of plating to be required, and the current condition.

The bath temperature is normally 15 to 70°C , and preferably 20 to 60°C . The bath may be stirred by air or liquid flow, or mechanical liquid stirring using a cathode rocker, a paddle, and the like. The film thickness may be set in a wide range, but is generally 0.5 to $100 \text{ }\mu\text{m}$, and preferably 3 to $50 \text{ }\mu\text{m}$.

Next, the present invention will be described with

Examples, but the present invention is not limited to these Examples. The compositions of the plating bath and the plating conditions may be changed as desired along with the concepts of the above-described object for obtaining copper-nickel alloy plating that is capable of obtaining a plated coating on a workpiece at any alloy ratio of copper and nickel with a uniform composition over a wide current density range and that has an excellent bath stability and is capable of being used continuously for a long period of time.

10 EXAMPLES

Plating in Examples was evaluated by using a test piece formed by sealing one surface of an iron plate (SPCC) of 0.5 × 65 × 100 mm with a Teflon (Registered Trademark) tape. The iron plate as the test piece was degreased using 50 g/L Dasshi-39 (manufactured by Dipsol Chemicals Co., Ltd.), and was cleaned with 10.5% by weight hydrochloric acid, followed by electrolysis cleaning with 5 % by weight NC-20 (manufactured by Dipsol Chemicals Co., Ltd.) and a solution of 7 g/L sodium hydroxide. After the electrolysis cleaning, the test piece was then activated with 3.5% hydrochloric acid. Water cleaning was sufficiently performed between every successive operations. Further, the test piece was subjected to copper strike plating with the cyanide bath to obtain 0.3 μm of deposition.

In addition, the method of measuring the oxidation-reduction potential (ORP) of the plating liquid was such that the oxidation-reduction potential (ORP) was measured by using a portable ORP meter (manufactured by Horiba, Ltd.; a portable ORP meter D-72, reference electrode Ag/AgCl) at a bath temperature (normally 15°C to 70°C) during plating operation, and by dipping the electrodes of the ORP meter in

the plating liquid and reading a numerical value (mV).

(Examples 1 to 9 and Comparative Examples 1 to 6)

Next, plating liquids shown in Table-1 were poured into a plating tank made of acrylic resin, a copper plate was used
5 as the anode, the above-described test piece was connected to the cathode and was plated under conditions shown in Table-2. Results of evaluations of the film thickness, alloy composition, plated surface state, and plating external appearance (including color tone, smoothness, and glossiness) of obtained
10 plating are shown in Table-3 and Table-4.

Note that, the film thickness of the copper strike plating is incomparably smaller than the film thickness of the copper-nickel alloy electroplating, and is such a level that the influence on the film thickness and the alloy composition
15 of the copper-nickel alloy electroplating is negligible.

Moreover, the film thickness, the alloy composition, the plated surface state, and the plating external appearance of the plating were evaluated as follows:

(1) The film thickness of the plating was measured using an X-ray
20 fluorescence spectrometer.

(2) The alloy composition of the plating was evaluated by measuring the alloy composition of the plating section using an energy-dispersive X-ray spectrometer, and evaluating the uniformity of the plated coating.

25 (3) The plated surface state (smoothness) was observed and evaluated using a scanning electron microscope.

(4) The external appearance (color tone) of the plating was visually observed.

Regarding Comparative Examples as well, plating was
30 conducted using plating liquids of compositions shown in

Table-5 under conditions shown in Table-6 in the same manner as that in Examples. Results of evaluations of the film thickness, alloy composition, plated surface state, and plating external appearance of the obtained plating are shown in

5 Table-7.

[Table 1]

Table-1 - Compositions of Plating Liquids of Examples 1 to 9

Concentrations of Components	Examples								
	1	2	3	4	5	6	7	8	9
(a) Cu^{2+} (g/L)	5	5	5	10	10	10	15	15	15
(a) Ni^{2+} (g/L)	10	5	2	15	10	5	25	15	5
Concentration of Metals (mol/L) ($\text{Cu}^{2+} + \text{Ni}^{2+}$)	0.25	0.16	0.11	0.41	0.33	0.24	0.66	0.49	0.32
(b) Malonic Acid (mol/L)	0.38	-	-	0.62	-	-	0.99	-	-
(b) Citric Acid (mol/L)	-	-	0.08	-	-	0.24	-	-	0.22
(b) Nitritotriacetic Acid (mol/L)	-	0.16	-	-	0.23	-	-	0.49	-
Metal Complexing Agent/Metal Molar Concentration Ratio (Fold)	1.5	1.0	0.7	1.5	0.7	1.0	1.5	1.0	0.7
(c) Sodium Chloride (mol/L)	0.2	0.5	-	-	0.25	-	1.0	0.5	-
(c) Potassium Bromide (mol/L)	-	-	0.25	1.0	-	0.2	-	-	0.25
(c) Magnesium Sulfate (mol/L)	-	1.0	-	-	-	0.5	-	-	0.75
(c) Sodium Methanesulfonate (mol/L)	-	-	-	-	1.25	-	-	0.5	-
(d) Bis-sodium Sulfopropyl Disulfide (g/L)	0.05	-	0.1	-	-	0.1	4.0	-	0.5
(d) Cysteine Methanesulfonate (g/L)	-	0.2	-	0.2	2.0	-	-	1.0	-

(d) Sodium 1,5-naphthalenedisulfonate (g/L)	-	-	2.0	-	-	-	4.0	-	-
(d) Saccharin Sodium (g/L)	-	0.4	-	-	2.0	-	-	-	1.0
(e) 35%-Hydrogen Peroxide Solution (g/L)	-	0.05	-	-	1.0	-	-	2.0	-
(e) Peroxyacetic Acid (g/L)	-	-	-	0.5	-	-	-	-	-
(e) Boric Acid (g/L)	40	-	-	20	-	40	30	-	-
(e) Succinic Acid (g/L)	-	-	20	-	10	-	-	-	40
Reaction Product of Ethylene Glycol Diglycidyl Ether and Propylene Glycol (g/L)	-	0.1	-	-	-	-	-	2.0	-
Reaction Product of Glycerol Polyglycidyl Ether and Polyglycerin (g/L)	-	-	-	0.5	-	-	0.2	-	-
Polyethylene Glycol (g/L)	-	-	-	-	-	1.0	-	-	-
pH	4	5	6	4	5	6	3	8	6
ORP Before Plating Energization (mV)	300	234	256	320	320	176	260	210	176

Types of Copper Salts: copper(II) sulfamate (Examples 1 and 7), copper(II) sulfate (Examples 2, 6 and 9), copper(II) acetate (Examples 3 and 4), copper(II) methanesulfonate (Examples 5 and 8)

Types of Nickel Salts: nickel sulfamate (Examples 1 and 7), nickel sulfate (Examples 2, 6, and 9), nickel acetate (Examples 3 and 4), nickel methanesulfonate (Examples 5 and 8)

pH Modifiers: sodium hydroxide (Examples 1, 2, 5, 7, and 8), potassium hydroxide (Examples 3,

4, 6, and 9)

[Table 2]

Table-2 - Plating Conditions of Examples 1 to 9

Items		Plating Conditions				
		Cathode Current Density at Direct Current Portion or Peak Portion (A/dm ²)	Current Type	Plating Time (min)	Bath Temperature (°C)	With/Without Stirring
Examples	1	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		15		
	2	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		15		
	3	0.5	Direct Current	200	65	With Stirring
		5.0		25		
		10		15		
	4	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		15		
	5	0.5	Pulse	400	65	With Stirring
		5.0	Duty	40		
		10	Ratio: 0.5	25		
	6	0.5	Direct	200	50	With

		5.0	Current	25		Stirring
		10		15		
	7	0.5	Direct Current	200	40	With Stirring
		5.0		25		
		10		12.5		
	8	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		12.5		
	9	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		12.5		

[Table 3]

Table-3 - Results Obtained in Examples 1 to 5

Obtained Results												
		First Plated Coating • ORP During Plating					Fifth Plated Coating • ORP During Plating					
		Plating Film Thickness μm	Plating Composition Cu%	Appearance and Color Tone	Smoothness and Glossiness of Surface	ORP mV Vs. Ag/A gCl	Plating Film Thickness μm	Plating Composition Cu%	Appearance and Color Tone	Smoothness and Glossiness of Surface	ORP mV Vs. Ag/A gCl	
Items		Plating Film Thickness μm	Plating Composition Cu%	Appearance and Color Tone	Smoothness and Glossiness of Surface	ORP mV Vs. Ag/A gCl	Plating Film Thickness μm	Plating Composition Cu%	Appearance and Color Tone	Smoothness and Glossiness of Surface	ORP mV Vs. Ag/A gCl	Bath Stability (After Left to Stand for 7 Days at Room Temperature)
	Examp les	1	20	45	Silver White	Semi-g lossy	>100	20	47	Silver White	Semi-g lossy	>100

[Table 5]

Table-5 - Compositions of Plating Liquids of Comparative Examples 1 to 6

Concentrations of Components	Comparative Examples					
	1	2	3	4	5	6
(a) Cu^{2+} (g/L)	5	10	10	15	15	15
(a) Ni^{2+} (g/L)	10	10	5	25	15	5
Concentration of Metals (mol/L) ($\text{Cu}^{2+} + \text{Ni}^{2+}$)	0.25	0.33	0.24	0.66	0.49	0.32
(b) Malonic Acid (mol/L)	0.38	-	-	0.99	-	-
(b) Citric Acid (mol/L)	-	-	0.24	-	-	0.22
(b) Nitrilotriacetic Acid (mol/L)	-	0.23	-	-	0.49	-
Metal Complexing Agent/Metal Molar Concentration Ratio (Fold)	1.5	0.7	1.0	1.5	1.0	0.7
(c) Sodium Chloride (mol/L)	0.2	0.25	-	1.0	0.5	-
(c) Potassium Bromide (mol/L)	-	-	0.2	-	-	0.25
(c) Magnesium Sulfate (mol/L)	-	-	0.5	-	-	0.75

(c) Sodium Methanesulfonate (mol/L)	-	1.25	-	-	0.5	-
(d) Bis-sodium Sulfopropyl Disulfide (g/L)	0.05	-	0.1	4.0	-	0.5
(d) Cysteine Methanesulfonate (g/L)	-	2.0	-	-	1.0	-
(d) Sodium 1,5-naphthalenedi sulfonate (g/L)	-	-	-	4.0	-	-
(d) Saccharin Sodium (g/L)	-	2.0	-	-	-	1.0
(e) 35%-Hydrogen Peroxide Solution (g/L)	-	-	-	-	-	-
(e) Peroxyacetic Acid (g/L)	-	-	-	-	-	-
(e) Boric Acid (g/L)	-	-	-	-	-	-
(e) Succinic Acid (g/L)	-	-	-	-	-	-
Reaction Product of Ethylene Glycol Diglycidyl Ether and Propylene Glycol (g/L)	-	-	-	-	2.0	-

Reaction Product of Glycerol						
Polyglycidyl Ether and Polyglycerin (g/L)	-	-	-	0.2	-	-
Polyethylene Glycol (g/L)	-	-	1.0	-	-	-
pH	4	5	6	3	8	6
ORP Before Plating Energization (mV)	300	280	176	260	140	176

Types of Copper Salts: copper(II) sulfamate (Comparative Examples 1 and 4), copper(II) sulfate (Comparative Examples 3 and 6), copper(II) methanesulfonate (Comparative Examples 2 and 5)

- 5 Types of Nickel Salts: nickel sulfamate (Comparative Examples 1 and 4), nickel sulfate (Comparative Examples 3 and 6), nickel methanesulfonate (Comparative Examples 2 and 5)

pH modifiers: sodium hydroxide (Comparative Examples 1, 2, 4, and 5), potassium hydroxide (Comparative Examples 3 and 6)

10 [Table 6]

Table-6 - Plating Conditions of Comparative Examples 1 to 6

Items	Plating Conditions				
	Cathode Current Density at Direct Current Portion	Current Type	Plating Time (min)	Bath Temperature (°C)	With/Without Stirring

		or Peak Portion (A/dm ²)				
Comparative Examples	1	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		15		
	2	0.5	Pulse Duty Ratio: 0.5	400	65	With Stirring
		5.0		40		
		10		25		
	3	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		15		
	4	0.5	Direct Current	200	40	With Stirring
		5.0		25		
		10		12.5		
	5	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		12.5		
	6	0.5	Direct Current	200	50	With Stirring
		5.0		25		
		10		12.5		

[Table 7]

Table-7 - Results Obtained in Comparative Examples 1 to 6

		Obtained Results					
		First Plated Coating • ORP During Plating			Fifth Plated Coating • ORP During Plating		
Items		Plating Film Thickness μm	Plating Composition Cu%	Appearance and Color Tone	Smoothness and Glossiness of Surface	ORP mV Vs. Ag/AgCl	Bath Stability (After Left to Stand for 7 Days at Room Temperature)
	Comparative	20	49	Silver White	Semi-glossy	Without	No Turbid

3	20	88	cupron ickel	Semi-g lossy Smooth	Without t Prepar ation >40	20	100	Copper y	Not Glossy Coarse Deposi tion	Without t Prepar ation <10	No Turbid ity
	20	88	cupron ickel	Semi-g lossy Smooth		20	98	Copper y	Not Glossy Coarse Deposi tion		
	20	91	cupron ickel	Semi-g lossy Smooth		20	95	cupron ickel	Semi-g lossy Smooth		
4	20	47	Silver White	Semi-g lossy Smooth	Without t Prepar ation >20	20	98	Copper y	Not Glossy Coarse Deposi tion	Without t Prepar ation <10	No Turbid ity

Claims

Claim 1

A copper-nickel alloy electroplating bath comprising:

- (a) a copper salt and a nickel salt;
- 5 (b) a metal complexing agent;
- (c) a conductivity providing salt;
- (d) a sulfur-containing organic compound; and
- (e) an oxidation-reduction potential adjusting agent.

Claim 2

- 10 The copper-nickel alloy electroplating bath according to claim 1, wherein

(e) the oxidation-reduction potential adjusting agent is selected from the group consisting of an oxidant, a pH buffer, and a combination thereof.

15 Claim 3

The copper-nickel alloy electroplating bath according to claim 2, wherein

- the oxidant is selected from the group consisting of hydrogen peroxide solutions, water-soluble oxoacids, and salts
20 thereof.

Claim 4

The copper-nickel alloy electroplating bath according to any one of claims 1 to 3, wherein

- an oxidation-reduction potential (ORP) of the plating
25 bath during plating operation (during energization) is higher than or equal to 20 mV (reference electrode Ag/AgCl).

Claim 5

The copper-nickel alloy electroplating bath according to claim 4, wherein

- 30 the oxidation-reduction potential higher than or equal

to 20 mV (reference electrode Ag/AgCl) is obtained by adjustment using the oxidation-reduction potential adjusting agent.

Claim 6

The copper-nickel alloy electroplating bath according to
5 any one of claims 1 to 5, wherein

a copper/nickel composition ratio of a copper-nickel alloy electroplated coating is 5/95 to 95/5.

Claim 7

The copper-nickel alloy electroplating bath according to
10 any one of claim 1 to 6, wherein

the copper-nickel alloy electroplating bath is used to plate a substrate of a metal selected from the group consisting of copper, iron, nickel, silver, gold, and alloys thereof, or a substrate having a substrate surface modified with the metal
15 or alloy.