

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
24 July 2025 (24.07.2025)



(10) International Publication Number
WO 2025/153923 A1

(51) International Patent Classification:

A61L 9/12 (2006.01) H05B 46/00 (2020.01)
A61L 9/14 (2006.01)

(21) International Application Number:

PCT/IB2025/050226

(22) International Filing Date:

09 January 2025 (09.01.2025)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

202441002843 15 January 2024 (15.01.2024) IN

(71) Applicant: N. RANGA RAO & SONS PRIVATE
LIMITED [IN/IN]; 1553, Vanivilas Road, Karnataka,
Mysore 570004 (IN).

(72) Inventors: MURTHY RANGA, Arjun; No.2635/1, 2nd
Main, V.V. Mohalla, Karnataka, Mysore 570002 (IN).
KIRAN RANGA, Vasu; No 45, 3rd Cross, 3rd Block,
Jayalakshmiipuram, Karnataka, Mysore 570012 (IN). HA-
LADKER, Hersh; 8-2-608/1/5/D, Karama Enclave, Ban-
jara Hills, Road No. 10, Telangana, Hyderabad 500034 (IN).
CHAWDA, Jinal; 11-13-1347/2, Flat no.206, Sri Lakshmi
Nivas, Road No.4, Margadarshi Colony, Kothapet, Saroor-
nagar, Telangana, Hyderabad 500035 (IN).

(74) Agent: STRATEGIC INTELLECTUAL PROPERTY
SOLUTIONS; Villa No. 270 A, Prestige Ozone, White-
field, Karnataka, Bengaluru 560066 (IN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

(54) Title: IOT ENABLED INTEGRATED ELECTRONIC PRAYER SYSTEM

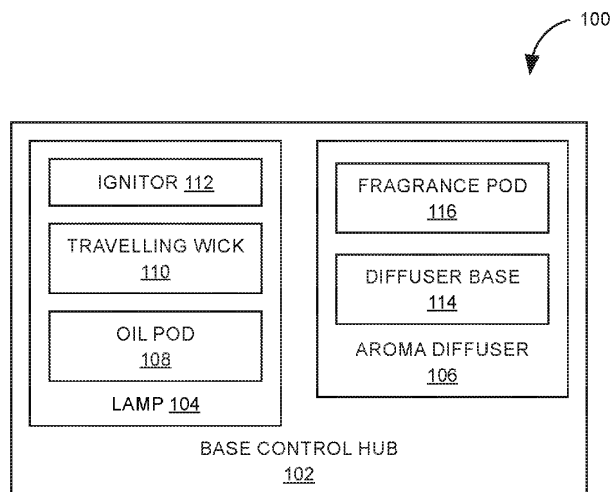


FIG. 1

(57) Abstract: An Internet of Things (IoT) enabled integrated electronic prayer system is provided. The system includes a base control hub that is configured to support at least two devices. The devices include one of a lamp and an aroma diffuser. The base control hub is configured to simultaneously electronically control operation of the at least two devices. The lamp includes an oil pod that is configured to store oil for fuelling the lamp. The lamp also includes a travelling wick in communication with the oil pod and is configured to generate a flame for the lamp. The lamp also includes an ignitor that is configured to receive a signal from the base control hub to ignite the flame. The travelling wick is configured to travel to the igniter in response to the received signals. The aroma diffuser includes a diffuser base that is configured to house one or more diffuser sticks having diffuser wicks. The diffuser base is configured to receive a signal from the base control hub to operate the diffuser sticks. The aroma diffuser also includes a fragrance pod that is configured to

[Continued on next page]

HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UY, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to the identity of the inventor (Rule 4.17(i))*

Published:

— *with international search report (Art. 21(3))*
 — *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

store a fragrance liquid for diffusion via the aroma diffuser. The one or more diffuser sticks are configured to diffuse the aroma of the fragrance liquid through the diffuser wicks in response to the received signal.