

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 January 2003 (30.01.2003)

PCT

(10) International Publication Number
WO 03/009518 A2

(51) International Patent Classification⁷: **H04L**

(21) International Application Number: PCT/US02/23211

(22) International Filing Date: 19 July 2002 (19.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/306,159 19 July 2001 (19.07.2001) US

(71) Applicant (for all designated States except US): **CAPE RANGE WIRELESS, INC.** [US/US]; 5100 McDonnell Avenue, Oakland, CA 94619 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MARGON, Kenneth** [US/US]; 5100 McDonnell Avenue, Oakland, CA 94619 (US).


(74) Agents: **CODDINGTON, Trevor, Q.** et al.; Intellectual Property Department, Brobeck, Phleger & Harrison LLP, 1333 H Street, N.W., Suite 800, Washington, DC 20005 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR MULTIPOINT TO MULTIPOINT DATA COMMUNICATION

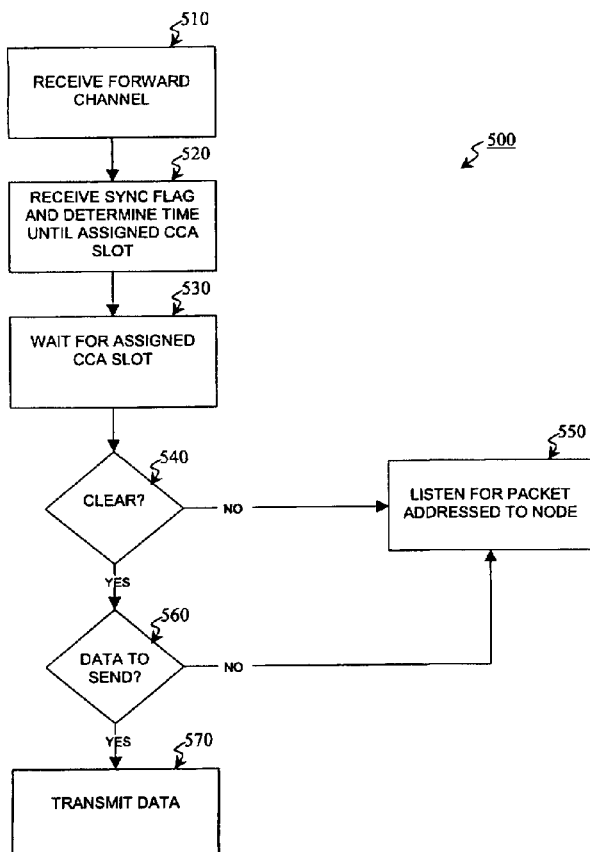

(57) Abstract: A system and method is provide for multi-point to multipoint data communication. In an embodiment of the invention, a system comprises a communications medium interconnecting at least one central server and a plurality of communication nodes. The central server transmits information to the nodes via a Forward Channel and the nodes transmit information via a Reverse Channel. Before transmitting, each of the nodes listens (monitors) during an assigned slot of a Clear Channel Assessment interval of the communications cycle to ascertain whether any other node is transmitting. A give node transmits data only when that node determines that the network is clear. The nodes listen in sequential order, eliminating the probability of collisions caused by simultaneous transmissions from nodes. A query channel interval is provided for nodes not assigned a slot within clear channel assessment interval to request a slot. Assigned slots not used by nodes are allocated to other nodes. The data traffic is accordingly aggregated, thus providing efficient utilization.



WO 03/009518 A2



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*