



(51) International Patent Classification:
E21B 17/00 (2006.01) *E21B 19/00* (2006.01)

(21) International Application Number:

PCT/US2011/037716

(22) International Filing Date:

24 May 2011 (24.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/840,470 21 July 2010 (21.07.2010) US

(71) Applicant (for all designated States except US):
CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 West Loop South, Suite 1700, Houston,
Texas 77027 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROBOTTOM,**
Gavin Paul [GB/GB]; 21 Thames Drive, Garforth, Leeds
LS25 2LA (GB). **THORNBURROW, Edward T.**

[GB/GB]; 4 Moorside Mount, Drighlington, Bradford
BD11 1HY (GB). **HOGG, Nigel** [GB/GB]; 10 Bingham
Road North, Milltimber, Aberdeen AB13 0JD (GB).

(74) Agent: **ROSE, Collin A.**; Conley Rose, P.C., P.O. Box
3267, Houston, Texas 77253-3267 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: OUTER CASING STRING AND METHOD OF INSTALLING SAME

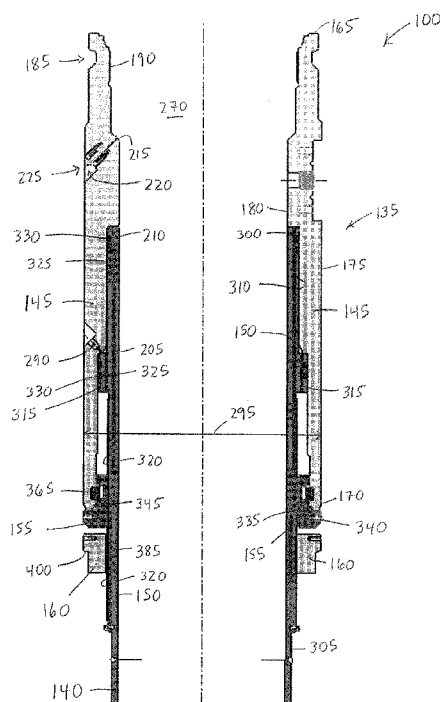


FIG. 2

(57) Abstract: An outer casing string, including a surface casing head, and associated installation method. In some embodiments, the surface casing head includes an outer tubular member insertable through a diverter of an installed conductor system, an inner tubular member at least partially disposed within and moveable relative to the outer tubular member, and a sleeve ring rotatably coupled to the inner tubular. The outer tubular member has an annular recess. The sleeve ring includes a snap ring that is displaceable between an extended position and a retracted position. In the extended position, at least a portion of the snap ring is received within the annular recess, and the outer tubular member is axially immovable relative to the inner tubular member. In the retracted position, no portion of the snap ring is received within the annular recess, and the outer tubular member is axially moveable relative to the inner tubular member.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*