



(43) International Publication Date
24 April 2014 (24.04.2014)

- (51) International Patent Classification:
G06F 3/0487 (2013.01) *G06F 3/041* (2006.01)
G06F 3/0488 (2013.01)
- (21) International Application Number:
PCT/US2013/046015
- (22) International Filing Date:
14 June 2013 (14.06.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/652,104 15 October 2012 (15.10.2012) US
- (71) Applicant: **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).
- (72) Inventors: **WILLIAMS, Jeffrey L.**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US). **FOSTER, Susan Anne**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US). **CLARK, Jason W.**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US). **SCHWARTZ, Samantha Ann**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US). **PILCHER, Aaron Daniel**; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).

(74) Agents: ASSEFA, Brook et al.; The Boeing Company, PO Box 2515, MC 110-SD54, Seal Beach, California 90740-1515 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TURBULENCE MITIGATION FOR TOUCH SCREEN SYSTEMS

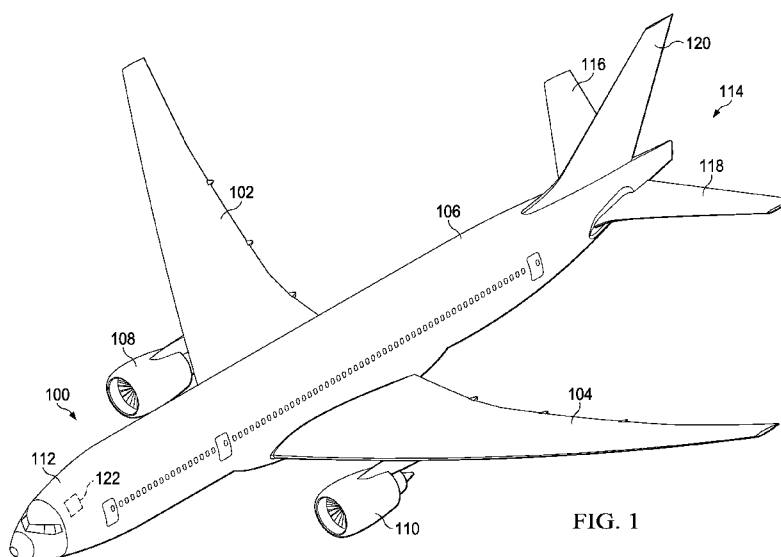


FIG. 1

(57) Abstract: A method and apparatus for managing a touch screen system. Data generated by an acceleration detector about acceleration of the touch screen system is received. The acceleration detector is located within the touch screen system. An action is initiated by an input manager when the acceleration of the touch screen system reduces usability of the touch screen system.

