



(51) International Patent Classification:

E06B 5/10 (2006.01) *E06B 9/24* (2006.01)
E06B 3/67 (2006.01) *E06B 3/08* (2006.01)

(21) International Application Number:

PCT/US2011/040154

(22) International Filing Date:

13 June 2011 (13.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/359,630 29 June 2010 (29.06.2010) US

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **REUTER, Robert, J.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SHERMAN, Audrey, A.**

[US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: **GALLO, Elizabeth, A.** et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: METHOD OF APPLYING WINDOW FILM

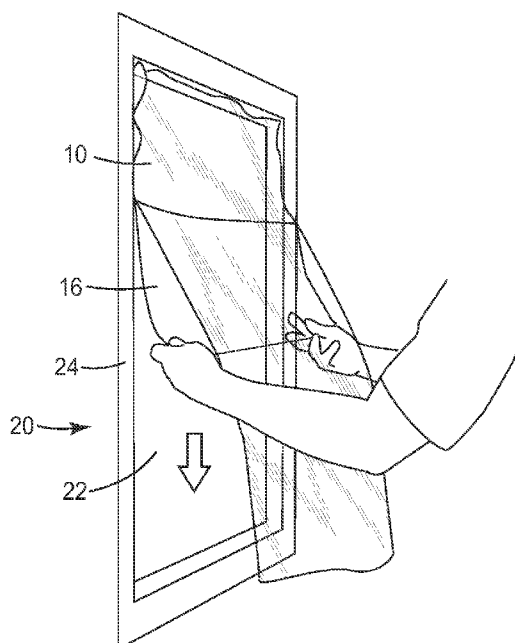


FIG. 2c

(57) Abstract: Disclosed herein is a method of applying window film to a window without water. The method includes providing a laminate having an adhesive layer disposed between a window film and a release liner. A portion of the adhesive layer is exposed and contacted with a window pane, and this sequence of steps is repeated until the adhesive layer is completely exposed. The window film is smoothed to the edges of the window pane and trimmed such that a gap between the edges of the window film and the frame is from about 1/32 to about 1/4 inches. Trapped air from between the window film and the window pane by pushing the trapped air out from between the adhesive layer and the window pane using the flat edge of a tool. The adhesive layer may be self-wetting and/or removably repositionable. The window film may be a solar film, an anti-shattering film, a privacy film, a decorative film, a graphic, a radio frequency blocking film, or a combination thereof.



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*