

(51) International Patent Classification:
H01G 13/00 (2006.01)(21) International Application Number:
PCT/US2012/072337(22) International Filing Date:
31 December 2012 (31.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/671,546 7 November 2012 (07.11.2012) US(71) Applicant: **CARVER SCIENTIFIC, INC.** [US/US];
8000 GSRI Avenue, Baton Rouge, LA 70820 (US).(72) Inventors: **CARVER, David**; 8000 GSRI Avenue, Baton Rouge, LA 70820 (US). **CARVER, Robert**; 6929 Commerce Circle #2201, Baton Rouge, LA 70809 (US). **REYNOLDS, Sean**; 6929 Commerce Circle #5309, Baton Rouge, LA 70809 (US).(74) Agent: **YOUNG, Mark**; 12086 Ft. Caroline Rd., Unit 202, Jacksonville, FL 32225 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: HIGH ENERGY DENSITY ELECTROSTATIC CAPACITOR

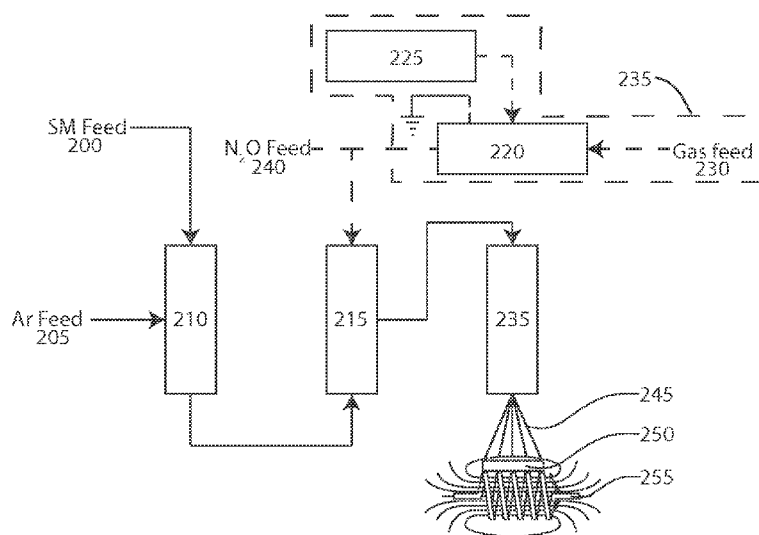


FIGURE 3

(57) **Abstract:** A solid state electrical energy state storage device includes multiple dielectric layers or an integral heterogeneous dielectric layer. Layers or portions of the heterogeneous layer have permittivity augmented by exposing the dielectric material to electric and/or magnetic fields during formation of the dielectric before complete solidification. Such exposure results in radicals and/or an ordered matrix. A dielectric for the device may contain a new xylene based polymer formed under atmospheric conditions via reaction with monatomic oxygen and provided an augmented permittivity through exposure of the polymer to a magnetic field and/or an electric field during condensation and solidification on a substrate.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*