

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 November 2005 (17.11.2005)

PCT

(10) International Publication Number
WO 2005/108472 A1

(51) International Patent Classification⁷: **C08J 3/00**,
A61L 15/60, C08L 33/00, B01J 20/26

(21) International Application Number:
PCT/JP2005/008577

(22) International Filing Date: 28 April 2005 (28.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-138866 7 May 2004 (07.05.2004) JP

(71) Applicant (for all designated States except US): **NIPPON SHOKUBAI Co., Ltd.** [JP/JP]; 1-1, Koraibashi 4-chome, Chuo-ku, Osaka-shi, Osaka, 5410043 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NAKAMURA, Masatoshi. MIYAKE, Koji. SHIBATA, Hirofumi.**

(74) Agent: **HARAKENZO WORLD PATENT & TRADE-MARK**; Daiwa Minamimorimachi Building, 2-6, Tenjinbashi 2-chome Kita, Kita-ku, Osaka-shi, Osaka, 5300041 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: WATER ABSORBING AGENT AND PRODUCTION METHOD THEREOF

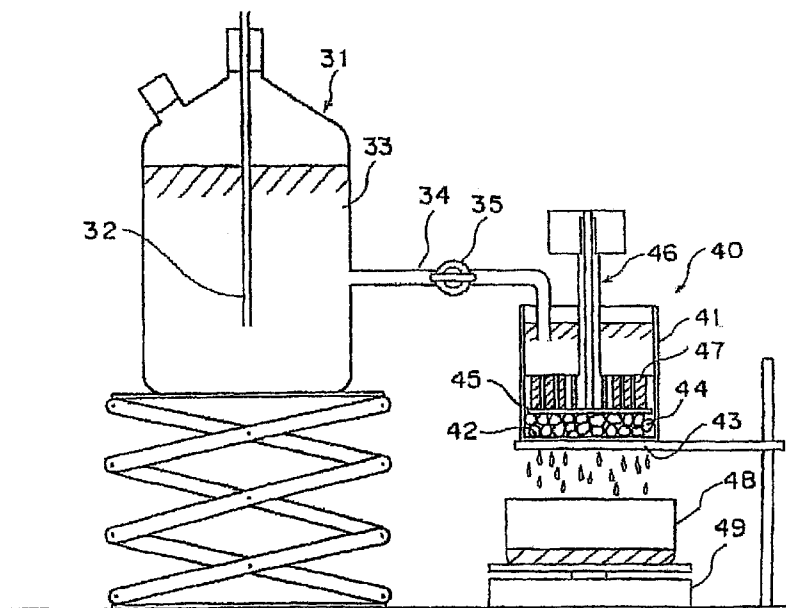

(57) Abstract: According to a water absorbing agent of the present invention and a method of the present invention for producing the water absorbing agent, (i) water absorbent resin particles having an internal cross-linked structure obtained by polymerizing a water-soluble unsaturated monomer, (ii) organic acid (salt), and (iii) water-soluble multivalent metal salt are mixed, so that it is possible to provide a water absorbing agent which suppresses permeation of metal components into the water absorbent resin particles and enables the metal components to evenly adhere to an entire surface of the water absorbent resin in a dot manner.

WO 2005/108472 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.