



- (51) **International Patent Classification:**
B67D 5/56 (2006.01)
- (21) **International Application Number:**
PCT/US2012/056862
- (22) **International Filing Date:**
24 September 2012 (24.09.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/239,611 22 September 2011 (22.09.2011) US
- (71) **Applicant:** VELTEK ASSOCIATES, INC. [US/US]; 15 Lee Boulevard, Malvern, Pennsylvania 19355 (US).
- (72) **Inventors:** VELLUTATO, Arthur, L., Jr.; 122 Woodmint Drive, West Chester, Pennsylvania 19380 (US).
BAKER, Anthony, Walter; 995 Scarlet Oak Drive, Chalfont, Pennsylvania 18914 (US).
- (74) **Agent:** WEISSMAN, Peter, S.; Blank Rome, Llp, 600 New Hampshire Avenue, N.W., Washington, District of Columbia 20037 (US).


(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** MIXING AND DISPENSING APPARATUS

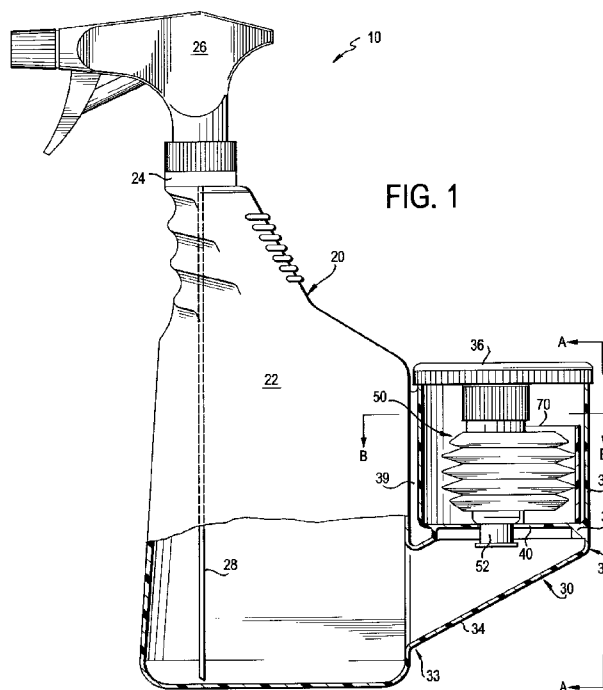

(57) **Abstract:** A mixing and dispensing apparatus having first and second containers. The first container has a main body portion which retains a first substance. A separate compartment is located in the first container and an internal passageway is formed between the main body portion and the compartment. The second container is configured to retain a second substance, and is compressible. The second container has a top end and a closed spout, wherein the closed spout is located in the compartment with the spout extending through the internal passageway into the main body portion of said first container.