

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

86 9700925-2




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01J 29/02, 29/07	A1	(11) International Publication Number: WO 96/08029 (43) International Publication Date: 14 March 1996 (14.03.96)
(21) International Application Number: PCT/IB95/00675 (22) International Filing Date: 22 August 1995 (22.08.95) (30) Priority Data: 08/300,684 2 September 1994 (02.09.94) US (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE). (72) Inventors: ADAMSKI, Alfred; 415 Benninton Court, Saline, MI 48176 (US). DOEPKER, Brian; 5523 Cambridge Club Circle, Ann Arbor, MI 48103 (US). (74) Agent: VAN STRAATEN, Joop; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(91) Designated States: CN, JP, KR, SG , European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

SG copy (RTMT)

(54) Title: **STIFFENED SUPPORT SPRINGS AND CRT INCORPORATING SAME**

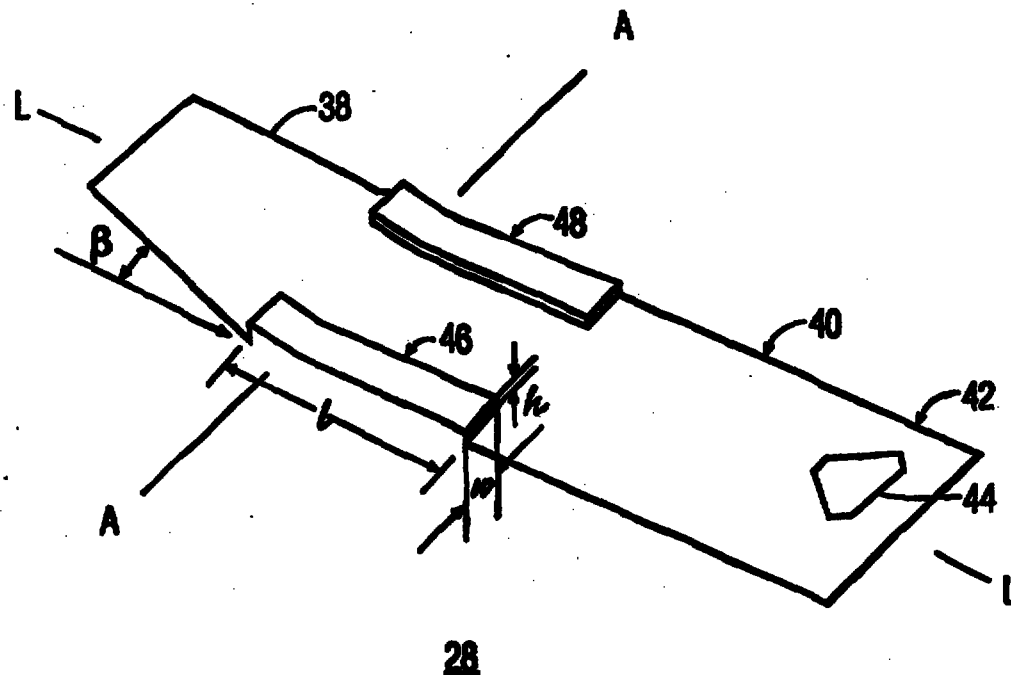

(57) Abstract

Resistance to deformation of a support spring for the mask-frame assembly of a cathode ray tube is improved by adding strengthening ribs running longitudinally along the edges of the body and partially into the base of the spring.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

9700925-2

STIFFENED SUPPORT SPRINGS AND CRT INCORPORATING SAME

This invention relates to cathode ray tubes (CRTs) for color television, and more particularly relates to the bimetal springs which support the aperture mask-frame assembly in the face panel portion of the glass envelope of the CRT.

Cathode ray tubes (CRTs) used in color television commonly employ an aperture mask suspended a short distance behind the face panel portion of the tube's glass envelope. The function of the aperture mask is to direct the electron beams emanated by the electron gun or guns in the neck portion of the envelope to the proper phosphor elements of the luminescent display screen, which is located on the inner surface of the face panel. The suspension arrangement for suspending the aperture masks must be capable of maintaining the mask in the proper position during the tube's operation, in order to prevent mis-registration of the apertures and the phosphor elements. Such mis-registration could result in the electron beams landing on the wrong phosphor elements, causing degradation of the color purity of the display image.

In one design, the mask, which is a relatively thin sheet of metal containing a large number of small apertures, is supported by a rigid support frame, and the frame is supported in the panel by a number, e.g. three or four, bimetal springs mounted to the sides of the frame. These springs are designed to deflect upon heating during the tube's initial warm-up period in order to maintain registration between the mask and screen.

One end of each support spring is connected, e.g. welded, to the mask frame, while the other end defines an aperture which engages a mounting stud embedded in the side wall or skirt of the glass face panel. Between the ends, the spring is bent in order to lift the main portion of the spring out of the plane of the welded end. The angle of the bend determines the spring load required to deflect the spring to allow insertion of the mask-frame assembly into the panel.

Because registration between the mask apertures and the phosphor elements on the luminescent screen is so critical, the mask is used in the manufacture of the display screen. In order to insure registration, the photosensitive layers containing the different color phosphors are exposed through the mask. Because there are three separate exposures for three separate colors (red, blue, green), the mask-panel assembly must be

inserted and removed from the panel several times before final assembly.

After final insertion of the mask-frame assembly into the panel to form the panel-mask assembly (PMA), it is critical to the operation of the tube that the registration between the apertures and the phosphor elements be maintained. If the picture tube is mis-
5 handled, for example, dropped or jarred during packing, shipping or storing, the mechanical forces on the tube will be transmitted to the support springs through the panel via the studs. Since the springs are cantilevered, they can experience very high torsional loading in the area of the bend radius. If the torsional loading causes permanent deformation of one or more of the springs, the tube must be rejected.

10 Various means have been suggested to improve the resistance of such support springs to mechanical shock. In JP-A 56-97944, the main portion of the spring is constituted by two slightly non-parallel legs; in JP-A 56-97945, the main portion of the spring is constituted by two legs, one of which has an arc shaped curve; other patents, such as 4,670,687, describe mask assemblies which do not have rigid support frames and which
15 have corner mounting systems employing leaf springs having lower spring rates than the side-mounted springs employed with rigid frames.

It is an object of the invention to provide an improved support spring for side-mounted attachment to the frame of a CRT mask-frame assembly.

20 It is another object of the invention to provide such a support spring having improved resistance to permanent deformation.

It is another object of the invention to provide such a support spring which is readily manufacturable.

25 It is another object of the invention to provide a CRT incorporating one or more improved support springs.

In accordance with one aspect of the invention, there is provided a support spring for a CRT comprising at one end a base portion for attachment to a side of a support frame for an aperture mask, an apertured portion at the other end for engagement with a mounting stud in the side wall of a face panel, and a main portion connecting the base
30 and apertured portions, the base portion lying in a first plane, and the main and apertured portions lying in a second plane which intersects the first plane at an angle referred to herein as the bend angle, characterized in that the spring has two raised ribs or embossments extending longitudinally in at least part of the main body portion.

In accordance with a preferred embodiment of the invention, the ribs

extend partially into the base portion. The dimensions of the ribs are chosen to achieve a torsional stiffness sufficient to resist permanent deformation from mechanical shocks due to mis-handling, while maintaining sufficient resilience to protect the aperture mask from deformation.

5 In accordance with another aspect of the invention, there is provided a CRT incorporating one or more of the improved support springs of the invention. The base portions of the springs are attached to the sides of the rigid frame supporting the aperture mask of the CRT, preferably by welding, while the apertured portions engage mounting studs embedded in and protruding from the side wall or skirt of the face panel of the CRT.

10 These and further aspects of the invention will be explained in greater detail by means of examples and with reference to the accompanying drawing, in which:

Fig. 1 is a perspective view, partially cut away, of a color cathode ray tube of the prior art including an aperture mask supported by a rigid frame;

15 Fig. 2 is a front section view of the tube of Fig. 1, taken along the line II-II, showing support springs between the frame and the face panel side wall of the tube;

Fig. 3 is a perspective view of one embodiment of a support spring of the invention having stiffening ribs;

20 Figs. 4 and 5 are perspective views of a support spring of the prior art and a spring of the invention, respectively, showing stress distributions for various torsional loads;

Fig. 6 is a graph of maximum stress at the spring bend in Ksi versus rib width for different rib heights; and

Fig. 7 is a graph similar to that of Fig. 6 for stress at the spring weld.

25 Referring now to Fig. 1, there is shown a perspective view, partly cut away, of a color CRT of the prior art employing an aperture mask and a rigid support frame. CRT 1 has a glass envelope which is made up of funnel portion 10 and face panel portion 11. Located in the rear or neck of funnel portion 10 are three in-line electron guns 12, 13 and 14, which generate electron beams 15, 16 and 17. These beams are directed toward luminescent phosphor screen 18, disposed on the inside of face panel 11. Screen 18 is composed of triplets of individual phosphor elements, one of which is shown, in the form of vertical stripes 19, 20 and 21.

Situated a short distance in front of screen 18 is aperture mask 22, a thin

sheet of metal with a very large number of apertures 23 located to direct the electron beams to the proper phosphor elements on the screen. Mask 22 is supported by rigid frame 24, which is in turn supported by support springs 26, 28 and 30 (Fig. 2) attached at one end to the frame by welds 26a, 28a and 30a. The other end of the springs are apertured, and engage
 5 metal studs 32, 34 and 36 imbedded in the side wall or skirt of panel 11. In this embodiment, which is typical of the prior art, there are three springs, two located near the X axis and one near the Y axis of the tube.

Fig. 3 shows one embodiment of an improved support spring 28 of the invention, which is a strip-shaped member having a base portion 38, a main body portion 40
 10 and an apertured portion 42, having aperture 44, adapted for engagement with a metal support stud in the skirt of the face panel. In accordance with the teachings of the invention, the spring has raised ribs 46 and 48 extending along the edges of the strip in the direction of longitudinal axis L. Indicated in Fig. 3 are the rib height (h), the rib width (w) and the rib
 length (l).

15 The spring is readily fabricated from a coil of spring material, by first stamping, using a die which forms the aperture and the ribs, then bending the spring at axis A to lift the main and apertured portions out of the plane of the base portion, and finally cutting the spring from the coil. When the base portion is welded to the frame, the remainder of the spring will extend away from the frame toward the panel skirt. After
 20 bending, the base and remaining portions of the spring lie in different planes, which planes intersect at an angle of 180 degrees minus the bend angle β .

In the embodiment shown, the ribs lie mainly in the body portion, but also extend partially into the base portion. In order to illustrate the advantages of this spring design, a series of stress plots were generated by Algor modeling for a prior art spring, a
 25 modification of the prior art spring and a spring according to the invention.

Fig. 4 is a stress plot of the prior art support spring fabricated from a composite spring material of Invar (36 wt. percent Ni, remainder Fe) and an alloy of 22 wt. percent Ni, 3 wt. percent Cr, remainder Fe; and having the following dimensions (where "active length" is defined as the distance between the aperture and the bend):

30	active length	: 1.797 inches	(4.56 cm.)
	overall width	: 0.600 inch	(1.52 cm.)
	thickness	: 0.035 inch	(0.09 cm.)
	base length	: 0.750 inches	(1.91 cm.)

bend angle (β) : 10°0'

and placed under a torsional load of about 80 pounds, applied at the aperture in a plane parallel to the tube's "Z" axis. This load is typical for a standard face drop test, in which a tube is subjected to a 35G, 12m sec, 1/2 sine wave impact. As may be seen, the stress level in the area of the bend is 113 Ksi, which is above the elastic limit of the spring material.

Fig. 5 is a stress plot of a spring of the invention, having the same overall dimensions and bend angle as the spring of Fig. 4, and in addition having two strengthening ribs with the following dimensions:

10	rib length	: 0.900 inches	(2.29 cm.)
	rib width	: 0.150 inches	(0.38 cm.)
	rib height	: 0.025 inches	(0.06 cm.)

As can be seen, the high stresses have been reduced at the spring bend line.

Figs. 6 and 7 illustrate graphically data for maximum stresses at the spring bend line and the first weld (weld nearest the bend) at the spring base for various rib heights and widths for a load of 80 pounds applied at the spring aperture in the direction of the tube's "Z" axis. The invariant spring dimensions were as follows:

20	active length	: 1.800 inches	(4.57 cm.)
	overall width	: 0.600 inches	(1.52 cm.)
	thickness	: 0.035 inches	(0.09 cm.)
	base length	: 0.750 inches	(1.91 cm.)
	bend angle β	: 10°0'	
	rib length	: 0.400 inches	(1.02 cm.)

Fig. 6 plots the maximum stress ($S_{1\max}$) at the bend versus rib width (w) ranging from 0.100 to 0.200 inches (0.25 to 0.5 cm), for three different rib heights: 0.015 inch (0.038 cm.) (curve 61); 0.025 inch (0.064 cm) (curve 62); and 0.030 inch (0.076 cm) (curve 63). As may be seen, stresses at the bend decrease with increasing rib width as well as rib height. However, as the height of the rib increases to a point equal to the thickness of the spring material, problems such as increased spring back (tendency of the spring material to remember its original position), cracking and tool life make dimensional control difficult, which affects spring quality.

Fig. 7 plots graphically the stress (S_2) at the first weld (weld closest to the bend) in the base for the same rib heights and widths as in Fig. 6. Stresses at the weld also

decrease with increasing rib height. However, as rib width increases from 0.100 to 0.200 inches stresses first increase slightly before they decrease.

Based on these curves and manufacturing concerns, a rib height (h) of 0.025 inches (0.064 cm.) and rib width of 0.150 (0.038 cm.) inches appear to be optimal.

- 5 This dimensional combination results in a maximum stress at the bend of about 76 Ksi and at the first weld of about 135 Ksi.

For comparison, a model was developed for the prior art spring without ribs under the same 80 pound load, under which the maximum calculated stress at the bend and at the first weld were 113 and 145 Ksi, respectively.

- 10 The invention has been described in terms of a limited number of embodiments. Other embodiments and variations of embodiments will become apparent to those skilled in the art from the above description, and are intended to be encompassed within the scope of the appended claims.

Claims:


THIS SHEET HAS BEEN
REPLACED



1. A cathode ray tube comprising: an envelope including a funnel portion and a face panel portion; at least one electron gun in the rear of the funnel portion; a luminescent phosphor screen on the inside of the face panel; and a mask-frame assembly positioned a short distance behind the screen, the mask frame assembly comprising a thin
5 metal sheet having a large number of apertures and a rigid support frame and at least two support springs, each spring having a base portion attached to a side wall of the frame, a body portion extending toward the side wall of the panel, and an apertured portion engaging a support stud embedded in and protruding from the panel side wall, characterized in that at least one support spring has a raised rib extending longitudinally along at least part of the
10 body portion.
2. The cathode ray tube of claim 1 in which there are two raised ribs spaced apart from one another.
3. The cathode ray tube of claim 2 in which the ribs extend at least partially into the base portion of the spring.
- 15 4. The cathode ray tube of claim 2 or 3 in which the ribs are located near opposite longitudinal edges of the spring.
5. The cathode ray tube of claim 1, 2, 3, or 4 in which the ribs have a width in the range of about 0.100 inch to about 0.200 inch, and a height within the range of about 0.015 inch to about 0.030 inch.
- 20 6. The cathode ray tube of claim 5 in which the ribs have a width of about 0.150 inch and a height of about 0.025 inch.
7. A support spring for an aperture mask-frame assembly in a cathode ray tube according to any of the preceding claims.

This Sheet Has Been Replaced



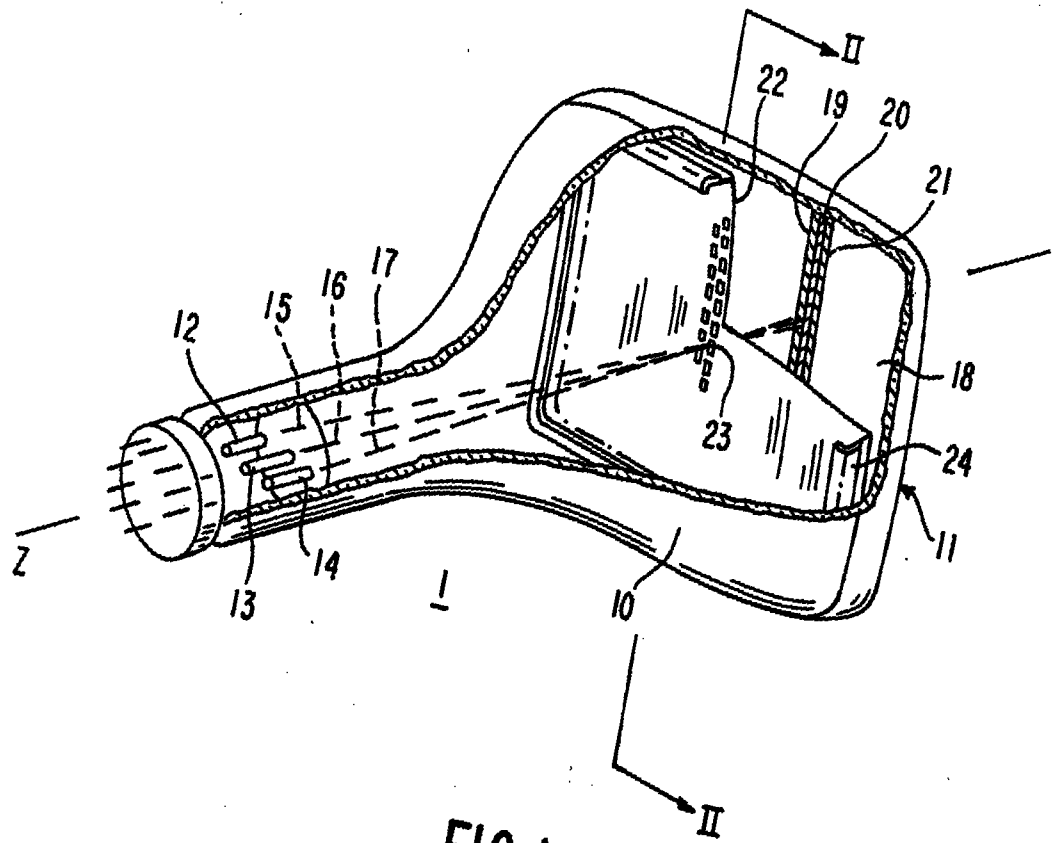

2/4

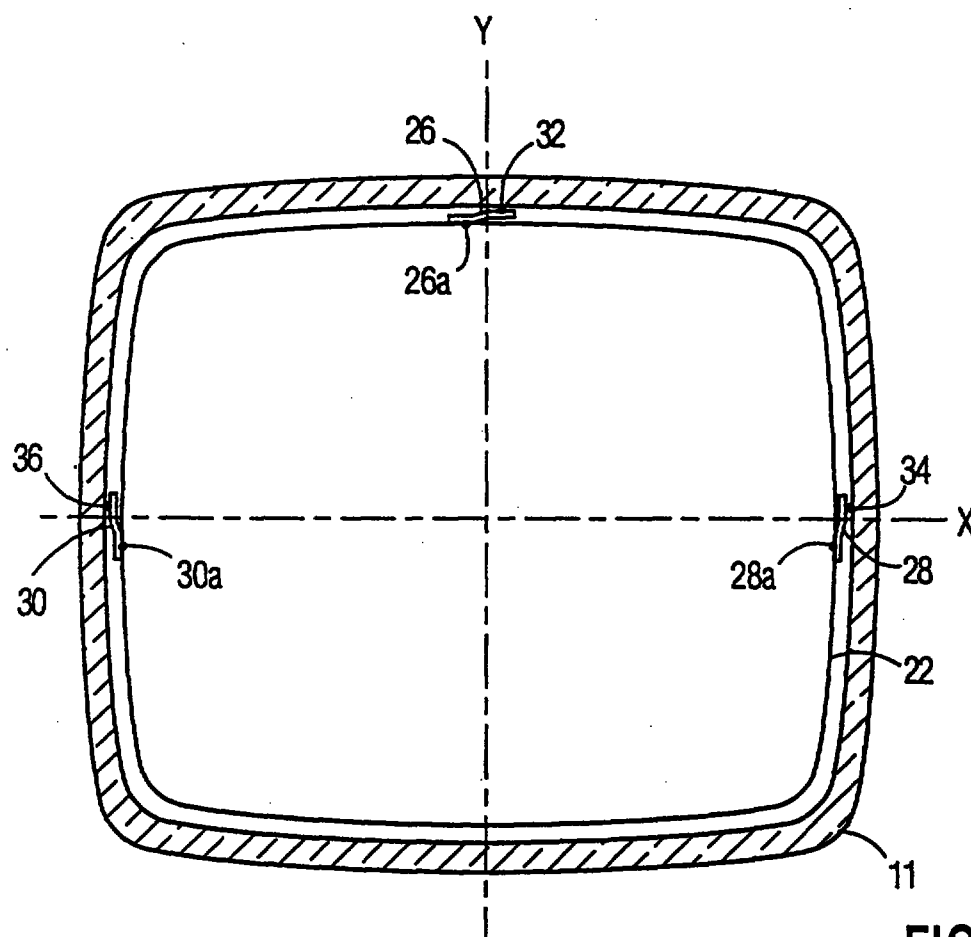


FIG. 2

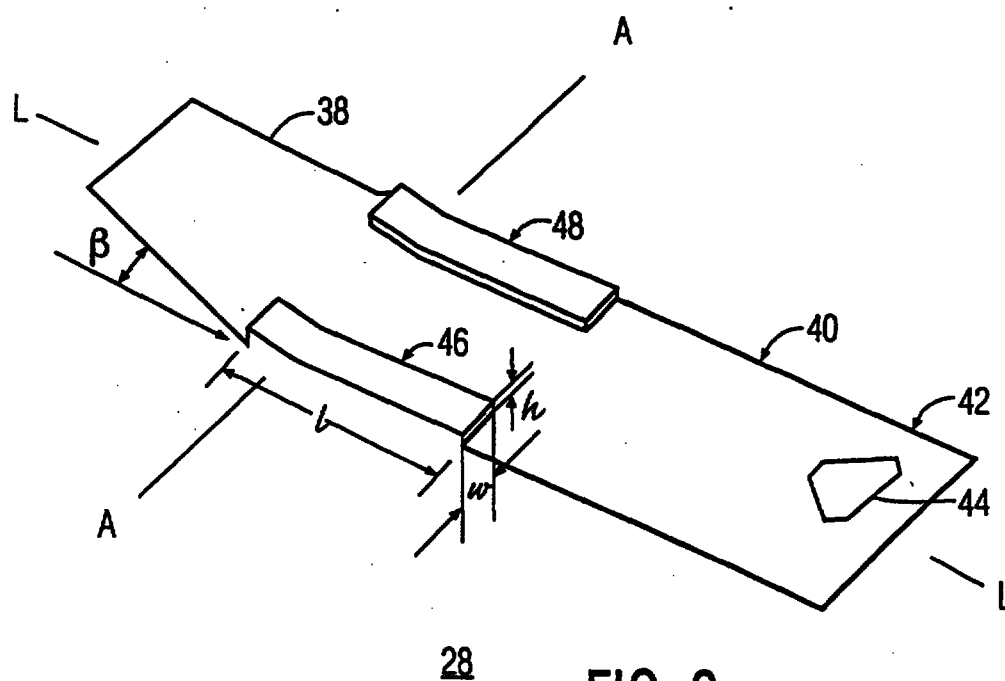


FIG. 3

3/4

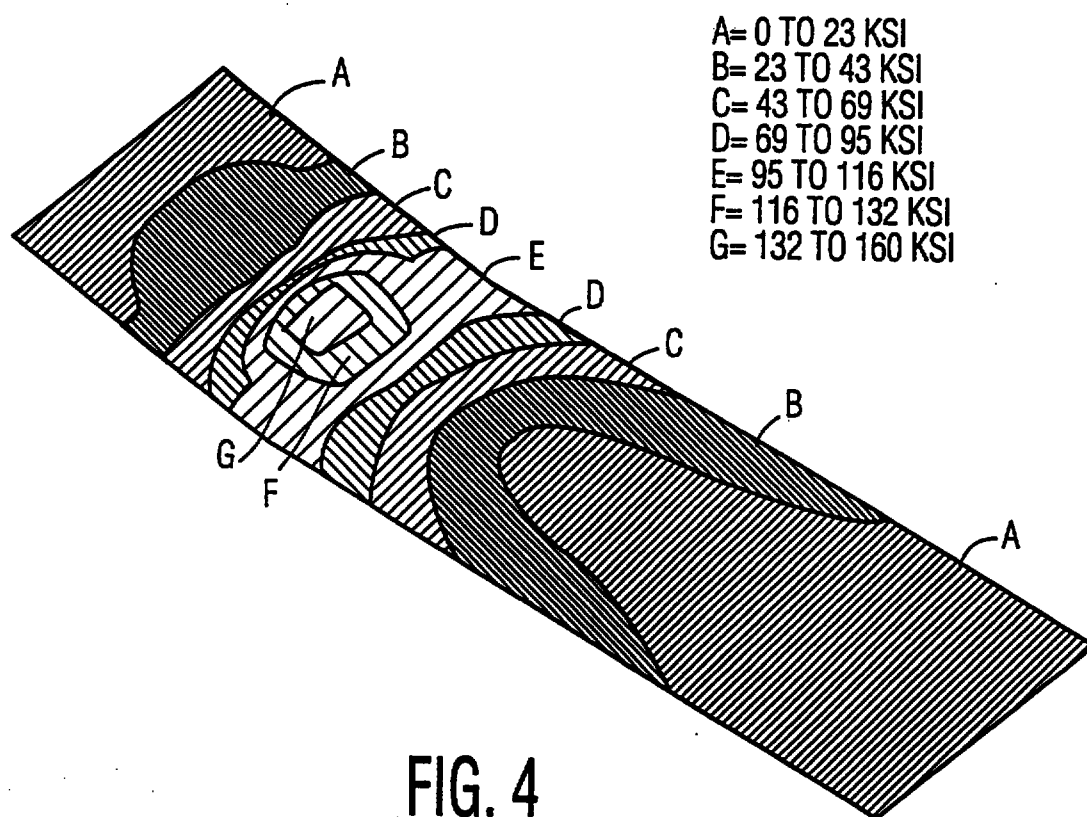


FIG. 4

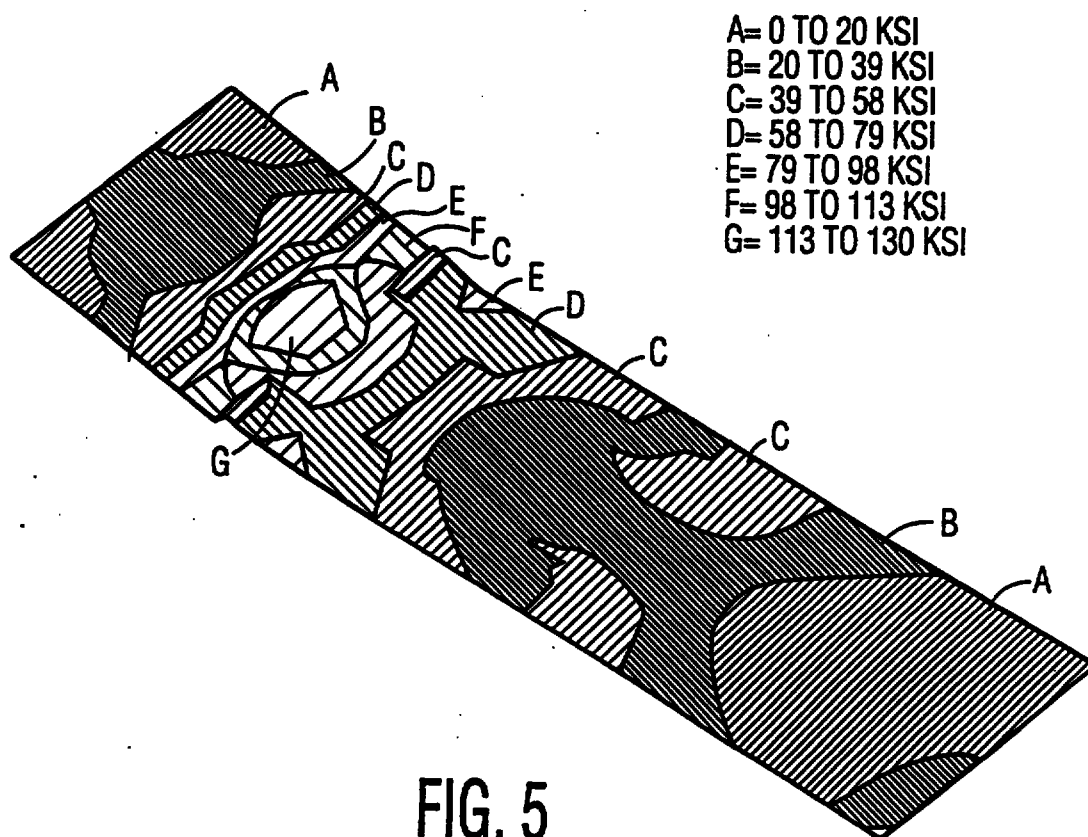


FIG. 5

4/4

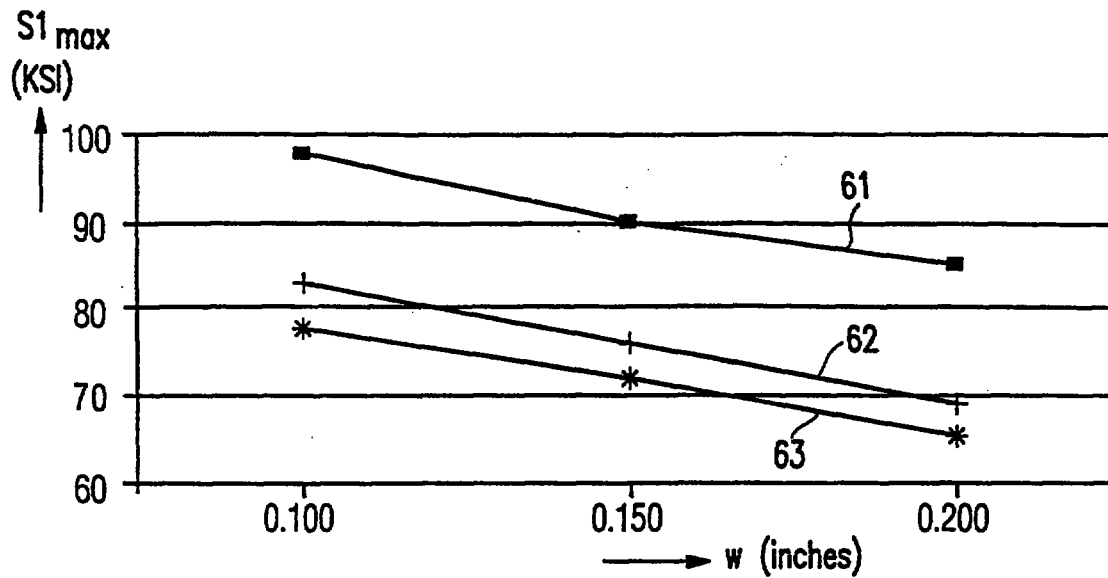


FIG. 6

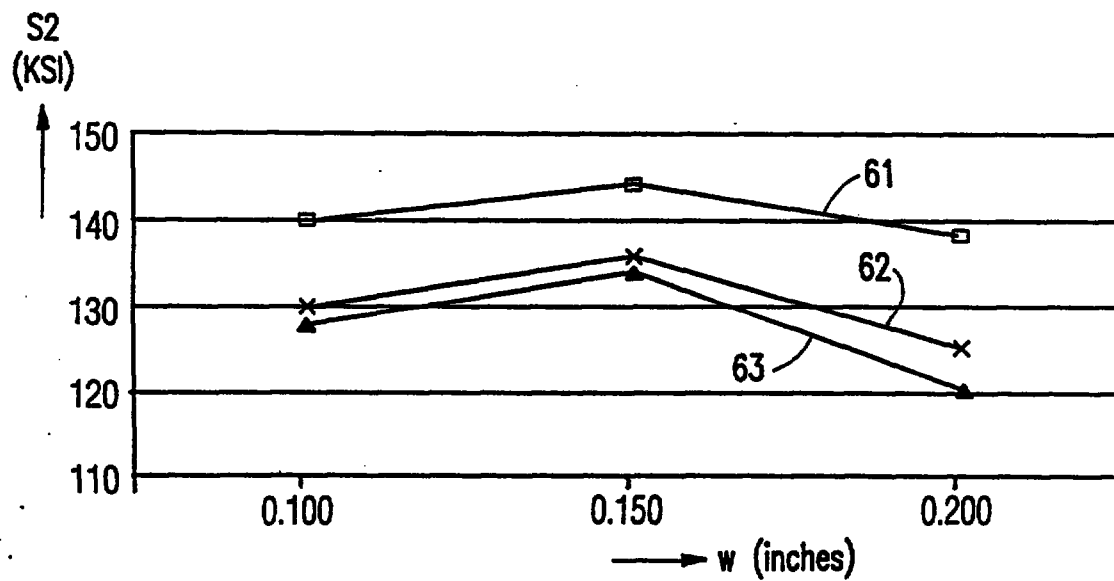


FIG. 7

16-09-1996

Amended page 7

Claims:

1. A cathode ray tube comprising: an envelope including a funnel portion and a face panel portion; at least one electron gun in the rear of the funnel portion; a luminescent phosphor screen on the inside of the face-panel; and a mask-frame assembly positioned a short distance behind the screen, the mask frame assembly comprising a thin metal sheet having a large number of apertures and a rigid support frame and at least two support springs, each spring having a base portion attached to a side wall of the frame, a body portion extending toward the side wall of the panel, and an apertured portion engaging a support stud embedded in and protruding from the panel side wall, characterized in that at least one support spring has an embossment in the spring material of at least the body portion, the embossment forming a raised rib extending longitudinally along at least part of the body portion.
2. The cathode ray tube of claim 1 in which there are two raised ribs spaced apart from one another.
3. The cathode ray tube of claim 2 in which the ribs extend at least partially into the base portion of the spring.
4. The cathode ray tube of claim 2 or 3 in which the ribs are located near opposite longitudinal edges of the spring.
5. The cathode ray tube of claim 1, 2, 3, or 4 in which the ribs have a width in the range of about 0.100 inch to about 0.200 inch, and a height within the range of about 0.015 inch to about 0.030 inch.
6. The cathode ray tube of claim 5 in which the ribs have a width of about 0.150 inch and a height of about 0.025 inch.
7. A support spring for an aperture mask-frame assembly in a cathode ray tube according to any of the preceding claims.



REPLACEMENT SHEET

14 MAR 1997

AMENDED SHEET