

1/15

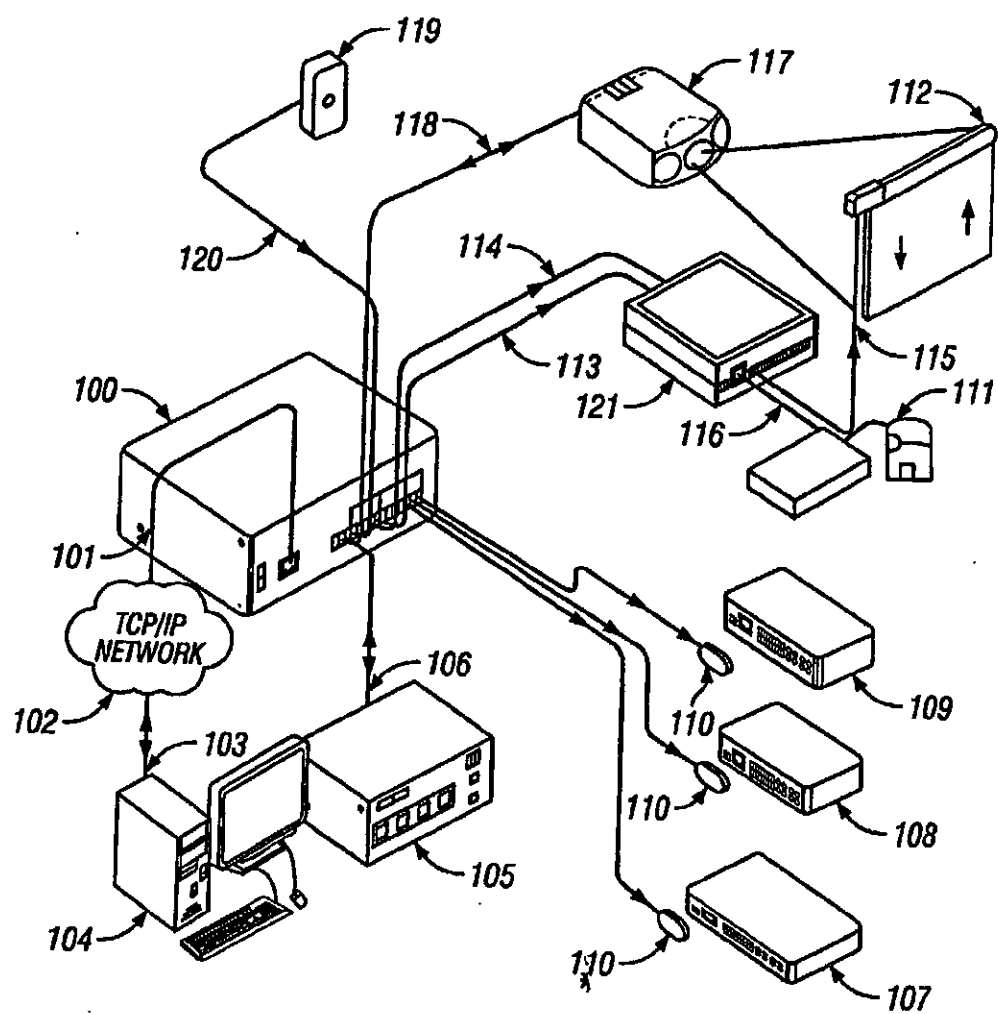


FIG. 1

2/15

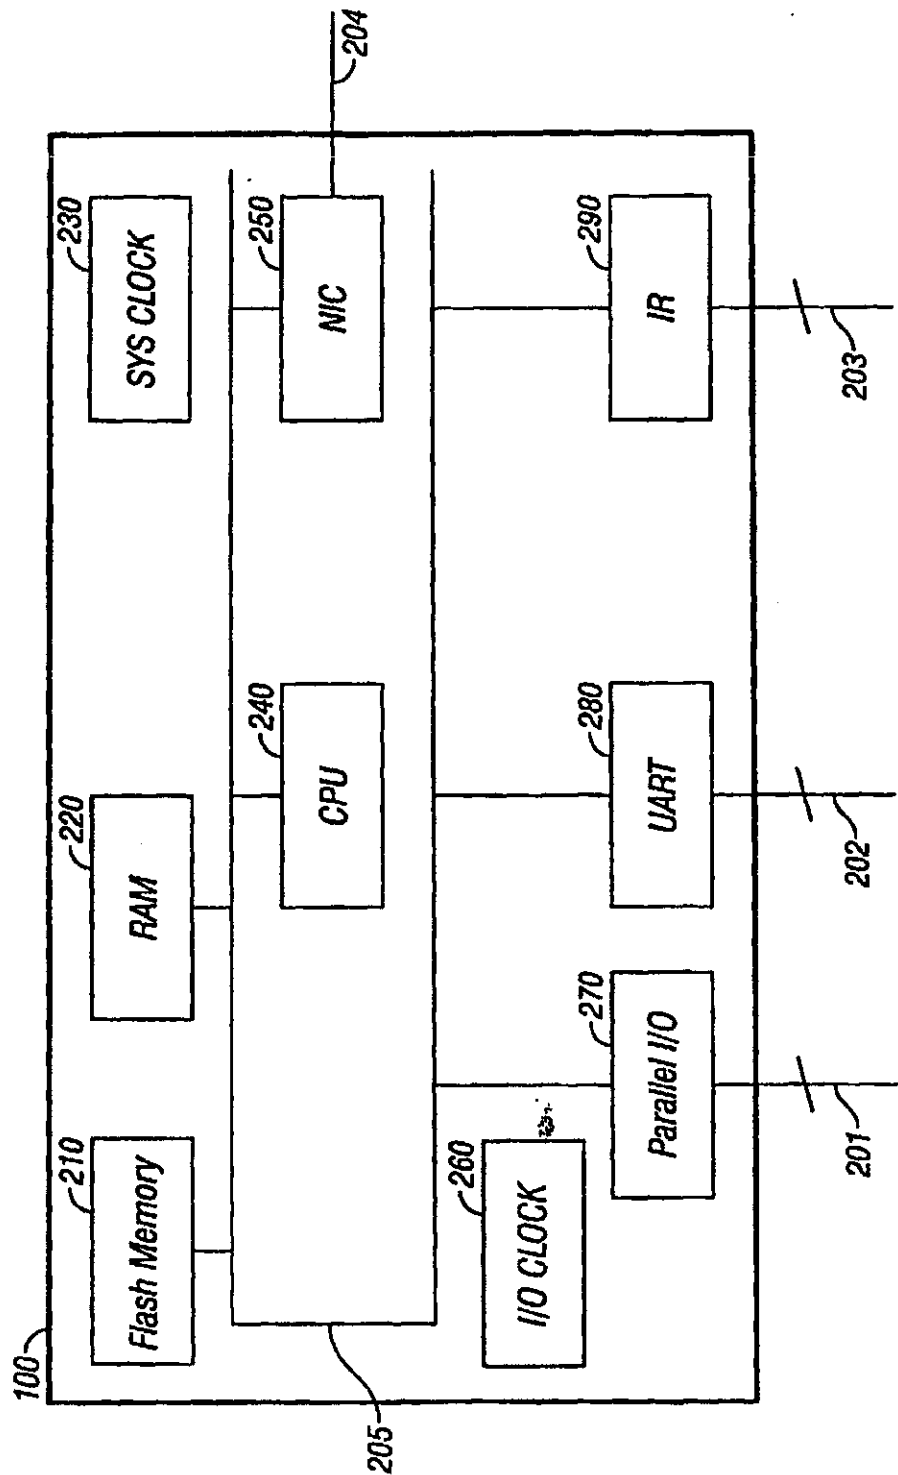


FIG. 2

Serial Port Settings

Serial Port:

☒ 1 ☐ 2

Port type:

RS-232

Baud rate:

9600

Data bits:

8

Parity:

None

Stop bits:

1

Flow control:

None

Submit

Cancel

FIG. 3

Flex I/O Port Settings

Port	Mode	Pull-up	Threshold*	Lower* (0.25,3V)	Upper* (0.25,3V)	Status
1	Digital Input	☒	☒	0.9	1.0	Off
2	Digital Output	☒	☐			Off (5V)
3	Digital Output	☒	☐			Off (5V)
4	Digital Output	☒	☐			Off (5V)

* Lower and Upper Threshold settings are for Digital Input only.

FIG. 4

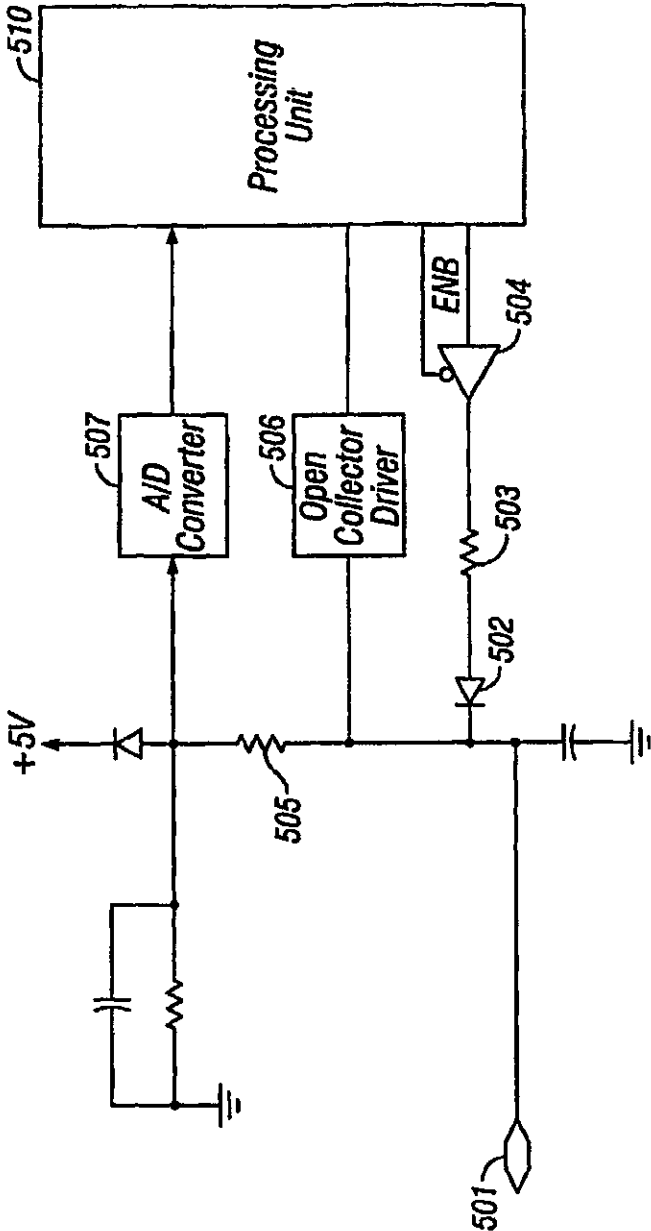


FIG. 5

6/15

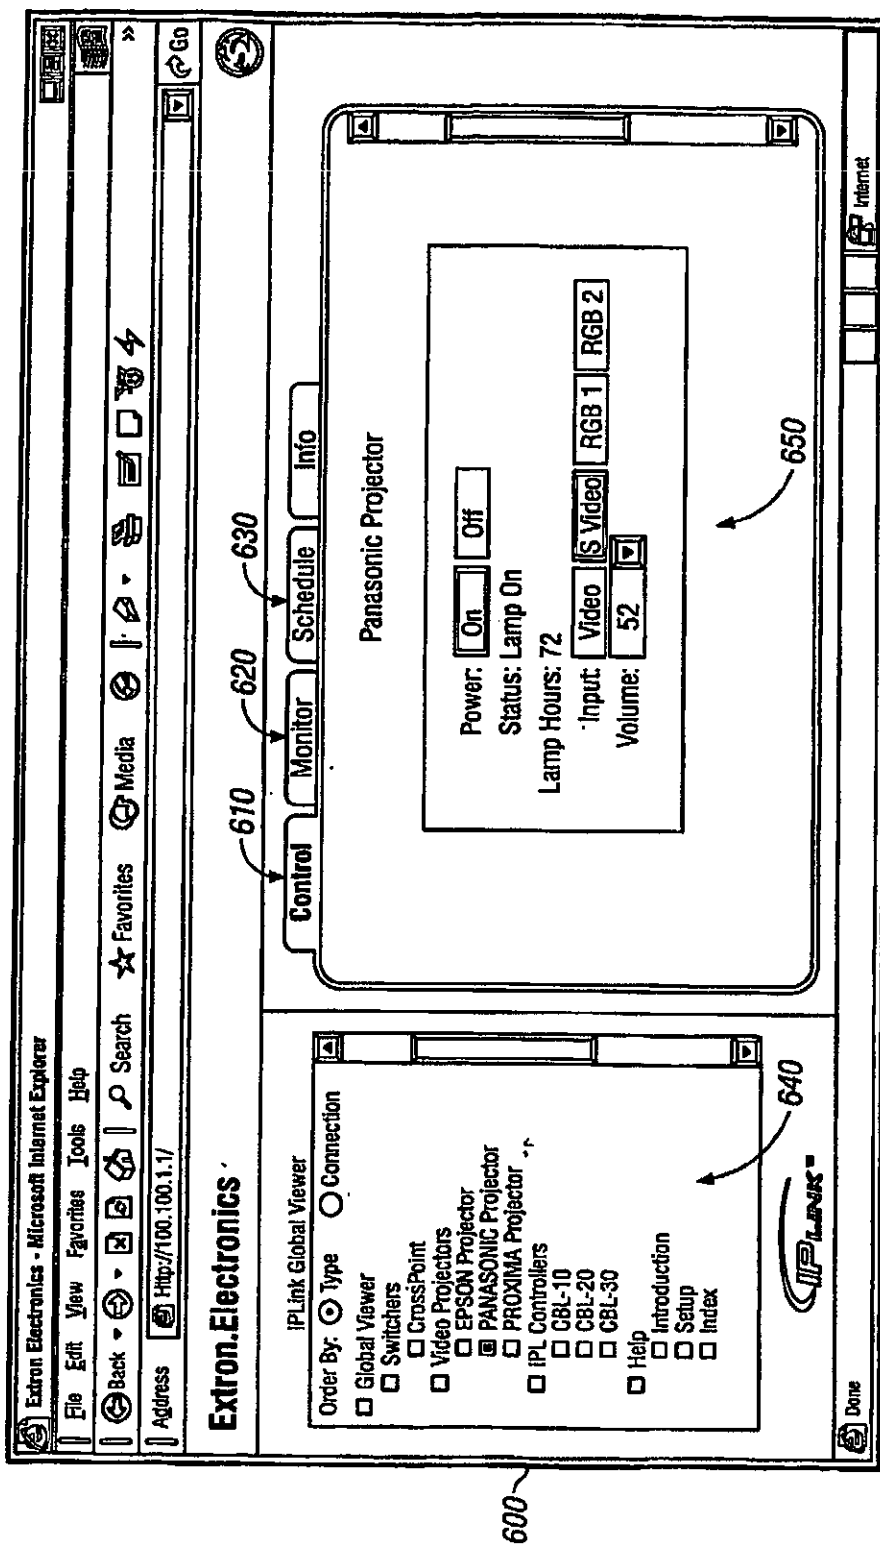


FIG. 6

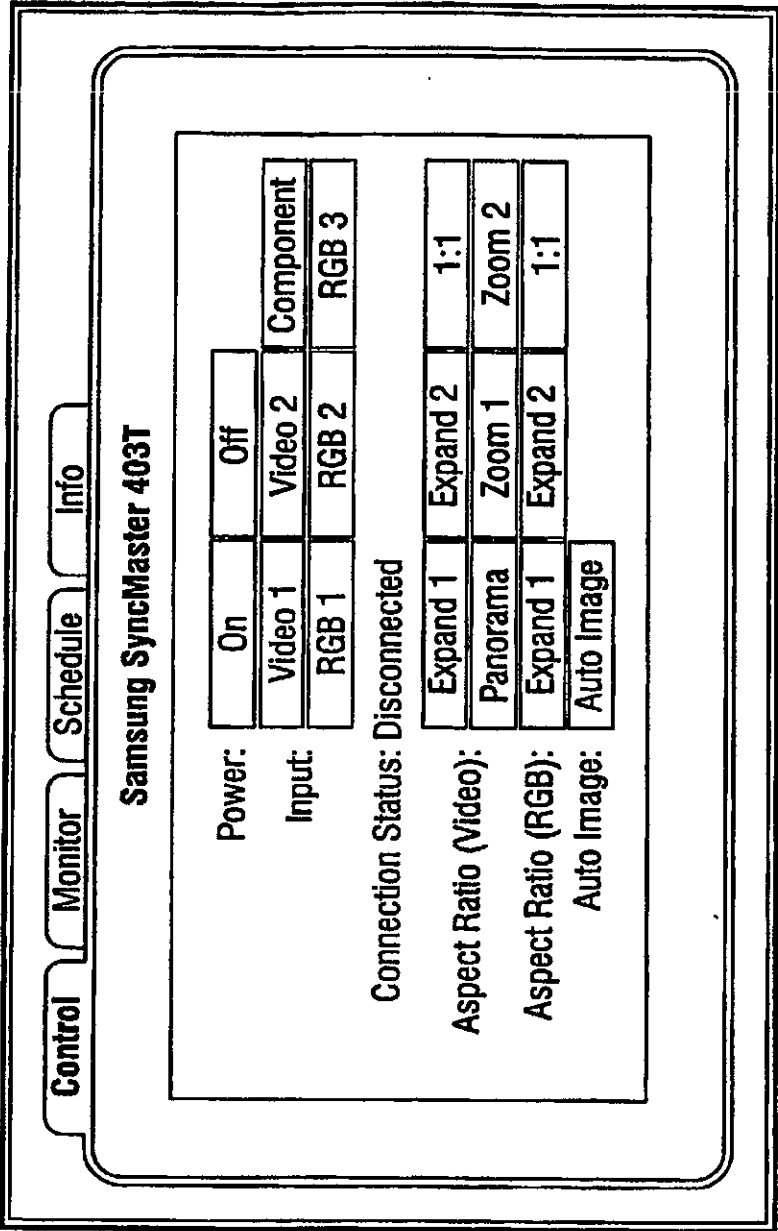


FIG. 7

8/15

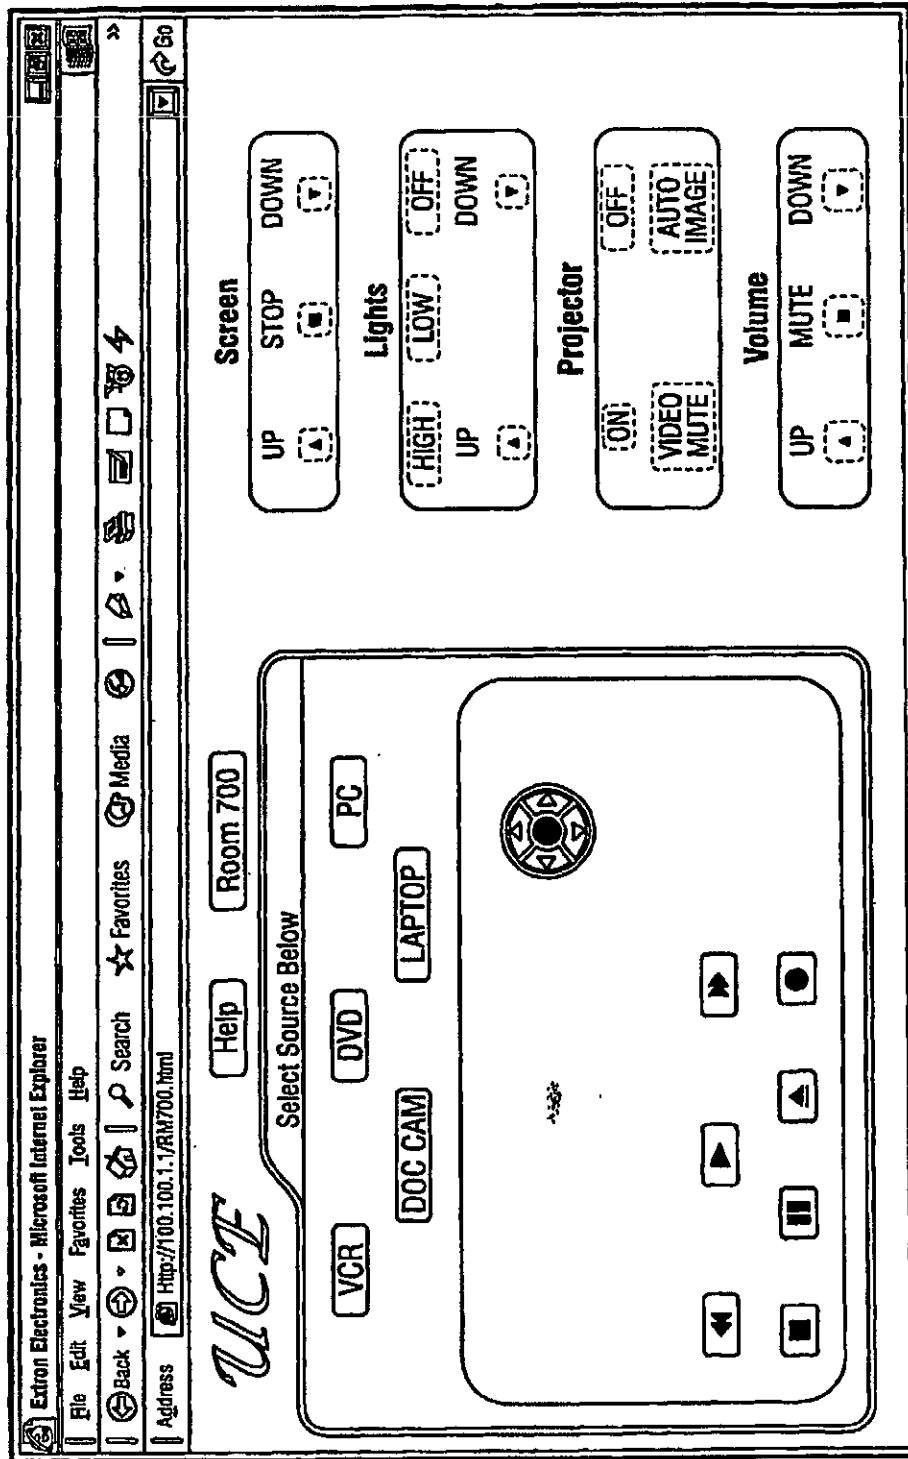


FIG. 8

9/15

Control **Monitor** **Schedule** **Info**

Samsung SyncMaster 403T

Monitor Connection Status: ☒ Enabled

Current: Disconnected

When: Disconnected

Notify Addresses: ☒ Enabled

Wed, 13 Feb 2003 18:32

FIG. 9

10/15

Control

Monitor

Schedule

Info

Samsung SyncMaster 403T

Scheduled At:

12:00

Enabled

Mon	Tue	Wed	Thu	Fri	Sat	Sun
☒	☒	☒	☒	☒	☐	☐

Actions: Power Control : off

Wed, 13 Feb 2003 18:33

FIG. 10

11/15

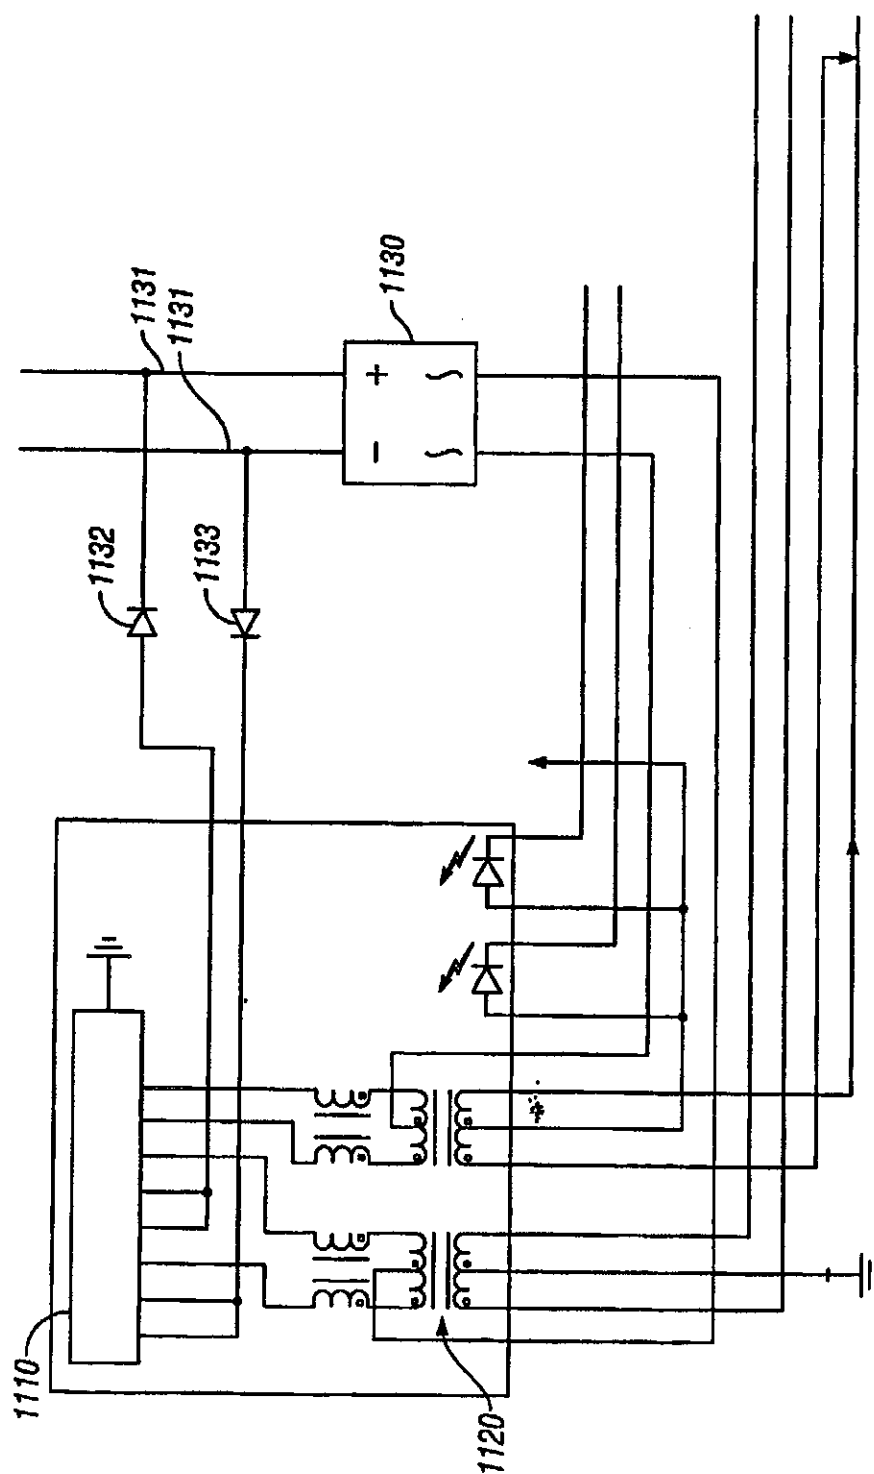


FIG. 11A

12/15

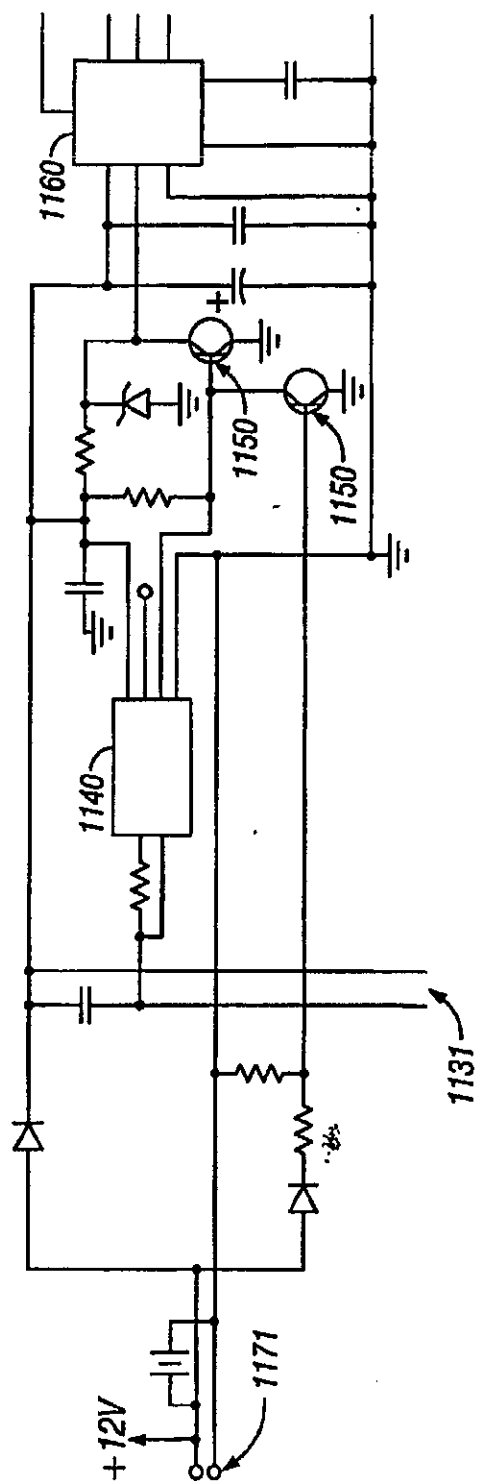


FIG. 11B

13/15

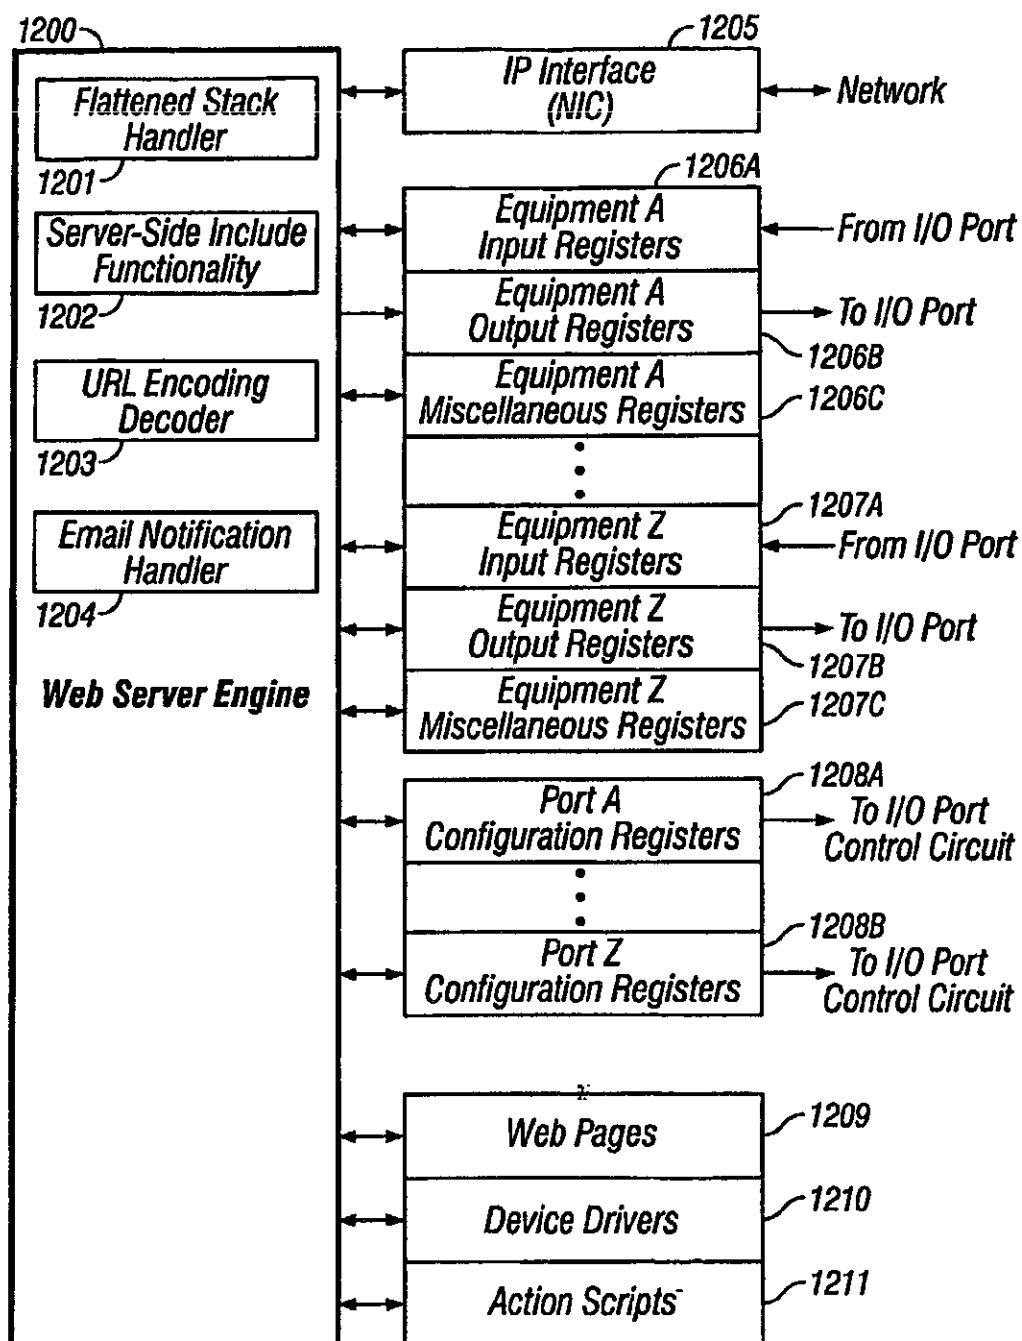


FIG. 12

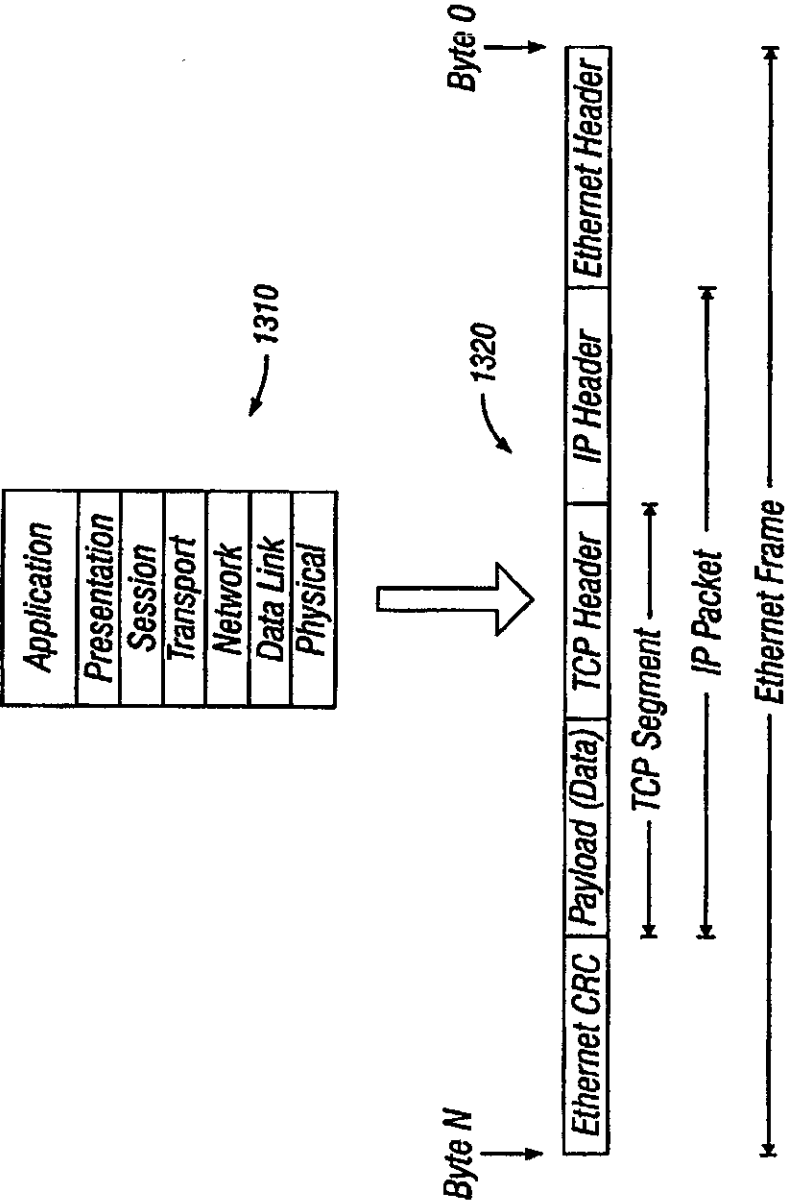


FIG. 13

15/15

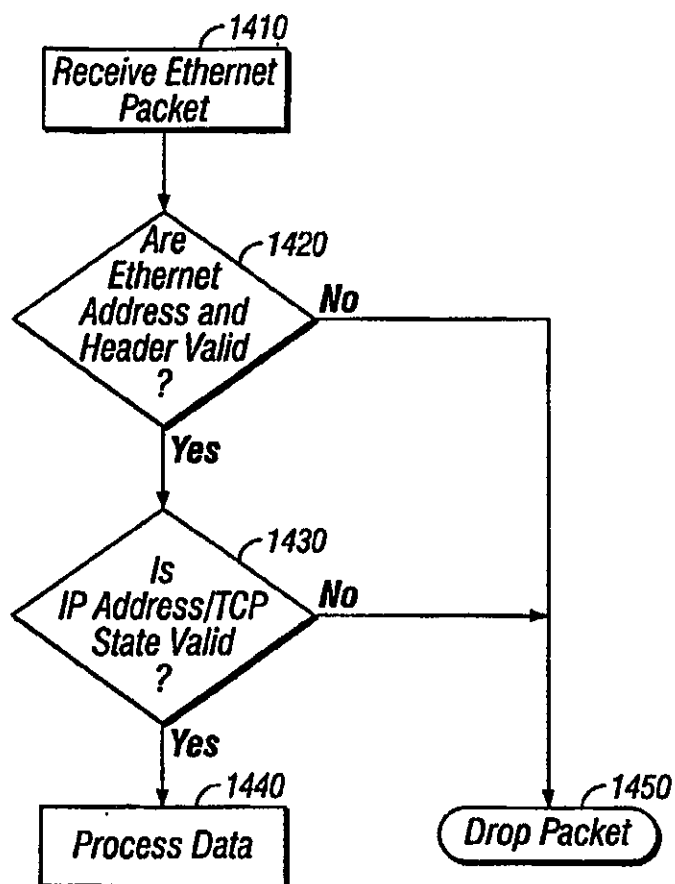


FIG. 14