



(51) International Patent Classification:
B65D 85/10 (2006.01) **B65D 5/66** (2006.01)

(21) International Application Number:
PCT/EP2009/009322

(22) International Filing Date:
30 December 2009 (30.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09250610.4 3 March 2009 (03.03.2009) EP

(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).

(72) Inventor: **CHATELAIN, Lucas**; Eden Roc 11, CH-1073 Savigny (CH).

(74) Agent: **TAYLOR, Gillian Claire**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HINGE LID CONTAINER WITH SLIDING ELEMENT

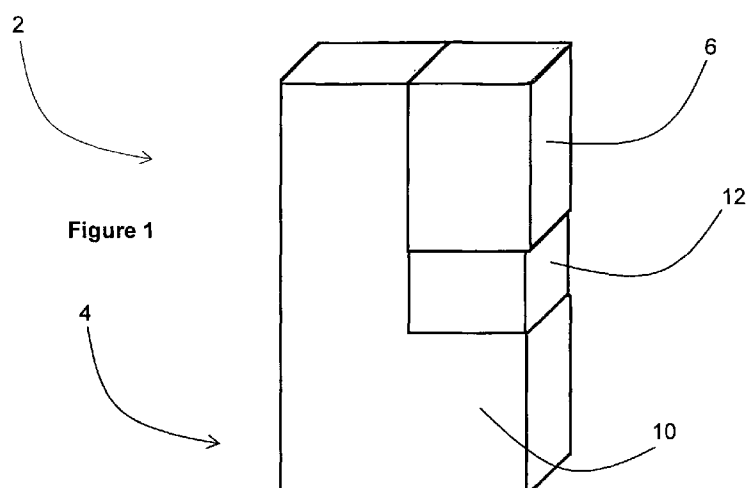

(57) Abstract: A container (2) for consumer goods comprises: a housing (4) and a first sliding element (6). The housing (4) comprises a box (21) and a lid (28) hingedly connected to the box (21) across a hinge line (37) extending across the box back wall (25). Each side wall (22,24) of the box (21) includes an elongate slit (30), wherein the two elongate slits (30) are substantially parallel to each other. The first sliding element (6) is mounted in the elongate slits (30) of the box side walls (22,24) for movement therealong between a first position, in which the lid (28) is closed, and a second position, in which the lid (28) is open. The lid (28) comprises a lid flap (45) which is arranged between the sliding element (6) and the box (21) such that an engagement of the lid flap (45) and the sliding element (6) is capable of opening the lid (21), wherein the lid flap (45) is capable of engaging with the sliding element (6) during movement of the sliding element (6) from the first position to the second position.