

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2008 (06.11.2008)

PCT

(10) International Publication Number
WO 2008/131553 A1

(51) International Patent Classification:

G02B 26/00 (2006.01) G02F 1/01 (2006.01)
A61M 21/02 (2006.01)

(21) International Application Number:

PCT/CA2008/000806

(22) International Filing Date: 28 April 2008 (28.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/924,066 30 April 2007 (30.04.2007) US

(71) Applicant and

(72) Inventor: MARTEL, Alain, Anadi [CA/CA]; 605 Blvd.
Mont-Royal, Ste-Adele, Québec J8B 1L8 (CA).

(74) Agent: ROBIC; Centre CDP Capital, 1001, Square Victo-
ria, Block E - 8e étage, Montréal, Québec H2Z 2B7 (CA).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: LIGHT MODULATION DEVICE AND SYSTEM

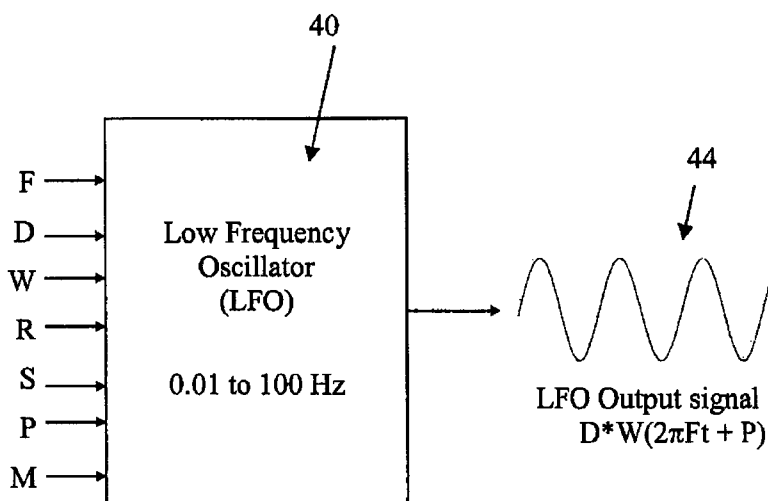


FIG. 3

(57) Abstract: Light modulation devices are provided. At least one Low Frequency Oscillator (LFO) is used to create an oscillating signal used to drive an intensity parameter, a color parameter or both in a light modulator. The oscillating signal may be mixed with a base signal. The modulated signal driving either of the intensity or color parameters may be simple or complex. Systems having a plurality of light projection devices, each associated with a corresponding light modulation device, are also provided. Such Light modulation systems may be used for a variety of applications.