



(51) International Patent Classification:

H04N 5/225 (2006.01) H04N 5/265 (2006.01)
G03B 15/00 (2006.01) H04N 5/272 (2006.01)
G03B 17/00 (2006.01)

(21) International Application Number:

PCT/JP2014/006110

(22) International Filing Date:

5 December 2014 (05.12.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013-267155 25 December 2013 (25.12.2013) JP
2014-210839 15 October 2014 (15.10.2014) JP

(71) Applicant: CANON KABUSHIKI KAISHA [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).

(72) Inventor: OYAMA, Yasufumi; C/O CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).

(74) Agents: ABE, Takuma et al.; C/O CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMAGING APPARATUS, METHOD FOR CONTROLLING IMAGING APPARATUS, METHOD FOR CONTROLLING DISPLAY CONTROL APPARATUS, AND METHOD FOR CONTROLLING RECORDING APPARATUS

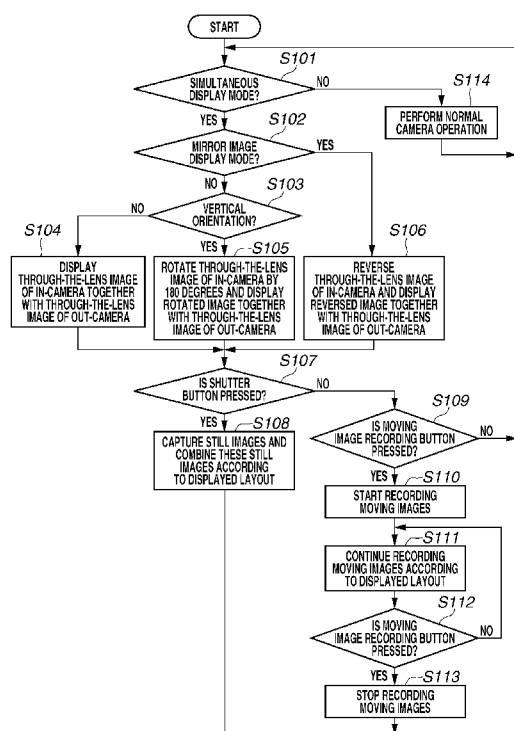

(57) Abstract: An imaging apparatus (100) includes a first imaging unit (13), a second imaging unit (103) configured to image an object in an opposite direction from the first imaging unit, a detection unit (44) configured to detect an orientation of the imaging apparatus, and a control unit (50) configured to perform control for displaying an image captured by the first imaging unit and an image captured by the second imaging unit on a display unit (28) at the same time. The control unit performs control so that the image captured by the second imaging unit is displayed after being rotated if the detection unit detects that the orientation of the imaging apparatus is a predetermined orientation, in a case where the image captured by the second imaging unit is displayed together with the image captured by the first imaging unit without being reversed by a mirror image reversal.