

## COIN HANDLING APPARATUS

This invention relates to coin handling apparatus.

The invention is particularly, but not exclusively, related to apparatus which can accept, store and dispense  
5 coins. Such apparatus is often used with coin-operated vending machines. The apparatus tests inserted coins and stores them if they are acceptable. Unacceptable coins are rejected. If sufficient acceptable coins are inserted, the vending machine is operated. The apparatus dispenses  
10 stored, acceptable coins as change.

Such apparatus generally includes a separate coin container for the or each denomination of coin to be dispensed, and a cashbox for any other coin denominations. When a coin container for a particular denomination of coin  
15 is full, any further incoming coins of the same denomination are directed to the cashbox.

This arrangement uses a pair of sensors for each of the coin containers. One of the sensors is used to determine when the coin container is full so that  
20 further coins are directed to the cashbox. The other sensor determines when the coin container is empty, or near empty, as a result of which the coin apparatus may no longer be able to dispense change, and will give a display indicating that the correct amount should be  
25 inserted.

Each coin container may be a tube which stores the coins in a stack. The empty and full level sensors are mounted adjacent the upper and lower ends of the stack. Each sensor may comprise a light source and a  
5 light sensor positioned on opposite sides of the tube so that the light path is intercepted when a coin is at the appropriate level in the tube.

The fact that each coin container requires two level sensors makes the containers rather expensive and  
10 difficult to construct. Another problem arises in that although the cashbox is regularly emptied, the containers are not and the apparatus tends to keep each container substantially full. This means that the total value of coins kept stored in each vending machine tends to be  
15 fairly high. Owners of a fairly large number of vending machines may find the total value of money tied up in the machines in this manner to be unacceptable.

One could reduce this amount of money by altering the position of the full level sensor. This would of  
20 course reduce the number of times the apparatus could dispense change without being replenished. One could reach a position providing a suitable compromise, but the differing requirements of different vending machine owners may require that they have differently-positioned  
25 level sensors. Adapting the level sensors to each owner's particular require- \_\_\_\_\_

ments would of course substantially increase the manufacturing difficulties.

According to the present invention there is provided coin handling apparatus comprising at least  
5 one coin container, means for selectively directing coins either to a first path leading to the container or to a second path, means for selectively dispensing coins from the container, sensing means for indicating whether or not the number of coins in the container  
10 is greater than a first predetermined value, and a control means operable to keep an estimated running total of the number of coins to the container, to allow said dispensing means to dispense coins when said running total exceeds a second predetermined value,  
15 and to enable said directing means to direct coins to said first path when said running total is less than a third predetermined value, the control means being operable to perform a predetermined alteration of the running total in response to an alteration in the  
20 output of the sensing means caused by a variation in the number of coins stored in the container.

Thus, the storing and dispensing of coins is controlled on the basis of a running total of the coins in the container. The apparatus does not need to have  
25 two level sensors to determine when the container is

(19)

- 3a -

full and empty. Overfilling is reliably avoided, and shortage of change reliably detected, by altering the running total as the level of coins passes that of the sensing means.

The apparatus can easily be adapted to suit differing requirements by changing the predetermined values, which is facilitated by storing them in a memory having alterable contents.

- 5           In a preferred arrangement of the invention, when the apparatus is switched on the running total of the coins in the container is set to an "empty" number, which is less than the first predetermined value, if the sensor indicates that the number of stored coins
- 10 is not greater than the first predetermined value, and set equal to a "full" number, which is greater than the first predetermined value, if the sensor indicates that the number of coins in the container is greater than this first predetermined value.
- 15 Preferably, the "empty" number is equal to zero, and the "full" number may be equal to the maximum permitted number of coins in the container. The "empty" and "full" numbers may be equal to the second and third predetermined values mentioned above.

- 20           So long as the "full" number is not less than the third predetermined value, and the "empty" number is not greater than the second predetermined value,

any alteration in the number of coins stored in the container will be such that the first predetermined value is approached. This is because, if the count is initially set at the "empty" number, the apparatus may direct further coins to the container but will not allow coins to be dispensed such that the count would fall below the "empty" number, and thus below the second predetermined value. If the initial count is set to the "full" number, the apparatus may dispense coins but will only direct further coins to the container if the third predetermined value will not be exceeded. If and when the sensor indicates that the number of stored coins has risen above or dropped to the first predetermined value, the running total is corrected.

The first predetermined value is preferably stored in an alterable memory to allow adjustment for use of the apparatus with coin containers having sensors at different levels. The third predetermined value is also preferably alterable to permit adjustment of the maximum cash value stored in the container at any time, and thereby facilitate adjustment to suit different owners' requirements and avoid the problems mentioned

above.

The above-described arrangement has an additional advantage, in that the apparatus assumes that the coin container is filled to its maximum permitted level if on switch-on the number of coins in the container exceeds the predetermined number detected by the sensor. In fact it is likely that there is less than the maximum permitted number of coins in the container. This means that the level of coins will not be permitted to rise so that the total cash value stored in there stays at less than the maximum

permitted value until after the demand for change increases so that the level drops and the count is corrected.

The term "level sensor" is used herein to describe  
5 a sensor which indicates when the number of coins stored  
in the container is greater than a predetermined number.  
Although in the preferred arrangement the coins are  
stored in a vertical stack so that this predetermined  
number will correspond to a predetermined height or  
10 level, this is not necessarily the case and other  
storage arrangements in which the number of stored coins  
does not correspond to any particular height could be  
used.

In coin handling apparatus it is desirable to  
15 provide a control circuit which can be used, with a  
minimum amount of modification, in conjunction with  
mechanisms and storage facilities suitable for different  
types of coins, for example the coins of different  
countries. It may also be desirable for a number of  
20 reasons to be able to change the way in which the control  
circuit operates. The maximum number of coins to be  
stored in the or each coin container, as referred to  
above, is one example of a parameter which is desirably  
alterable.

In a preferred embodiment of the invention, the control means operates in accordance with at least one parameter stored in an addressable memory, the apparatus further including accessing means for  
5 accessing and altering said at least one parameter.

This parameter may be the maximum permitted number of coins in a coin container. The control means may cause a coin to be directed to the container if a validator indicates that the coin is of the right  
10 denomination and the number of coins already in the container is less than the maximum permitted number. The ability easily to alter this maximum permitted number has the advantages set out above.

Preferably however the accessing means can be used  
15 to access and alter a number of further parameters relating to the way in which coins are handled. For example, if the apparatus has a number of separate coin containers, the memory contents may determined which denominations of coins go to the respective containers.

20 The coins may be directed to their respective locations by movable gates, in which case the memory contents

may also determine the sequence in which the gates are operated, and the intervals for which they are operated.

In an alternative embodiment of the invention, instead of coin-handling parameters the memory stores other  
5 information, e.g. information relating to the values of acceptable coins. Preferably, however, both coin value information and coin-handling parameters are stored.

The control means may be capable of operation with more than one type of validator. An alterable memory  
10 location could be used to identify to the control means which validator is being used.

The memory may also store, in an alterable fashion, one or more price settings the, or each, of which determines how much cash has to be fed to the apparatus  
15 before a product will be vended. Previously, the setting of prices has usually been achieved by operating switches in a control circuit. By storing the price settings in an accessible memory the need for such switches is obviated. Also, the structure and operation of the apparatus is  
20 simplified by providing a common memory and accessing means for price settings and for additional parameters affecting the operation of the apparatus.

5 If the control circuit is arranged to keep a count of coins stored in one or more coin containers each provided with a single level sensor, as described above, another parameter which can be stored in an alterable fashion is the predetermined number of coins which is detected by the level sensor. This enables the control means to be used with different coin containers, or coin containers having differently-positioned level sensors, or containers for use with coins of different thicknesses. The running total, or coin count, could also be stored in a non-volatile fashion but in view of the possibility of manually altering the level of coins when the power is off, it is preferred that the coin count be initialised each time the apparatus is switched on. The coin count can thus be stored in a volatile memory.

10

Previously many, or all, of the coin-handling parameters have been unalterable, which required the construction of different circuits for different types of apparatus. Although switches could have been provided  
5 for altering these parameters, as was done for price setting, this would have taken up a great deal of space, increased costs and enabled unauthorised tampering with the circuit to alter the way in which the apparatus operates. The provision of a non-volatile, accessible and alterable  
10 memory for storing these parameters now enables a single control circuit to be used in a variety of different apparatuses.

The unauthorised alteration of the way in which the apparatus operates can be prevented by employing a  
15 further aspect of the invention, in which an addressable non-volatile memory storing information determining the way in which the apparatus operates has some memory locations which are accessible by operating an input means in a predetermined manner, and other memory locations which  
20 require the input means to be operated in a different manner before they become accessible. Thus, two levels of access are provided, although of course further levels could also be provided if desired. This allows certain memory locations, such as those used for price setting,  
25 to be easily accessible, and preferably alterable while other memory locations storing for example coin-handling

parameters can be accessed only by authorised operators who know the correct way of operating the input means in order to gain access. By way of example, the predetermined manner of operation required to gain access to  
5 particular memory locations may involve inserting a predetermined value into a memory location to which access is already provided.

The use of a non-volatile memory is required to ensure that the stored information determining the way in  
10 which the apparatus operates, including the way it handles incoming coins, is not lost when the power to the apparatus is shut off. The term "non-volatile" is used herein in a broad sense to refer to any kind of memory which can retain information when the main power to the  
15 apparatus is interrupted. This could for example be achieved by using a separate battery power supply for the memory.

However, in a preferred embodiment of the invention the non-volatile memory is of a type which retains its  
20 contents when its own power supply is terminated. In the embodiment to be described below, the non-volatile memory is an electrically alterable read-only memory (EAROM). However, other memories, such as magnetic bubble type memories, could be used instead.

Preferably, the control means is operable to keep an accumulated total of credit which is incremented in response to the insertion of acceptable coins into the apparatus and which is decremented upon the vending of a product. The control means is preferably periodically operable to increment the accumulated total without acceptable coins being inserted. The addressable memory may have alterable contents determining when said incrementing without the insertion of acceptable coins is to take place. Thus, the apparatus is provided with a "discount" feature whereby under certain circumstances a user of the machine may be given extra credit without having to insert coins. Preferably, the user can select whether the extra credit is to be given in the form of change or a vended product.

The apparatus is preferably operable in a "multi-vend" mode, whereby a user can insert coins to accumulate

a credit sufficient to purchase more than one product, and then successively operate the apparatus to vend the products without having to insert coins between the vending operations. In these circumstances, the extra "discount" credit can be given only if the user successively operates the apparatus to vend a predetermined number of products (as determined by the contents of the memory) in a single operation. Alternatively, the discount is provided only if the user purchases, in a single operation, products having a total value at least equal to a predetermined, stored amount.

The apparatus may however additionally, or alternatively, provide the "discount" credit in a "single-vend" mode, in which case the apparatus may provide the "discount" credit after a predetermined number of operations of the apparatus.

The ability easily to alter the contents of the memory determining when the "discount" credit is given enables the apparatus to be easily adjusted to suit individual owners' requirements.

Preferably the coin handling apparatus is provided with a digital display which can be operated to reveal the contents of some or all of the memory locations. The display may also provide a display of memory addresses so that the memory can be accessed by operating an input means (e.g. push-buttons) until the correct memory address is shown, the display then being operated to enter a mode in which it

---

displays the contents of the selected memory location, which contents can then be altered.

The display could also be used to display the status of various parts of the circuitry of the coin  
5 handling apparatus.

Preferably, the control circuit includes a micro-processor.

An arrangement embodying the invention will now be described by way of example with reference to the accompanying drawings, in which:

Fig. 1 is a schematic diagram of the mechanical part of a coin handling apparatus in accordance with the invention;

Fig. 2 is a block diagram of the circuit of the coin handling apparatus;

Fig. 3 schematically shows an arrangement for accessing and altering the contents of a memory of the circuit shown in Fig. 2;

Fig. 4 schematically shows one of the coin storage containers of the apparatus; and

Figs. 5 and 6 are flow charts to describe some of the operations carried out by the apparatus.

Referring to Fig. 1, the coin handling apparatus 2 includes a coin validator 4 for receiving coins as indicated at 6. During the passage of the coins 6 along a path 8 in the validator 4, the validator provides signals indicating whether the coins are acceptable, and if so the denomination of the coins.

Acceptable coins then enter a coin separator 10, which has a number of gates (not shown) controlled by the circuitry of the apparatus for selectively diverting the coins from a

main path 12 into any of a number of further paths 14, 16 and 18, or allowing the coins to proceed along the path 12 to a path 20 leading to a cashbox. If the coins are unacceptable, instead of entering the separator 10 they are  
5 led straight to a reject slot via a path 30.

Each of the paths 14, 16 and 18 leads to a respective one of three coin containers 22, 24 and 26. Each of these containers is arranged to store a vertical stack of coins of a particular denomination.

10 A dispenser indicated schematically at 28 is operable to dispense coins from the containers when change is to be given by the apparatus.

The arrangement so far is quite conventional, and the details of particular structures suitable for using  
15 as various parts of the mechanism will therefore not be described in detail.

Referring to Fig. 2, the circuit of the present embodiment of the invention incorporates a microprocessor 50 connected to data and address buses 52 and 54. Although  
20 separate buses are shown, data and address signals could instead be multiplexed on a single bus. A bus for control signals could also be provided.

The microprocessor 50 is connected via the buses 52 and 54 to a read-only memory (ROM) 56 and a random  
25 access memory (RAM) 58. The ROM 56 stores the program

controlling the overall operation of the microprocessor 50, and the RAM 58 is used by the microprocessor 50 as a scratch-pad memory.

The microprocessor 50, the ROM 56 and the RAM 58 are, in the preferred embodiment, combined on a single integrated circuit.

The microprocessor 50 is also connected via the buses 52 and 54 to an EAROM 60. The EAROM 60 stores a variety of alterable parameters to be described in more detail later. The EAROM 60 may be of a type which inputs and outputs data in a serial fashion, in which case it may be connected to only a single data line, instead of the data bus 52.

The microprocessor 50 is also coupled via the buses 52 and 54 to input/output circuitry indicated at 62. The circuitry 62 includes a level sensor for each of the coin containers 22, 24 and 26, circuits for operating the dispenser 28 and the gates of the coin separator 10, the circuitry of the coin validator 4, a display visible to a user of the apparatus for displaying an accumulated credit value, and a further display and a set of switches to be described in connection with Fig. 3.

The input/output circuitry 62 also includes an interface between the control circuit of the apparatus and a vending machine to which it is connected.

In operation of the apparatus the microprocessor 50 successively tests the signals from the validator to

determine whether a coin has been inserted in the apparatus.

It also successively tests the signals from the switches

to be described with reference to Fig. 3 to determine

whether an operator desires to access the memory locations

5 in the EAROM 60. When a credit has been accumulated, the

microprocessor also tests signals from the vending machine

to determine whether a vending operation has been carried

out. In response to various signals received by the micro-

processor 50, various parts of the program stored in the

10 ROM 56 are carried out. The microprocessor is thus arranged

to operate and receive signals from the level sensors of the

coin containers 22, 24 and 26, and to control the gates in

the separator 10 in order to deliver the coins to the

required locations, and is also operable to cause appro-

15 priate information to be shown on the displays of the

apparatus and to deliver signals to the vending machine to

permit or prevent vending operations. The microprocessor

is also operable to control the dispenser to deliver

appropriate amounts of change.

20 The particular sequence of most of the operations

carried out by the microprocessor may be the same as those

determined by the hard-wired logic in previous apparatus.

A suitable program to be stored in the ROM 56 can therefore

be designed by anyone familiar with the art, and accordingly

25 only the operations carried out by the particularly relevant

parts of this program will be described.

Referring to Fig. 3, the control circuit is provided with a display 100 which can display four digits and a decimal point at any one of four locations each positioned after a respective digit. The circuit also  
5 has three pushbuttons, 102, 104 and 106, which can be operated to bring the display 100 into use.

In order to set the apparatus up for use, the pushbutton 102 (referred to as the "start" button) is operated. This is recognised by the microprocessor 50  
10 which then, in accordance with the program stored in the ROM 56, causes the display to read zero. The displayed value can then be incremented by successively pressing the pushbutton 106 (referred to as the "up" button), and decremented by successively pressing the pushbutton 104  
15 (referred to as the "down" button). In this way, the operator can bring the displayed number to any desired value within a predetermined range (above which the display returns to zero). Each of the displayable numbers corresponds to a particular memory location in the EAROM  
20 60.

Once a desired number has been reached, the operator again presses the set button 102, following which the display 100 displays the contents of the appropriate memory location. These contents can then be incremented

or decremented by using the up and down buttons 106 and 104, and the altered contents can be entered into the EAROM 60 by again pressing the set button 102. This operation of altering the memory contents can be terminated by pressing 5 the set button 102 twice in succession.

This method is used to set in the EAROM 60 a number of prices so that when the apparatus is used, the micro-processor 50 will recognise when sufficient credit has been accumulated by the insertion of coins to deliver the signals 10 which allow the vending machine to be operated.

By operating the buttons 102, 104 and 106 in a predetermined manner, the operator may gain access to further memory locations of the EAROM 60 (i.e. enter a "second access mode"). This could, for example, be done by 15 inserting a particular value in a particular memory location which is normally accessible. Then, when the display has been incremented to the highest normally available address, the microprocessor can be arranged to look at the memory location storing that particular value and, on noting that 20 the value is present, permit further incrementing of the display to further memory addresses.

This arrangement permits restricted access to certain memory locations. These memory locations can be used to store, for example:

- 25 (1) the maximum amount of change which the apparatus will dispense in a single operation. This

ensures that a user cannot build up excessive credit and then recover the credit by way of dispensed cash unless he has first operated the vending machine in order to reduce the credit to below the set value.

5           (2) A "discount" value, which corresponds to the amount of credit awarded in a discount operation.

          (3) A "discount" event number, which controls when a discount is to be awarded.

          (4) The coin denominations which are acceptable  
10 by the apparatus when it is in a state in which it may not be able to deliver change (i.e. when an "exact change" indication is given).

          (5) A value which determines whether the apparatus will operate in a single-vend or a multi-vend mode (as  
15 referred to above).

          (6) A value which determines whether, once a credit has been accumulated, a vending operation must be carried out before any change is given by the apparatus.

Other parameters affecting circuit operation can  
20 also be stored.

Still further memory locations can be accessed by operating the pushbuttons 102, 104 and 106 in a further predetermined manner (to achieve a "third access mode"). These further memory locations would normally have appropriate values stored in them on manufacture of the  
25 apparatus, and would not require alteration

on installation of the apparatus. However it is useful to provide a third level of access whereby an operator can inspect locations, and can also alter these if this ever becomes necessary, for example if a mechanism with  
5 which the circuit operates is altered.

The memory locations which are addressed at this third level of access store parameters relating to the way in which coins are handled by the apparatus, and further parameters relating to the values of the coins  
10 with which the apparatus is intended to be used.

The coin handling parameters include timing values which determine how long gates are opened or closed, gating parameters which determine which location each denomination of coin is directed to by the gates, and  
15 dispensing timing values which determine how long a dispensing mechanism is to be actuated for, and how long the necessary delay period is between the end of one dispensing operation and the beginning of a succeeding dispensing operation. These latter values will depend upon coin  
20 size and weight.

The coin value parameters include the relative values of the coins, and a scale factor whereby actual coin values can be calculated and displayed on the credit display of the apparatus.

Other parameters would not normally need to be changed except in special circumstances may also be stored at this third level of access. For example, there may be a memory location storing the minimum number of coins in a coin container below which the apparatus will provide an "exact change" indication to warn that the apparatus may not be able to deliver change.

There may also be a memory location to identify the type of coin validator being used with the apparatus.

10 The apparatus can be used with an optional audit or accountability system which keeps a record of the transactions carried out by the apparatus. One of the memory locations stores a value indicating whether or not such an audit system is in operation. This memory location is at 15 the third access level, so as to avoid unauthorised tampering with the contents of the location and thereby falsification of the accountability record. However, it is desirable to provide for situations in which an owner of the apparatus wishes to add an audit system to apparatus which has not 20 previously been provided with such a system. To enable this to be achieved simply, there is provided a further memory location at the second level of access into which the owner can insert a special code which causes the microprocessor to enter into the "audit location" at the third level of 25 access a code indicating the presence of an audit system. The microprocessor program is so arranged, however, that it is not possible to use the location at the second access

(41)

- 25 -

level to cause the storage, in the audit location, of a code signifying that no audit system is in use; the third level of access is required to achieve this.

The result of this is that there is a memory location which can be altered to store at least one particular code (indicating the presence of an audit system) at the second level of access, but can only be altered so as to store a different code (indicating the absence of an audit system) at the third level of access. This provides for simple and convenient modification when audit systems are being added, but prevents or makes very difficult tampering with the system to provide a false indication that there is no audit system present, which would result in the apparatus failing to record transactions.

Similar arrangements can be used for storing other parameters. It is of course also possible to have a corresponding arrangement at the first and second levels of access, rather than the second and third levels.

With the EAROM 60 storing the appropriate values, which have been entered on installation and/or manufacture, and the apparatus in a condition for use, an operator can use the display 100 and the pushbuttons 102, 104 and 106 to check on the operation of the apparatus. By operating the pushbuttons in a certain sequence, for example by pressing the down button 104 prior to pressing the set button 102, one can cause the microprocessor 50 to shift the display into a diagnostic mode. In this mode, the display

100 (and/or the external credit display of the apparatus) displays numbers dependent upon the status of various parts of the apparatus. For example, the apparatus can be arranged to indicate whether any of the coin containers 22, 24 and 5 26 is empty, whether a sensor in the separator is providing a signal indicating that the separator is jammed, etc.

It is known in conventional coin handling apparatuses to direct coins to coin containers such as those shown at 22, 24 and 26 in Fig. 1, and to dispense the coins from 10 the containers in a change dispensing operation. It is also known that the apparatus should recognise when the coins stored in each container reach a relatively low level, so that change may not be available and an indication that only the correct amount of cash should be inserted into the 15 machine is given. Furthermore, it is known to detect when the level of coins is above a predetermined maximum level, so that further coins of the same denomination are directed to the cashbox instead of the coin container.

However, in the past this has usually been achieved 20 by using two level sensors, one for detecting a low level of coins and the other for detecting a high level of coins. The present embodiment provides an arrangement which requires only one level sensor, but which nevertheless operates in the desired manner, as will be explained in the following.

Referring to Fig. 4, each coin container (only container 22 is illustrated in Fig. 4) has a single level sensor formed by a light source 150 and a light detector 152 mounted on opposite sides of the coin container. The level sensor can be operated at any desired time by the microprocessor sending a signal to illuminate the light source 150. This will produce an output from the light detector 152, which is delivered to the microprocessor 50, only if no coin blocks the light path between the source 10 and the detector.

The sensor is located fairly close to, but not at, the bottom of the coin container, although other positions could be used instead. The light detector 152 provides an output signal when the light source 150 is operated only if the number of coins in the container is equal to or less than a predetermined number, referred to herein by the mnemonic MTNUM. Any further coins will block the light from the source 150.

Each time the microprocessor causes a coin to be directed to the coin container, a coin count stored in the RAM 58 for that particular container is incremented. The coin count is decremented every time the microprocessor 50 causes a coin to be dispensed from the container.

14

- 28 -

The way in which the apparatus operates to keep a count of the coins in the containers will now be described with reference only to the coin container 22. The operation for the other coin containers is identical.

5           When the apparatus is switched on, the micro-processor 50 reads the sensor 150, 152 associated with the container. If the sensor is uncovered (i.e. if the number of coins is less than or equal to MTNUM) then the micro-processor stores, as the coin count for that container, the  
10 value zero. If on the other hand the sensor is covered, then the value stored as the coin count is a further pre-determined number referred to herein by the mnemonic FULNUM and corresponding to the desired maximum number of coins in the container.

15           The stored coin count is subsequently altered in accordance with coin dispensing and accepting operations.

          The detailed operation of the apparatus when it receives an acceptable coin of the denomination stored in the container 22 will be described with reference to the  
20 flow chart of Fig. 5.

          Following the recognition of an acceptable coin at step 500, the microprocessor determines whether the stored coin count (CC) is less than FULNUM at step 502. If not, i.e. if the count indicates that the maximum per-  
25 mitted number of coins is stored in the container, then at step 504 the microprocessor operates the gates to steer the coin to the cashbox. The microprocessor then proceeds,

as indicated at step 506, to carry out any subsequent operations such as incrementing a credit total, signalling the vending machine, etc.

Assuming that the coin count is less than FULNUM,  
5 then in step 508 the microprocessor operates the steering gates in the separator 10 in order to direct the coin to the coin container 22.

The microprocessor then, in step 510, reads the level sensor for the coin container 22. There then follows  
10 a delay period in step 512, wherein the microprocessor waits for a period set by the contents of a location in the EAROM 60 which is alterable at the third level of access. During this period the coin is passing through the separator 10. Then, at step 514, the level sensor of the container  
15 22 is read again.

At step 516 the gates directing the coin to the coin container 22 are closed.

At step 518 the microprocessor determines whether the level sensor of the container 22 is covered. This is  
20 done by "OR-ing" the results of the sensing operations at steps 510 and 514. In other words, if in either of these operations the sensor indicates that no coin is present, then the microprocessor assumes that the sensor is uncovered, i.e. that the number of stored coins is equal to or less  
25 than MTNUM.

The reason for carrying out the sensing operation twice, with an intervening pause, is to avoid the sensor

erroneously indicating that the coin level is greater than MTNUM. This could otherwise occur if a previously accepted coin was passing the level sensor at the time the sensor is read. The delay between the two readings is such that a  
5 coin passing the sensor at the time of the first reading would have settled in the container by the time the second reading is taken, and on the other hand any coin passing the level sensor at the time of the second reading would not have reached the sensor when the first reading was  
10 taken.

The time between the opening and closing of the gates sending the coin to the coin container may also be determined by alterable contents of an EAROM location, and may be selected in accordance with the physical properties  
15 of the coin.

The period of operation of the gates can be selected as described in British Patent Specification No. 1,582,691.

If, as a result of the sensing operations, it is discovered that the sensor is not covered, the microprocessor  
20 proceeds to step 520, in which the coin count is incremented by 1, and to step 506.

On the other hand, if the sensor is covered, then the microprocessor proceeds to step 522. Here the microprocessor determines whether the stored coin count is greater than MTNUM. As the sensor has been found to be covered, then the count should indeed be greater than MTNUM, and if it is then the microprocessor proceeds to step 520 to increment the count.

However if the coin count is less than or equal to MTNUM, the microprocessor proceeds to step 524. At this step, the microprocessor determines whether the coin count is equal to zero. Under normal circumstances, the coin count would be greater than zero, in which case the microprocessor proceeds to step 526, in which the coin count is set equal to a "coin-increasing correction" value of MTNUM plus 2. At this step therefore, the microprocessor corrects any errors in the coin count which may have resulted from the microprocessor, at switch-on, storing an initial coin count of zero when in fact several coins were already stored in the container. Thus, step 526 corrects any inaccurate counts which are smaller than the actual number of coins in the container.

If at step 524, if the microprocessor determines that the coin count is equal to zero, it proceeds to step 528. A

zero count should not in fact be obtained, because earlier deliveries of coins to the container in order to raise the level to a position at which the sensor is covered would have increased the coin count. However the zero count may in fact occur if the container has been manually filled, in which case the coin count would not have been incremented. In this situation the coin count would be completely wrong, and to deal with this problem the microprocessor, at step 528, stores the value FULNUM as the coin count. Any discrepancies between the value FULNUM and the actual number of coins in the container will be dealt with in subsequent operations to be described later.

After setting the coin count to the appropriate values, the program proceeds to step 506 and the subsequent operations of the apparatus.

The actual sequence of operations set out in Fig. 5, including the order in which the gates are opened and closed and the coin counts altered, can of course be modified.

The "coin-increasing correction" value MTNUM plus 2 which is stored in step 526 corresponds to the minimum value MTNUM plus 1 at which the sensor is covered, plus an extra 1 for the incoming coin which has just been accepted.

The operation of the apparatus when it is dispensing a coin from the container 22 will now be described with

reference to the flow chart of Fig. 6. Coins are of course dispensed only if the coin count is greater than zero. In an alternative arrangement, the apparatus could be arranged to dispense coins only if the coin count is 5 greater than another number, such as MTNUM.


... Firstly, a change calculation is carried out to determine how many coins of each of the stored denominations are to be dispensed in accordance with the total amount of change and the stored numbers of coins (i.e. the coin 10 counts). Then, for each of the coins to be dispensed, the following sequence is carried out.

At step 600, the coin is dispensed. Then at step 602, the coin count is decremented by 1. The sensor is read at step 604. In the dispensing operation, no problems 15 arise from coins moving past the sensor, and accordingly the sensor is read only once.

At step 606, the microprocessor decides whether the sensor is covered. If it is covered, no modification of the coin count is performed, and the program proceeds 20 to carry out any subsequent operations, such as calculating whether any further change is to be dispensed, altering the accumulated credit etc. as indicated at step 608.

It should be noted that, when the tube sensor is covered, the coin count may be greater than the actual 25 number of coins in the container, but it should not be less

than the actual number of coins. This is because the coin count is set to FULNUM on switch-on when the tube sensor is covered. If the coin count is equal to FULNUM, no further coins are directed to the coin container. This arrangement has the advantage that the actual number of coins stored in .....

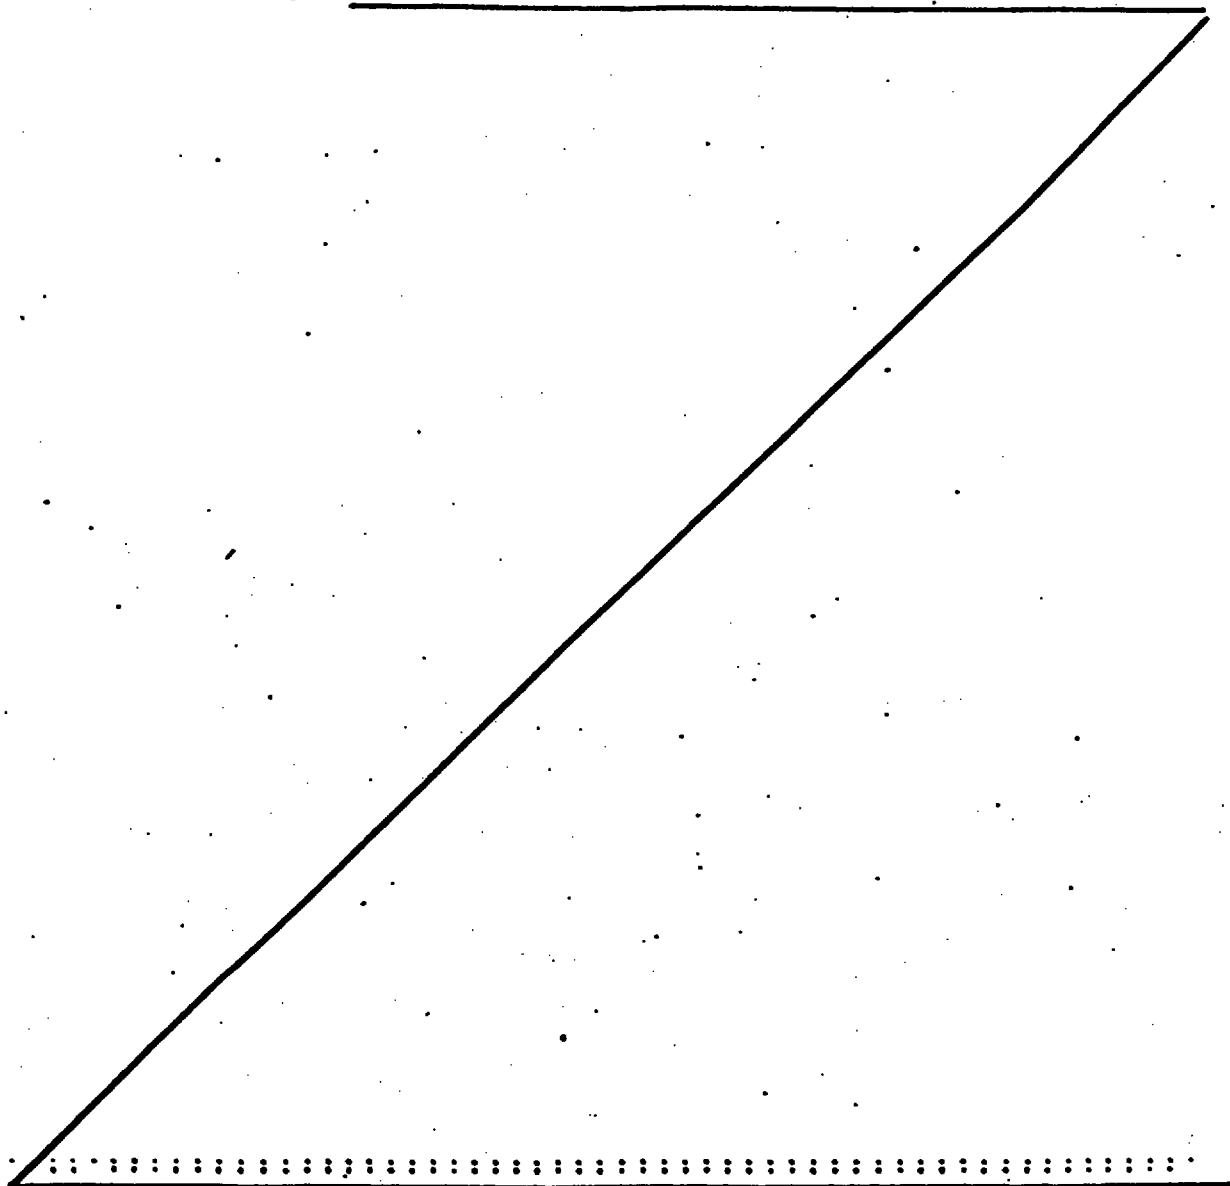

the container is never greater than FULNUM, and may in fact be kept at a value which is lower than FULNUM until the sensor becomes uncovered, in which case the count is corrected as described below. Thus, the actual amount of cash stored in the container is, for a while at least, kept lower than the maximum permitted value.

If, after the dispensing operation, the sensor is uncovered, the microprocessor proceeds from step 606 to step 610.

If the coin count is greater than MTNUM, then at step 612 the coin count is corrected by setting it equal to a "coin-decreasing correction" value of MTNUM. The program then proceeds to step 608.

If at step 610 the coin count is not greater than MTNUM, the program proceeds directly to step 608.

As a result of the operations described above, a single level sensor is used to enable the apparatus to keep a count of the coins in the container in order to determine whether coins are to be stored in the container or dispensed from the container. The program is designed so that any inaccuracies in the count are corrected when the level of the coins reaches that of the level sensor. If the initial count is too low because the level of coins was below the tube sensor, then the level

will not be allowed to drop lower, but otherwise coins may be stored in and dispensed from the container so that the level may eventually increase to that of the level sensor. On the other hand, if initially the tube sensor was covered 5 but the container was not full, then the level of coins may rise or fall but will not be permitted to rise any higher than the initial level.

Of course the tendency to approach the level of the sensor will depend on the cash inserted and dispensed 10 from the apparatus, so that in actual practice the level of the sensor may not be reached. However this would only occur when there is insufficient demand for change, or an insufficient number of acceptable coins coming into the apparatus. In either case inaccuracies in the coin count 15 are of no significance, because change is either not desired or cannot be given because of shortage of coins.

The values MTNUM and FULNUM are stored in the EAROM and can be altered at the third level of access referred to above. This enables the value FULNUM to be 20 altered to suit individual owners' requirements, and also to be varied for different coin denominations. It is sometimes found that large coins forming a high stack may detrimentally affect the performance of the dispenser. This can be avoided by reducing the value of FULNUM.

The value of MTNUM can be changed to suit different coin containers and sizes of coins, which will alter the number of coins necessary to reach the height of the level sensor.

5 When the third level of access to the EAROM 60 is reached, the microprocessor is arranged to transfer the coin counts for the various containers to the EAROM 60 so that these coin counts can be inspected.

Preferably, the microprocessor is arranged to read  
10 the sensors and store an additional count (either zero or FULNUM) not only when the power is switched on, but also when the pushbutton 102 is pressed. This allows an operator to fill the coin container manually, and then start a new coin count without turning off the power.

15 The level sensor of each of the containers can be positioned at any desired level. For example, the level sensor could be right at the top of the container. However it is preferred that the level sensor be at a relatively low position to avoid substantially underestimating the actual  
20 level of coins at initialisation, which would cause an "exact change only" indication to be given more often than necessary. The sensor could also be right at the bottom of the container, but it is preferably higher than this so as to provide the "exact change" indication as a warning prior  
25 to the container being completely emptied. It is generally

desirable that the level sensor be at or near the level of coins below which the "exact change" indication is given.

The various operations carried out by the control circuit throughout coin acceptance and dispensing stages, and the delivery of signals to the vending machine may, by way of example, correspond to the operations carried out by the circuitry of the Mentor 3000 system marketed by Mars Money Systems. By way of further example, the stored program may be arranged to cause the circuit to operate in accordance with the techniques described in British Patent Specification No. 2,006,501.

The coin handling apparatus of the invention may be used with machines other than vending machines, although it is particularly useful in circumstances in which change is to be dispensed. By way of example, the apparatus may be used in conjunction with pay telephones. Other examples are amusement and gaming machines, and change-giving machines.

In the illustrated embodiment, the microprocessor 50 carries out many different functions. Clearly, though, discrete circuitry could be used in place of a microprocessor, in which case many of the functions would be carried out by different, respective circuits.

55



CLAIMS:

1. Coin handling apparatus comprising at least one coin container, means for selectively directing coins either to a first path leading to the container or to a second path, means for selectively dispensing  
5 coins from the container, sensing means for indicating whether or not the number of coins in the container is greater than a first predetermined value, and a control means operable to keep an estimated running total of the number of coins to the container, to allow  
10 said dispensing means to dispense coins when said running total exceeds a second predetermined value, and to enable said directing means to direct coins to said first path when said running total is less than a third predetermined value, the control means  
15 being operable to perform a predetermined alteration of the running total in response to an alteration in the output of the sensing means caused by a variation in the number of coins stored in the container.



56

- 40 -

2. Apparatus as claimed in claim 1, wherein the control means is operable to set said running total equal to a "coin-decreasing correction" number in response to the sensing means indicating that the number of coins in the container is no longer greater than the first predetermined value as a result of the dispensing of a coin.

3. Apparatus as claimed in any preceding claim, wherein the control means is operable to set said running total equal to a "coin-increasing correction" number in response to the sensing means indicating that the number of coins in the container has become greater than said first predetermined value and the receipt of a further coin to be directed to that container.

4. Apparatus as claimed in any preceding claim, wherein said first, second and third predetermined values are all different.

5. Apparatus as claimed in any one of claims 1 to 3, wherein said first and second predetermined values are equal.



6. Apparatus as claimed in any preceding claim,  
wherein said third predetermined value is alterable.

7. Apparatus as claimed in any preceding claim,  
5 wherein said first predetermined value is alterable.

8. Apparatus as claimed in any preceding claim,  
wherein said second predetermined value is zero.

10 9. Apparatus as claimed in any preceding claim,  
wherein the control means is operable during an  
initialisation procedure to set the running total equal  
to an "empty" number, which is less than said first predet-  
ermined value, if the sensing means indicates that  
15 the number of coins in the container is not greater than  
said first predetermined value, and to set the running  
total equal to a "full" number, which is greater than  
said first predetermined value, if the sensing means  
indicates that the number of coins in the container is  
20 greater than said first predetermined value.

10. Apparatus as claimed in claim 9, wherein said  
"empty" number is equal to said first predetermined value.



58

- 42 -

11. Apparatus as claimed in claim 9 or claim 10, wherein said "full" number is equal to said third predetermined value.

5           12. Apparatus as claimed in any preceding claim, wherein said control means is operable to generate a signal indicative of a low level of change when the running total is not greater than a "low level" number.

10           13. Apparatus as claimed in claim 12, wherein said "low level" number is equal to said first predetermined value.

14. Apparatus as claimed in claim 12 or 13,  
15 wherein said "low level" number is alterable.

15. Apparatus as claimed in any preceding claim, wherein said sensing means is operable to indicate that the number of coins in the container is  
20 greater than said first predetermined value only if a sensor for detecting a coin at a predetermined position in the container provides an output indicating the presence of a coin both before and after a predetermined delay period.



16. Apparatus as claimed in any preceding claim,  
including a plurality of containers each arranged  
to receive and store a respective denomination of  
coin, said control means being operable to keep respec-  
5 tive running totals of the coins in said containers.

17. Apparatus as claimed in any preceding claim,  
including an addressable memory storing parameters  
determining how said control means operates, user-  
10 operable means being provided for a user to access and  
alter the contents of the memory.

18. Apparatus as claimed in claim 17, wherein  
the memory has some of its contents accessible by  
15 operating the user-operable means in a first manner  
so as to put the apparatus in a first access mode,  
and other contents which are inaccessible in said  
first access mode and which are accessible in a second  
access mode requiring a different manner of operation  
20 of said user-operable means.

19. Apparatus as claimed in claim 18, wherein  
said memory includes a location the contents of  
which can be altered to at least one predetermined number



60

- 44 -

by operating said user-operable means  
in one of said access modes, but which can be altered  
to at least one different predetermined number only by  
operating said user-operable means in a different  
5 access mode.

20. Apparatus as claimed in claim 18 or 19,  
wherein the memory has further contents which can  
be accessed in a third access mode by operating the  
10 user-operable means in a third manner.

21. Apparatus as claimed in any one of claims  
17 to 20, wherein the apparatus is operable to receive  
different types of coins and to direct them along  
15 different paths, said memory storing alter-  
able data determining the respective paths along which the  
different types of coins are to be directed.

22. Apparatus as claimed in any one of claims  
20 17 to 21, including a plurality of gates which are  
selectively operable by the control means to direct  
the items to different locations, and wherein the  
memory stores parameters determining the times for  
which the respective gates are operated.

6



- 45 -

23. Apparatus as claimed in any one of claims 17 to 22, wherein the memory stores parameters indicative of the values of respective coins.

5           24. Apparatus as claimed in any one of claims 17 to 23, wherein the control means is operable to increment a credit count in response to a signal indicating that the apparatus has received a genuine coin.

10

25. Apparatus as claimed in claim 24, for use in a vending machine operable to dispense at least one product, wherein the memory stores information determining how much the credit count has to be incremented before said one product will be dispensed.

15

26. Apparatus as claimed in claim 24 or 25, wherein said control means is operable additionally to increment said credit count without determining that a genuine coin has been received.

20

27. Apparatus as claimed in claim 26, wherein said memory stores a parameter determining when said additional incrementing is to take place.



62

- 46 -

28. Apparatus as claimed in any one of claims 17 to 27, wherein said memory is operable to retain its contents on interruption of a main power supply of the apparatus.

5

29. Apparatus as claimed in claim 28, wherein said memory is an electrically alterable read-only memory.

10

30. Apparatus as claimed in claim 28, wherein the memory has an auxiliary power supply for allowing the memory to retain its contents on interruption of the main power supply.

15

31. Change-giving apparatus having a coin validator for receiving and testing coins, and coin handling apparatus as claimed in any preceding claim for receiving from the validator coins which have been determined to be genuine, and for dispensing change from the container of the coin handling apparatus.

20

32. A vending machine having change-giving apparatus as claimed in claim 31.

---