



(43) International Publication Date
3 January 2014 (03.01.2014)

- (51) International Patent Classification:
E21B 43/17 (2006.01) *E21B 43/20* (2006.01)
- (21) International Application Number:
PCT/US2012/044824
- (22) International Filing Date:
29 June 2012 (29.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HOLDERMAN, Luke, William** [US/US]; 3709 Campstone Drive, Plano, Texas 75023 (US). **HAILEY, JR., Travis, Thomas** [US/US]; 3902 Lyndhurst Place, Sugar Land, Texas 77479 (US). **SIMONDS, Floyd, Randolph** [US/US]; 8710 Arbor Park Drive, Dallas, Texas 75243 (US).
- (74) Agents: **PRATT, John, S.** et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ISOLATION ASSEMBLY FOR INFLOW CONTROL DEVICE

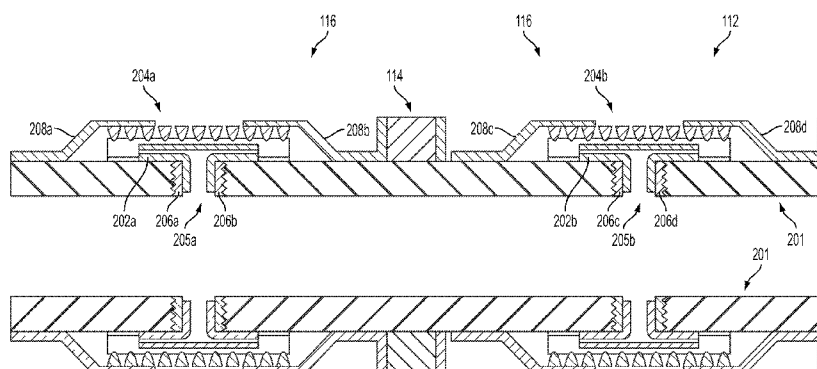


FIG. 2

(57) **Abstract:** Certain aspects and features of the present invention are directed to an isolation assembly that can be disposed in a wellbore through a fluid-producing formation. The isolation assembly can include one joint of a tubing section, at least two inflow control devices, and an isolation element. The joint of the tubing section can include at least two ports. Each inflow control device can be coupled to the tubing section at a respective port. The isolation element can be positioned between the inflow control devices. The isolation element can be configured to fluidly isolate the ports from each other.

