



- (51) International Patent Classification:
B63B 35/00 (2006.01) *F03D 1/00* (2006.01)
- (21) International Application Number:
PCT/EP2012/058474
- (22) International Filing Date:
8 May 2012 (08.05.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1109123.8 27 May 2011 (27.05.2011) GB
- (72) Inventors; and
- (71) Applicants : STEVEN, Iain [GB/CN]; 34 Hazelwood Road, Bridge of Weir Renfrewshire PA11 3DT (GB). LINKE, Terence [GB/BG]; 6 Greenwood Close, Sketty, Swansea South Wales SA29AY (GB). DAVIES, John [GB/CN]; 1 MacLeod Road, Balloch, Inverness Highland IV2 7JW (GB).
- (74) Agents: ROBSON, Aidan et al.; Reddie & Grose LLP, 16 Theobalds Road, London Greater London WC1X 8PL (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A VESSEL AND A METHOD FOR INSTALLING OR REPAIRING AN OFFSHORE STRUCTURE

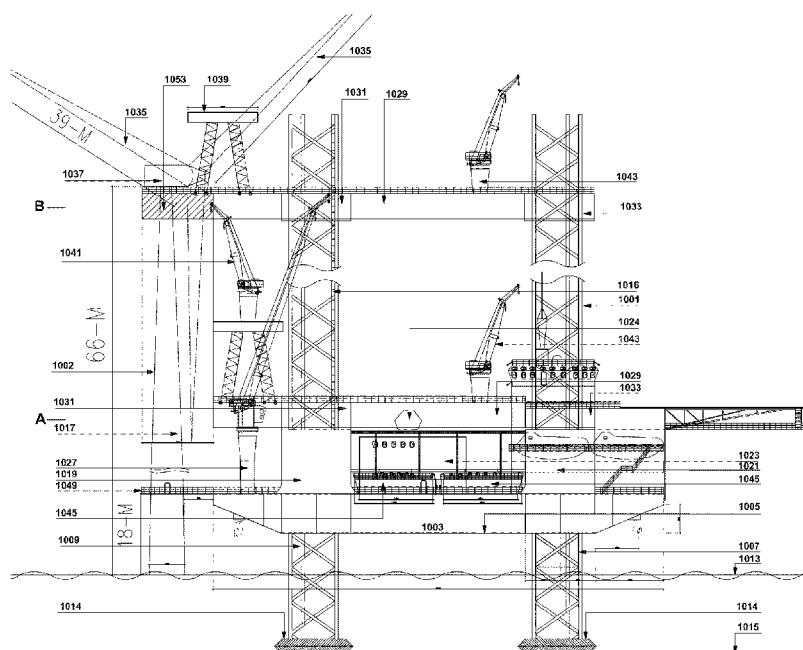

(57) Abstract: A vessel comprising a primary platform (1003) moveably connected to a secondary platform (1029) by one or more legs (1007, 1009, 1011, 1013) is disclosed. The primary and secondary platform (1003, 1029) are moveable along the legs, wherein the secondary platform is moveable independently from the primary platform. The invention has particular application in the repair maintenance, and construction of wind turbines.