

(2006024525)

12.04.06



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/062317 A1

(51) International Patent Classification⁷: **H01G 2/06**,
4/32, 9/00

(21) International Application Number:
PCT/US2004/039239

(22) International Filing Date:
24 November 2004 (24.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/737,467 15 December 2003 (15.12.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STEYSKAL, Aaron** [US/US]; 8546 North Polk Avenue, Portland, OR 97203 (US). **LIU, Tao** [US/US]; 6011 75th Avenue Court West, University Place, WA 98467 (US). **SCHIVELEY, Steve** [US/US]; 1422 Primrose Lane, Forest Grove, OR

97116 (US). **CHU, Peir** [—/US]; 15548 NW Trakehner Way, Portland, OR 97229 (US). **GREENWOOD, Mike** [US/US]; 19427 South Daybreak Court, Oregon City, OR 97045 (US).


(74) Agents: **VINCENT, Lester, J.** et al.; Blakely Sokoloff Taylor & Zafman, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, CA 90025 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: WOUND CAPACITOR WITH BALL-AND-LEAD CONFIGURATION

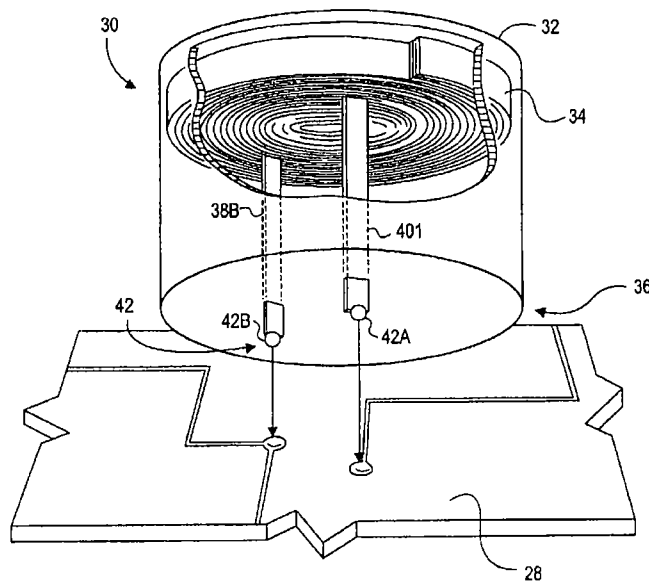

(57) Abstract: A wound capacitor has a lead configuration that enables enhanced control over equivalent series resistance (ESR) and equivalent series inductance (ESL). The capacitor has a case and a wound foil disposed within the case. A ball-and-lead configuration is coupled to the foil and extends from the case.

WO 2005/062317 A1



ACTION

WO 2005/062317 A1

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*