



(51) International Patent Classification:

F02D 19/08 (2006.01) *F02M 25/12* (2006.01)
F02D 41/26 (2006.01) *F02D 41/00* (2006.01)
F02D 41/38 (2006.01)

[US/US]; 2025 West 83rd Street, Bloomington, Minnesota 55431 (US). **TUZINKEWICH, Jason D.** [US/US]; 5657 27th Avenue South, Minneapolis, Minnesota 55417 (US).

(21) International Application Number:

PCT/US2010/048176

(74) Agents: **GRAZIANO, James M.** et al.; Patton Boggs LLP, 1801 California Street, Suite 4900, Denver, Colorado 80202 (US).

(22) International Filing Date:

8 September 2010 (08.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/241,783 11 September 2009 (11.09.2009) US
 12/877,026 7 September 2010 (07.09.2010) US

(71) Applicant (for all designated States except US): **GEO FIREWALL SÀRL** [LU/LU]; 67 rue Ermesinde, L-1469 Luxembourg (LU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **DEE, John** [AU/AU]; 62 Wilson Street, Cheltenham, Victoria 3192 (AU). **FULTON, Steve** [AU/AU]; 16 Caversham Drive, Mornington, Victoria 3931 (AU). **KUJAWSKI, Dan**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: SYSTEM TO DYNAMICALLY VARY THE VOLUME OF PRODUCT GAS INTRODUCED INTO A HYDRO-CARBON COMBUSTION PROCESS

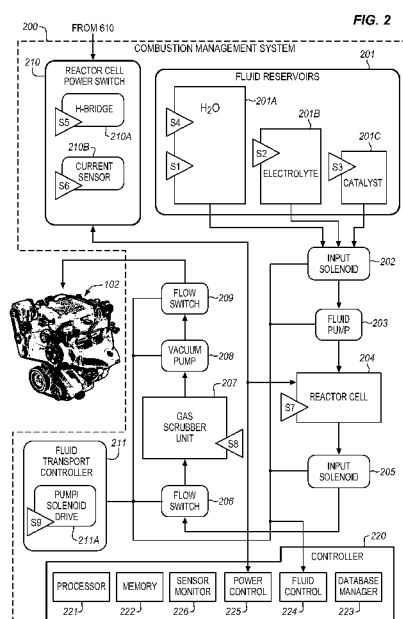

(57) Abstract: The Combustion Management System models each hydrocarbon combustion application and supplies a product gas, comprising a dynamic mixture of nascent hydrogen (H) and oxygen (O), to the internal combustion engine to propagate the formation of hydroxide radicals (OH) and thereby to improve the level of completion of the hydrocarbon combustion reaction. The Combustion Management System provides product gas volumetric requirement information; and takes into account the engine style, primary torque requests, and hydrocarbon fuel consumption information to develop an operating system specific application that produces consistent measurable results.



LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*