

11/06/03

2003033818

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau

\*162162\*

(43) International Publication Date  
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number  
WO 02/055792 A1(51) International Patent Classification<sup>7</sup>: E02D 7/00

(21) International Application Number: PCT/US01/44494

(22) International Filing Date:  
28 November 2001 (28.11.2001)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
60/253,684 28 November 2000 (28.11.2000) US  
09/724,697 28 November 2000 (28.11.2000) US

(71) Applicant and

(72) Inventor: HUBBARD, Melvin, L. [US/US]; 28286  
Greenwald Avenue, Perris, CA 92570 (US).(74) Agent: WIECZOREK, Mark, D.; P.O. Box 70072, San  
Diego, CA 92167 (US).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR VIBRATORY KINETIC ENERGY GENERATION AND APPLICATION THEREOF

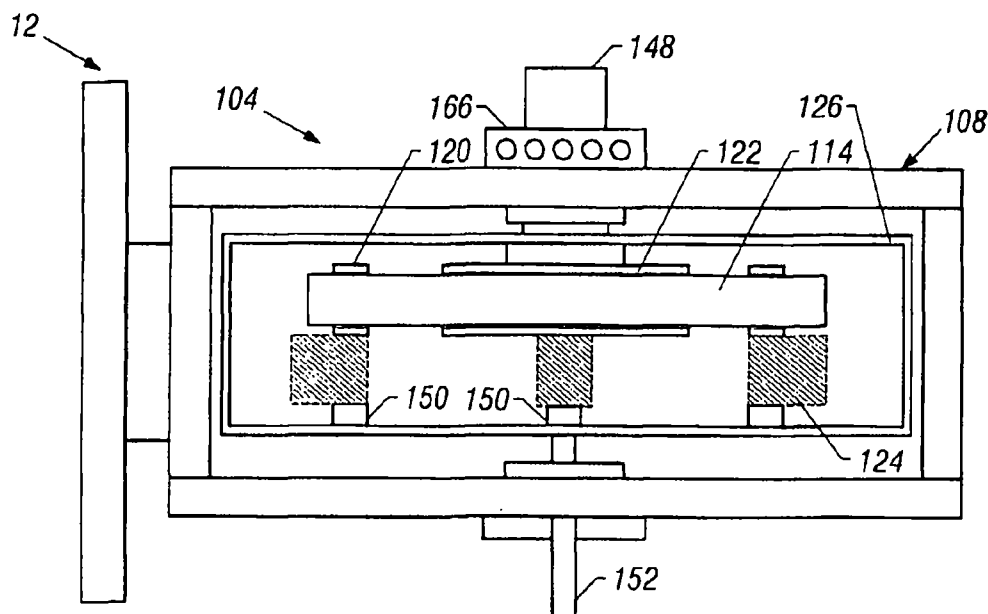

(57) Abstract: A device and method for performing a task employing vibration of a tool. The device includes a housing (126) containing at least one off-center weight (124), and the off-center weight is coupled to a motor (148) and configured to rotate or revolve to vibrate the housing. The housing further includes a device mount (112) to allow the housing to be removably coupled to a mount on a vehicle. A tool is removably coupled to the housing via a socket in the housing to perform a task. The housing may be coupled to a plurality of types of vehicles and is such that a plurality of types of tools may be coupled to the housing.

WO 02/055792 A1



\*ACTION\*

## WO 02/055792 A1

---

**(48) Date of publication of this corrected version:**

17 April 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(15) Information about Correction:**

see PCT Gazette No. 16/2003 of 17 April 2003, Section II