




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E04H 15/46, E04B 1/19, 1/32, 1/344	A1	(11) International Publication Number: WO 96/41928 (43) International Publication Date: 27 December 1996 (27.12.96)
(21) International Application Number: PCT/AU96/00329 (22) International Filing Date: 3 June 1996 (03.06.96) (30) Priority Data: 21623/95 9 June 1995 (09.06.95) AU (71)(72) Applicant and Inventor: GREY, Stephen [AU/AU]; Unit 1/54 Ghegwyn Street, Botany, NSW 2133 (AU). (74) Agent: YOUNG, Philip, Claude; Wilson & Young, 225 Lawrence Street, Alexandria, NSW 2015 (AU).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: COLLAPSIBLE DISPLAY FRAMEWORK FOR INDOOR OR OUTDOOR USE

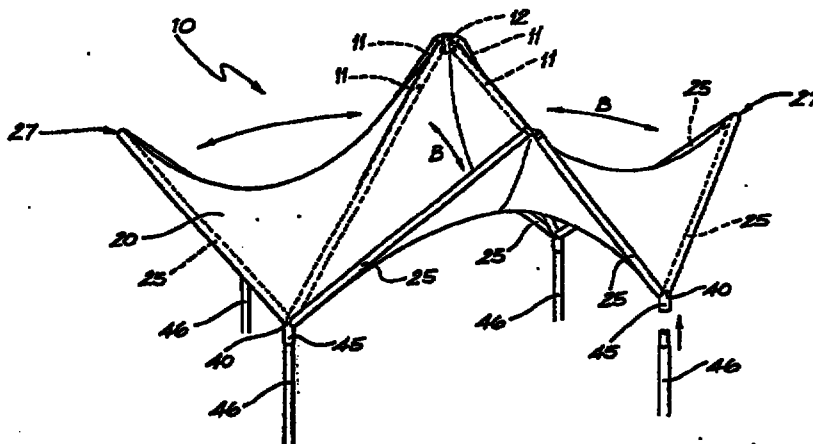

(57) Abstract

A collapsible support structure (10) for a cover means (20), the structure comprising at least three apex poles (11) with first ends pivotally connected together so that in use the poles (11) are moveable between a raised configuration in which the second opposite ends extend outwardly in different directions to create a pyramid shaped frame and a collapsed configuration. The structure also includes pairs of perimeter poles (25) with each pair forming an inverted V between the opposite ends of adjacent apex poles (11) when in the raised configuration and bracket means (16) comprising struts (18) which extend between and are pivotally attached to respective apex poles (11) intermediate their ends and a central flange means (12) whereby the first connected ends of the apex poles (11) and the central flange means (12) may be pushed toward each other to obtain the raised configuration or pushed apart to obtain the collapsed configuration and the apex poles (11) and perimeter poles (25) are pivotally connected so as to fold together into close substantially parallel positions when in the collapsed configuration, wherein the cover means (20) is attached to the support (10) by hook and loop means (60) and the connected perimeter and apex poles are secured in an open position by a releasably operated telescopic brace means (41) pivotally connected therebetween.