

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)


PCT

(10) International Publication Number
WO 03/059454 A1

- (51) International Patent Classification⁷: **A62C 35/02**, 35/08
- (74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FIN-00100 Helsinki (FI).
- (21) International Application Number: PCT/FI03/00029
- (22) International Filing Date: 16 January 2003 (16.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20020090 17 January 2002 (17.01.2002) FI
- (71) Applicant (for all designated States except US): **MAR-IOFF CORPORATION OY** [FI/FI]; P.O.BOX 25, Hakamäenkuja 4, FIN-01510 Vantaa (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI). **METZGER, Harry** [FI/FI]; Aleksis Kiven tie 49, FIN-04200 Kerava (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: VALVE ELEMENT

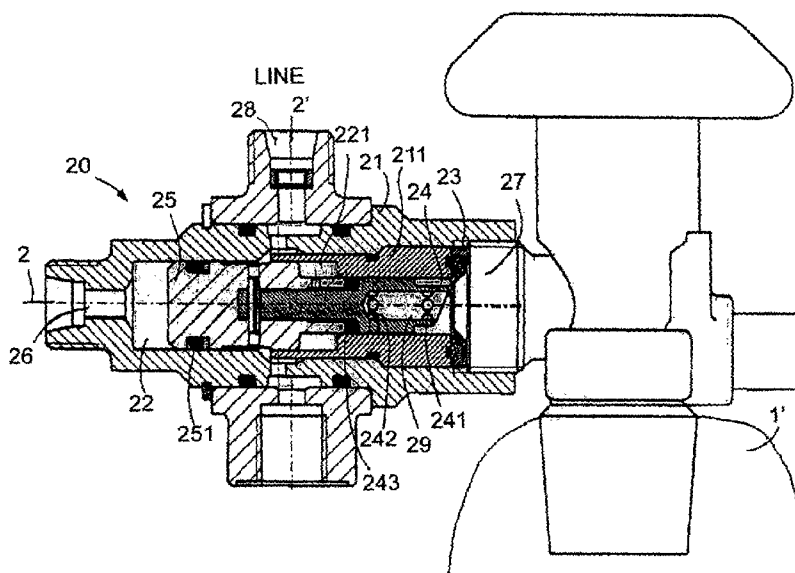

(57) Abstract: A valve element (20), comprising a frame (21), at least one first inlet (26), at least one second inlet (27) and at least one outlet (28). The valve element consists of a combination comprising at least one burst disk (23) or equivalent, which, when unbroken, closes a passage from the second inlet (27) at least to the outlet (28), and a piston element (25) comprising a piercing element (24) or the like for piercing the burst disk, said piston element being arranged to be movable between at least two positions when the burst disk has been pierced, in which first position the passage from the second inlet (27) to the outlet (28) is closed while in a second position the passage from the second inlet (27) to the outlet (28) is open, to which second position the piston element is moved after the pressure difference between the second inlet and the first inlet has reached a predetermined value.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.