

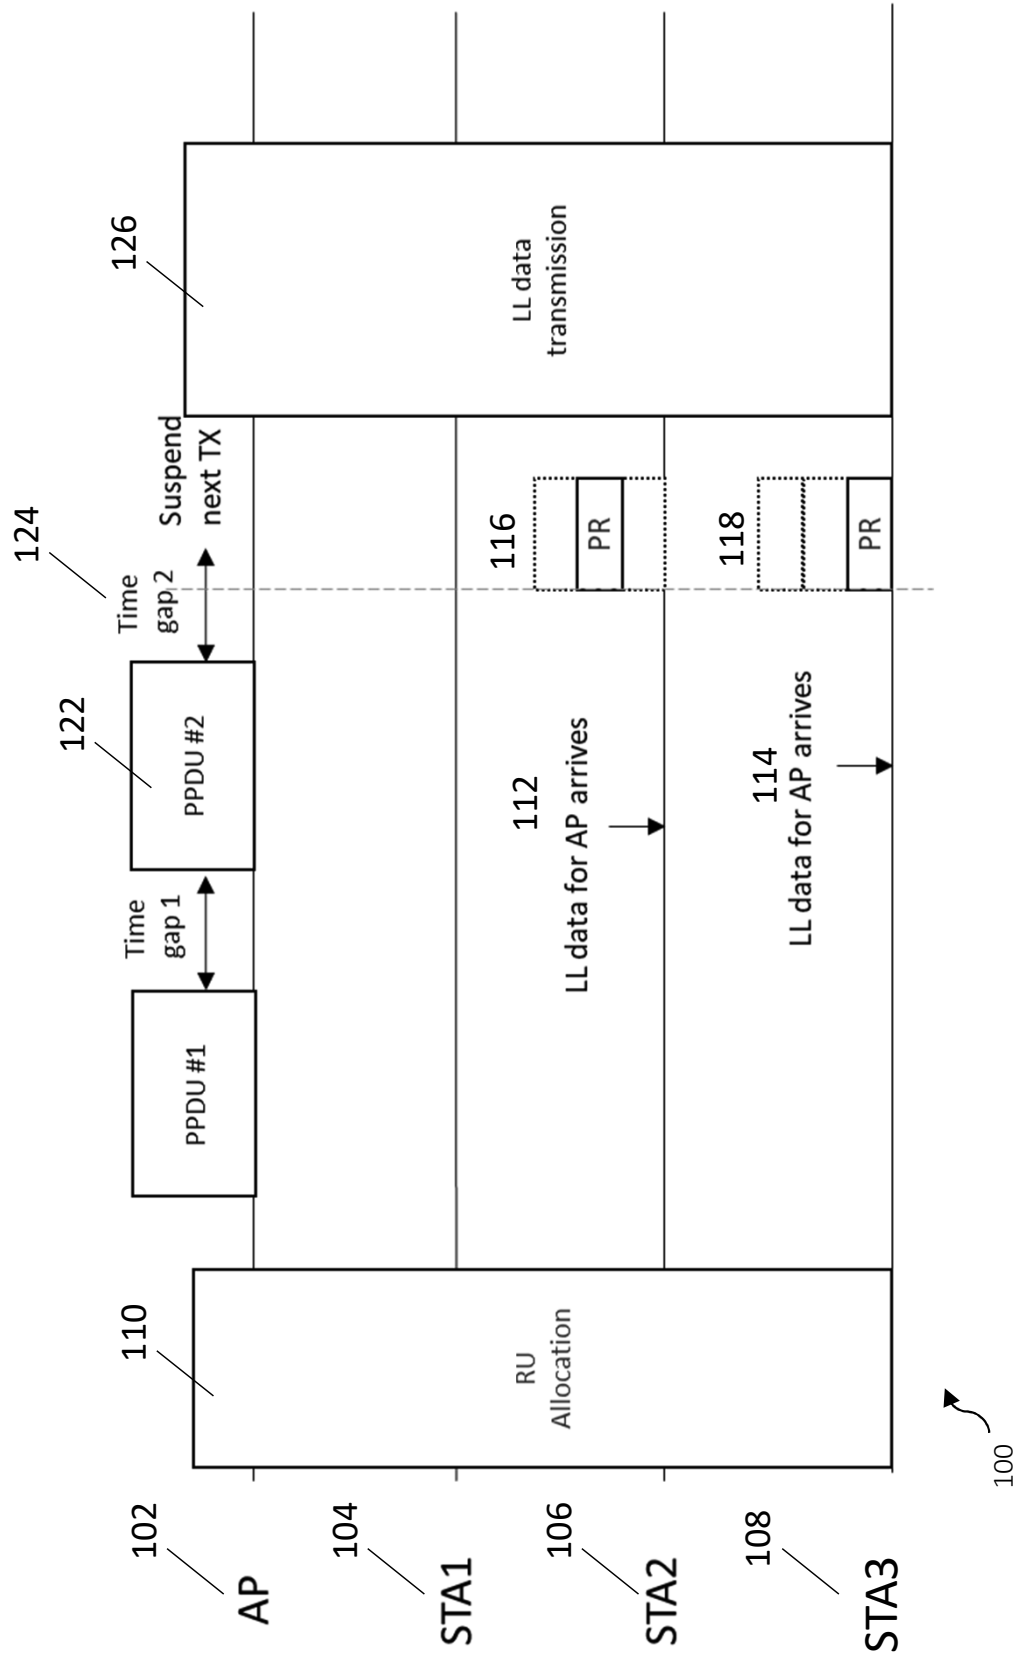


Figure 1

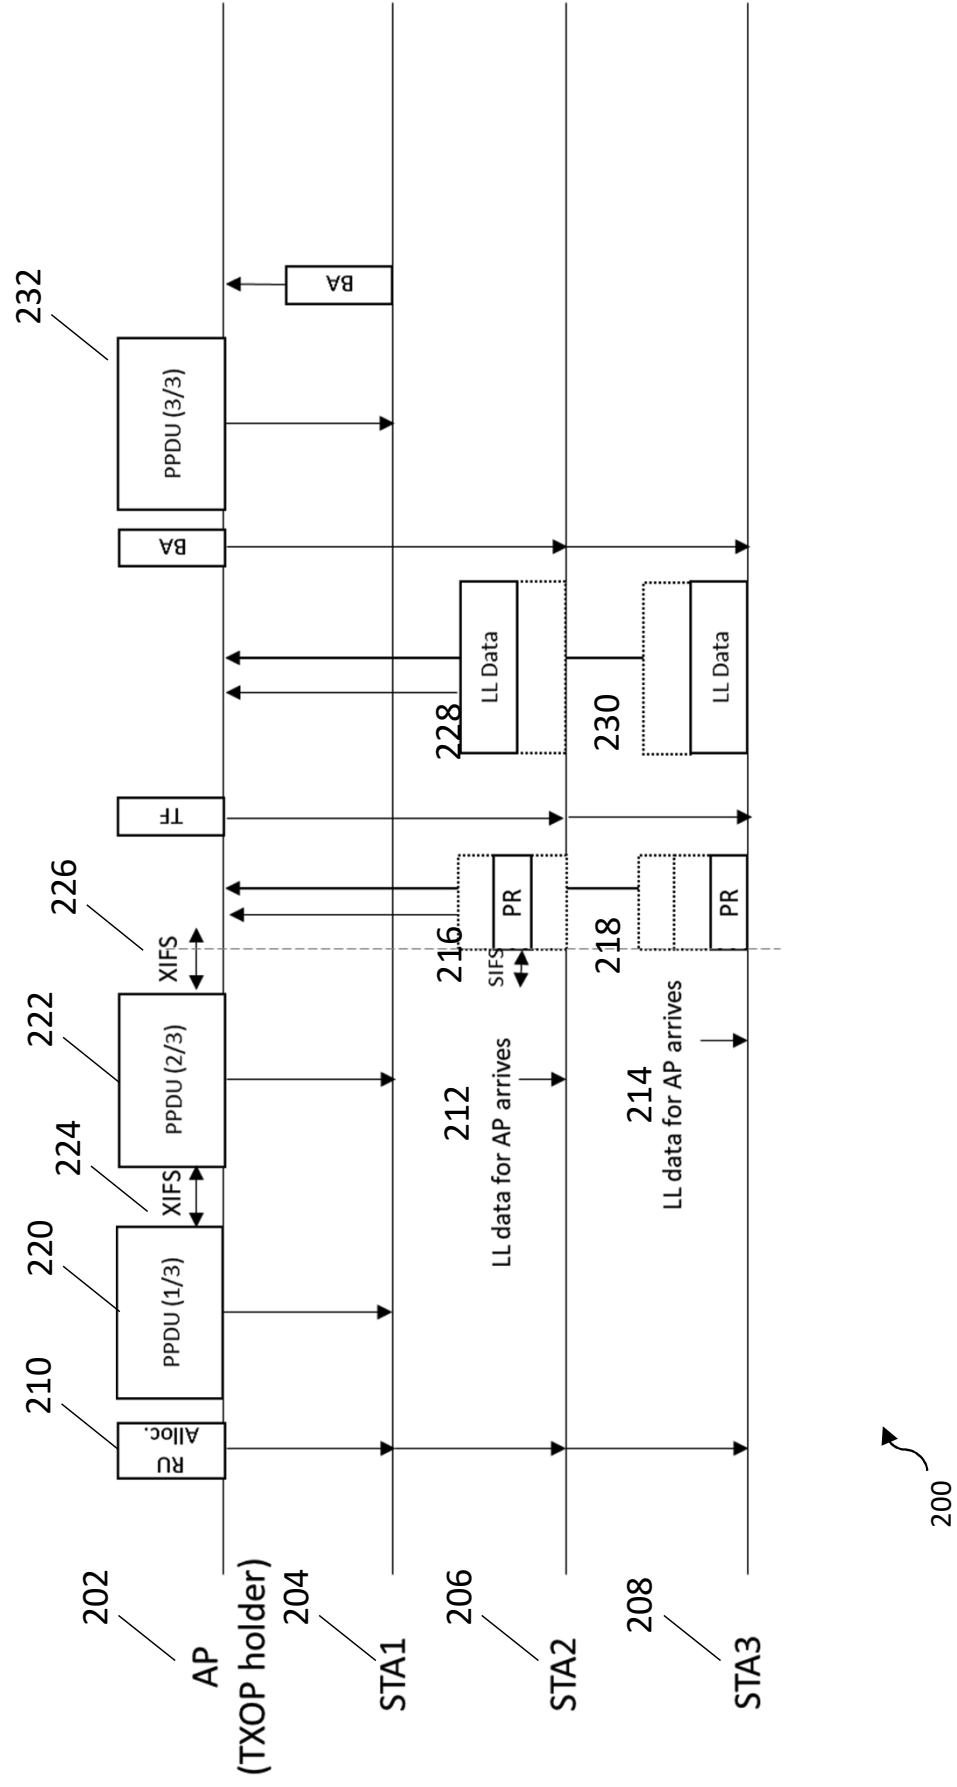


Figure 2

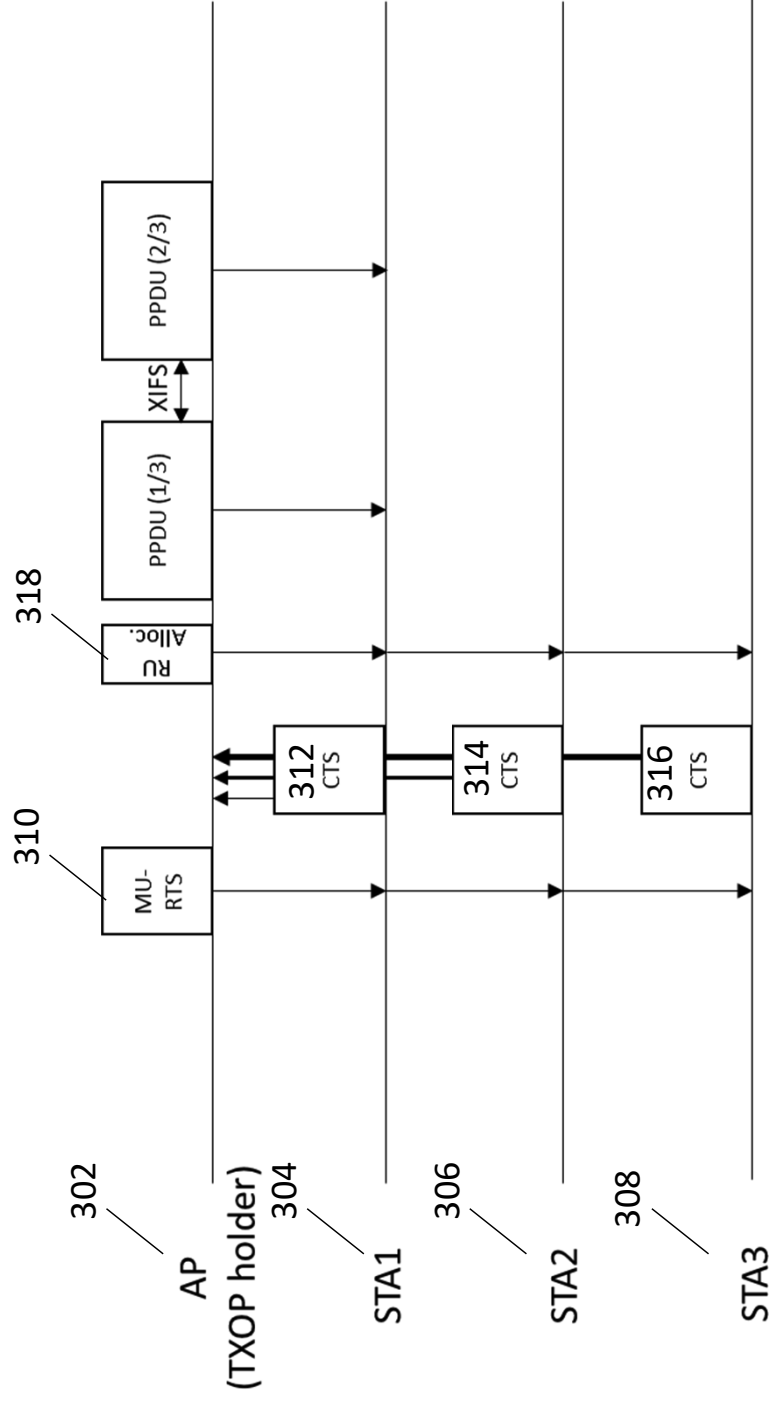


Figure 3



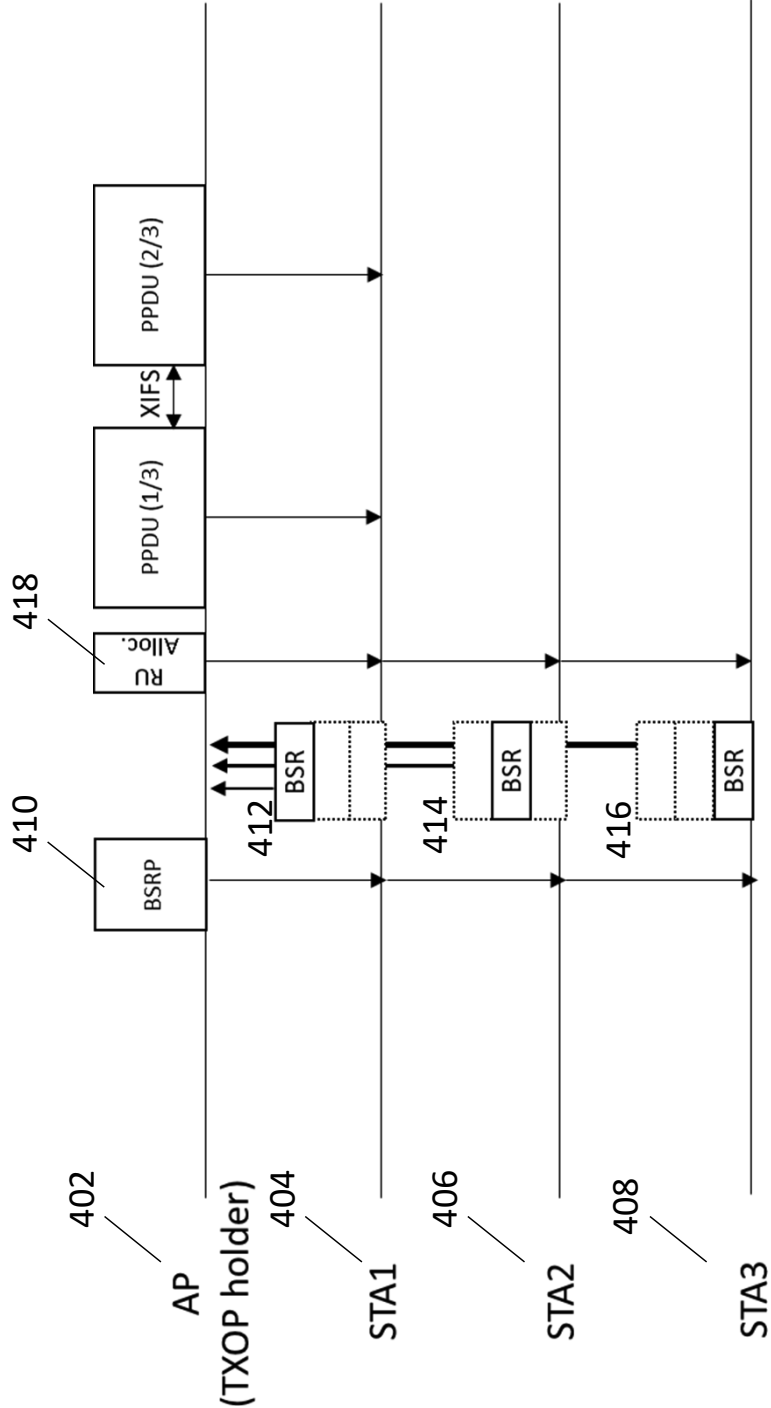


Figure 4

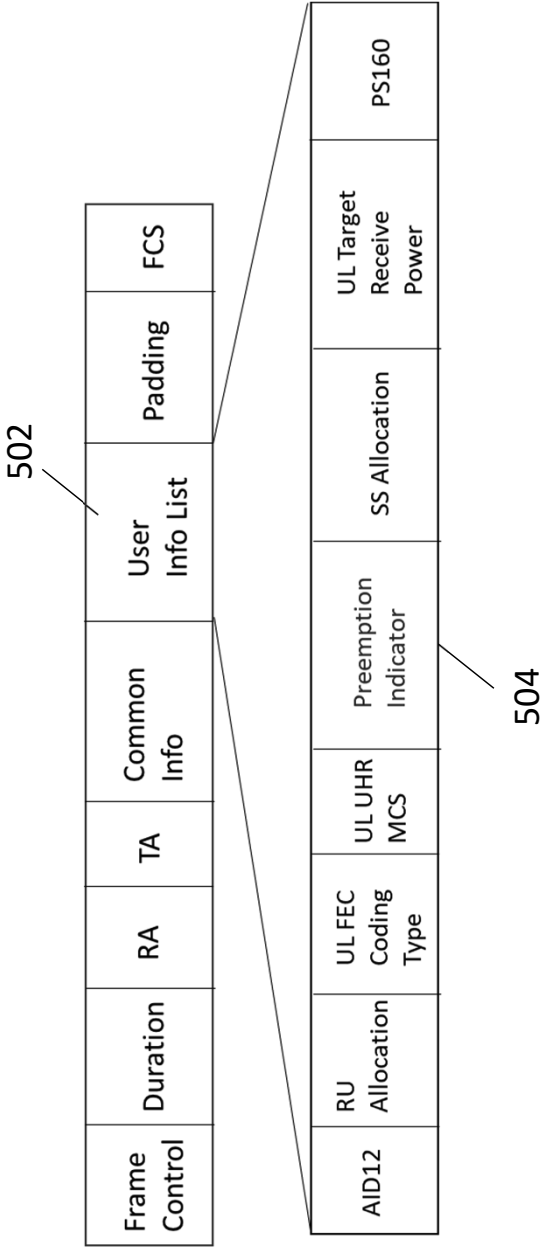

500

Figure 5

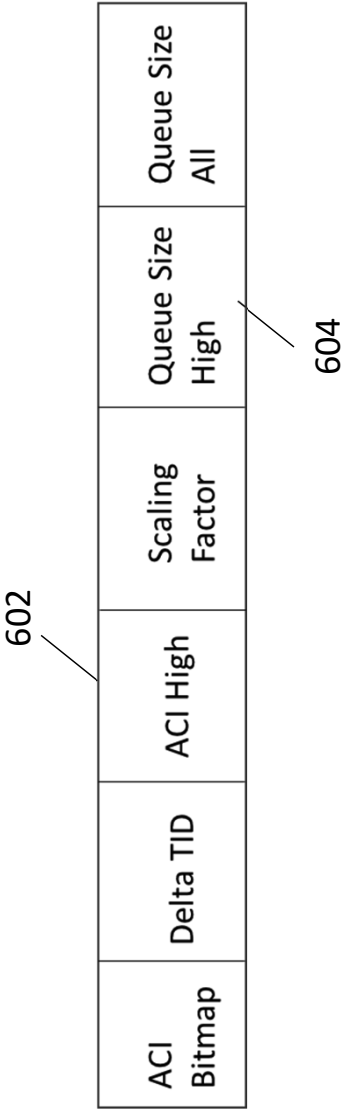

600

Figure 6


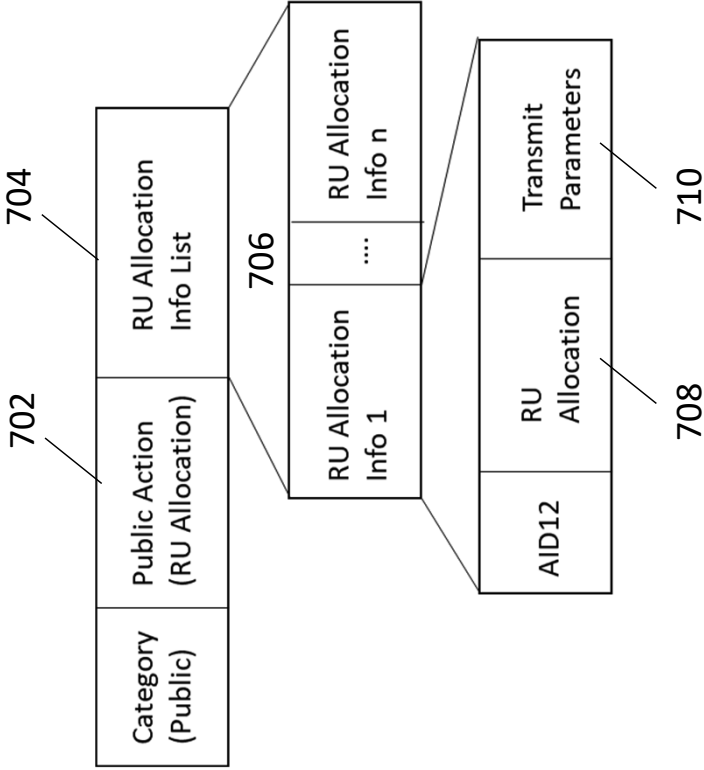


Figure 7

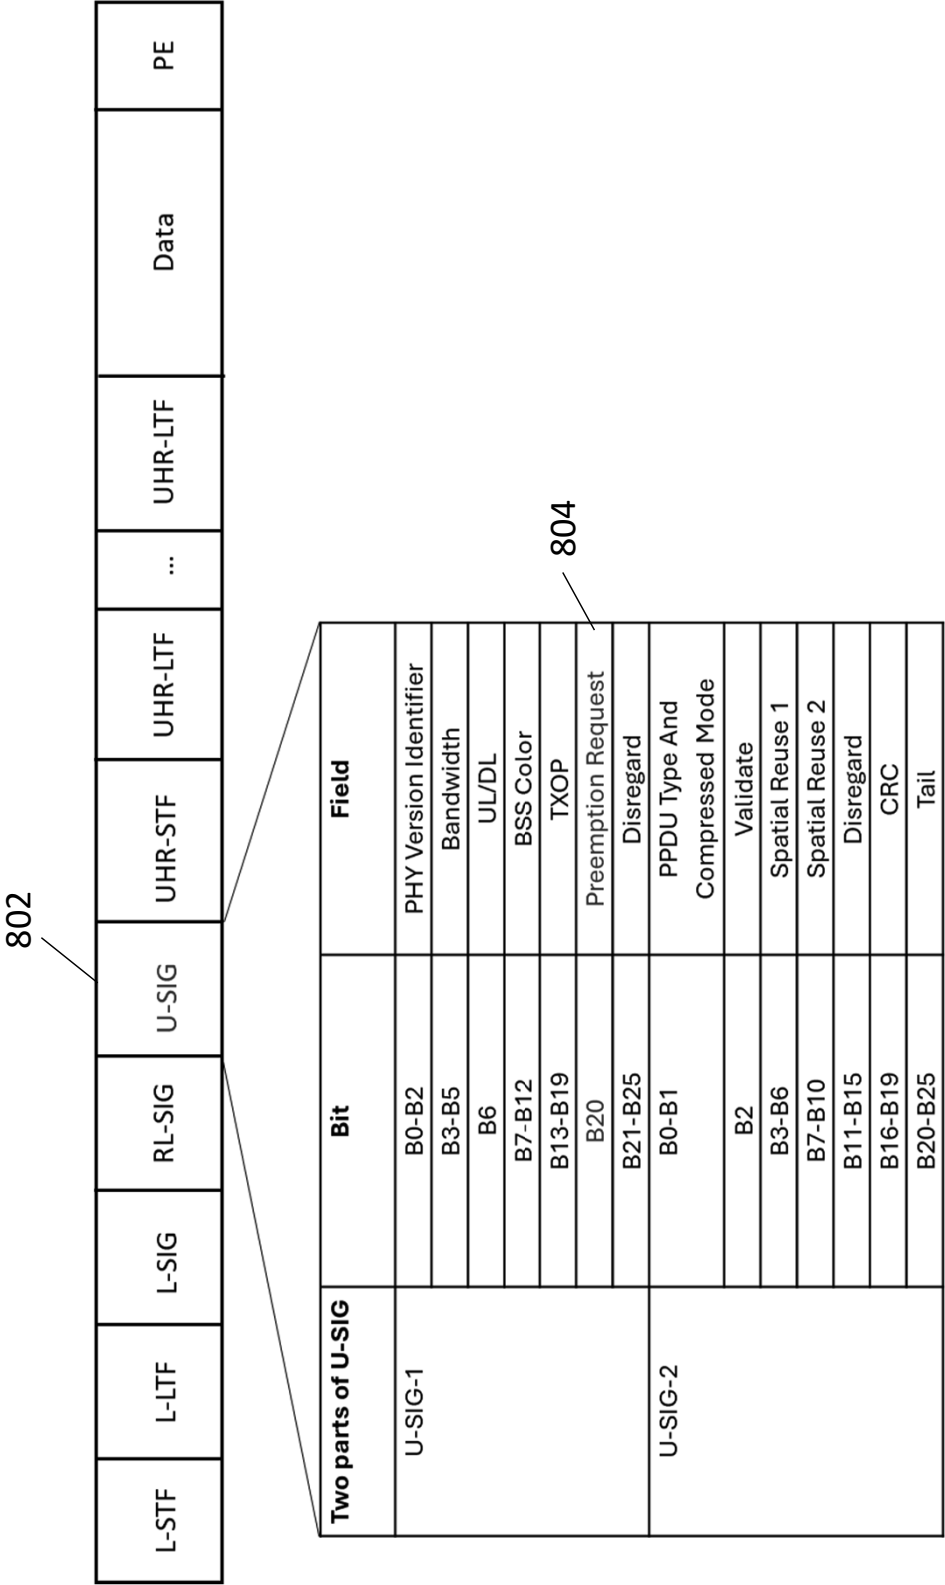

800

Figure 8

ACI Bitmap	Delta TID	ACI High	Scaling Factor	Queue Size High	Queue Size All
---------------	--------------	----------	-------------------	--------------------	-------------------

900

Figure 9

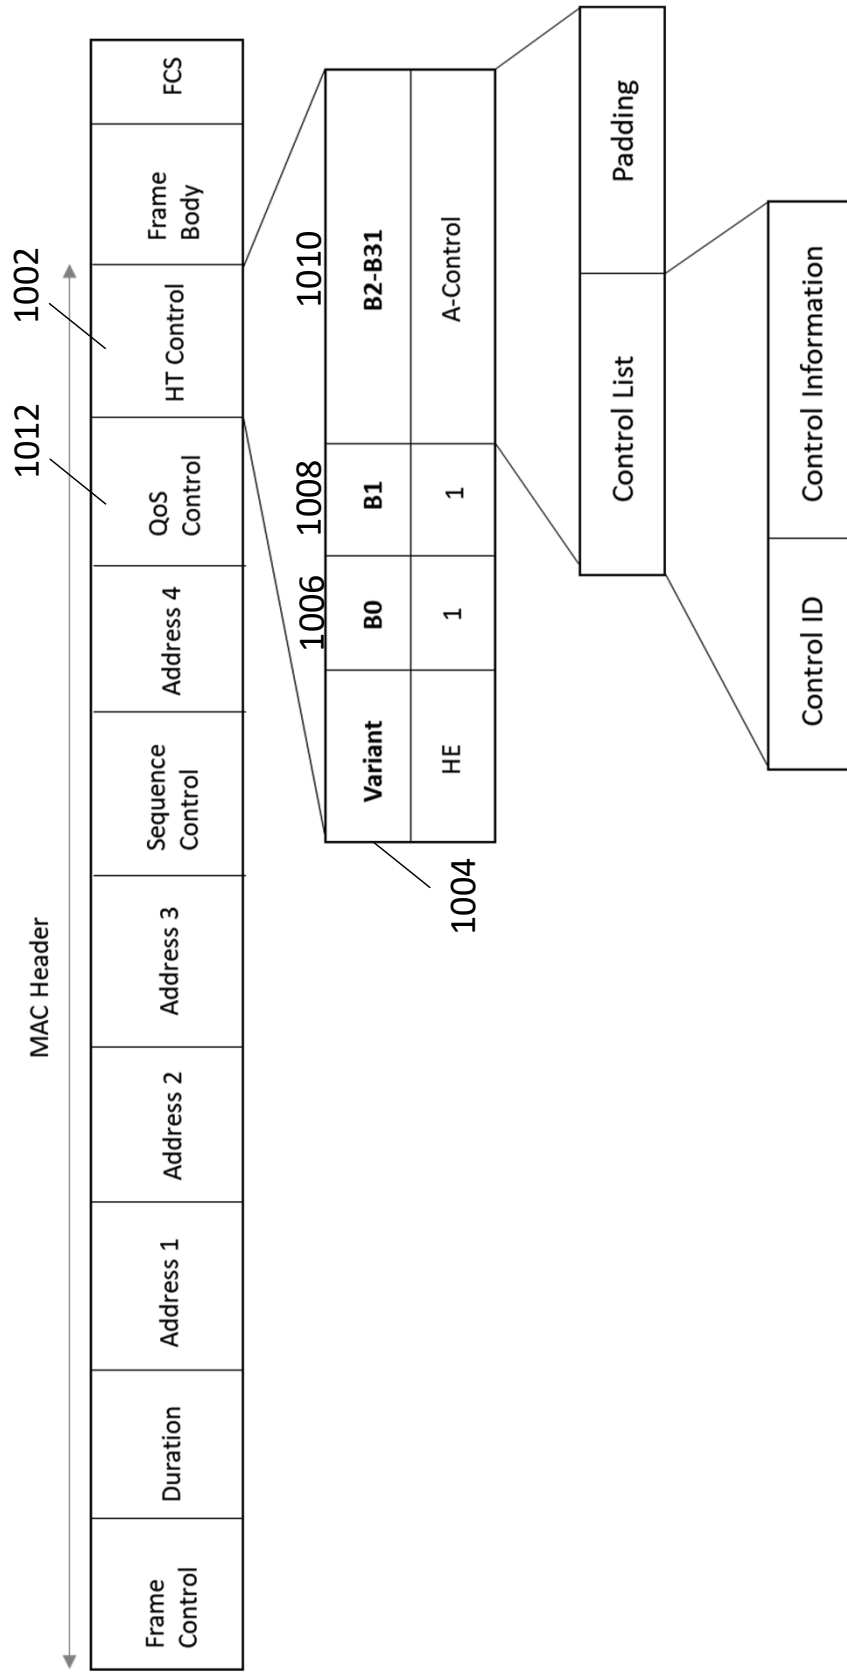



Figure 10

Control ID value	Meaning	Length of the Control Information subfield (bits)
0	Triggered response scheduling (TRS)	26
1	Operating mode (OM)	12
2	HE link adaptation (HLA)/EHT link adaptation (ELA)	26
3	Buffer status report (BSR)	26
4	UL power headroom (UPH)	8
5	Bandwidth query report (BQR)	10
6	Command and status (CAS)	8
7	EHT operating mode (EHT OM)	6
8	Single response scheduling (SRS)	10
9	AP assistance request (AAR)	20
10	Preemption request (PR)	8
11-14	Reserved	
15	Ones need expansion surely (ONES)	26

1102


1100

Figure 11

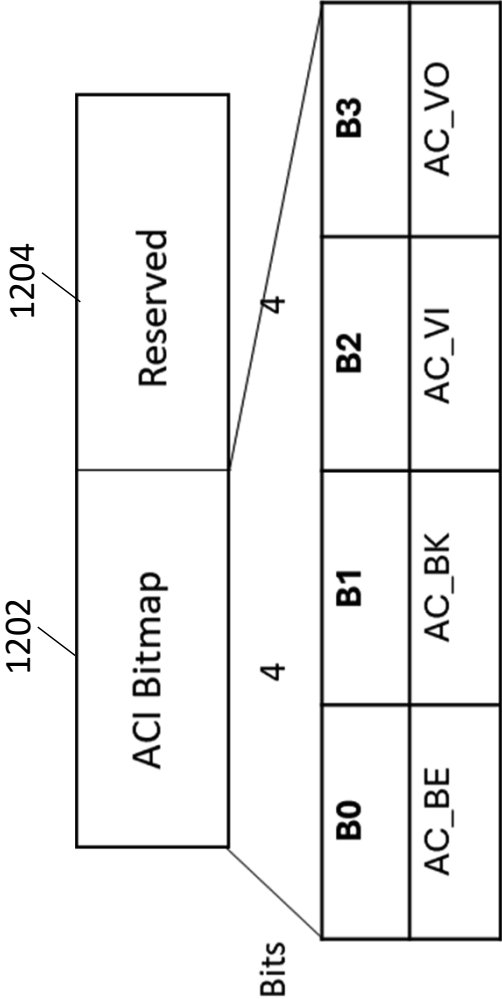

1200 ↗

Figure 12

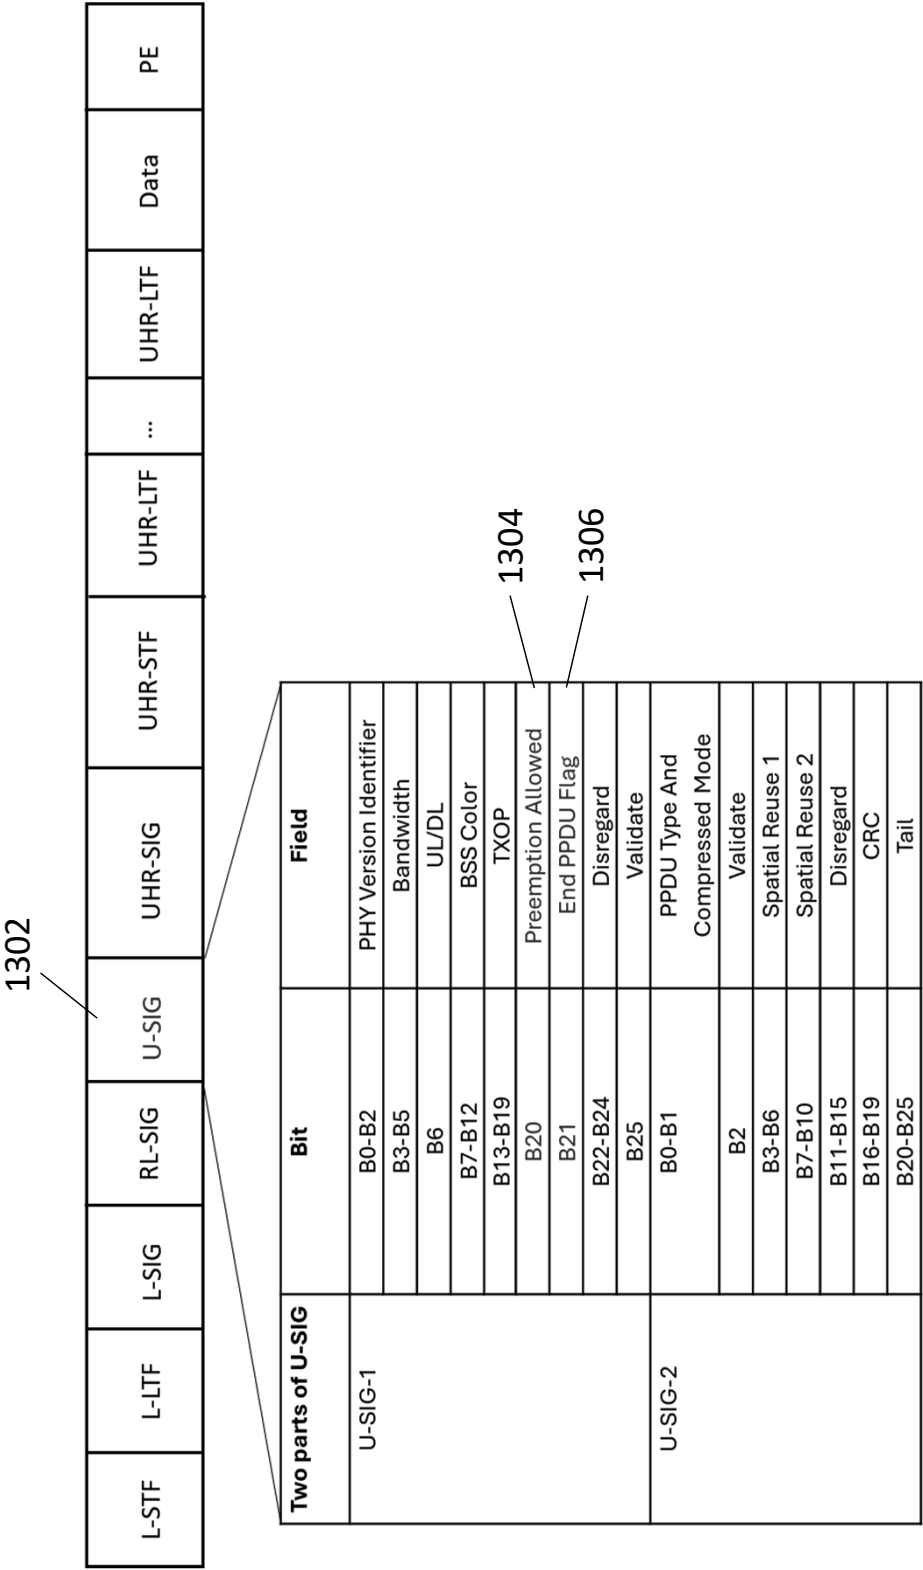

1300

Figure 13

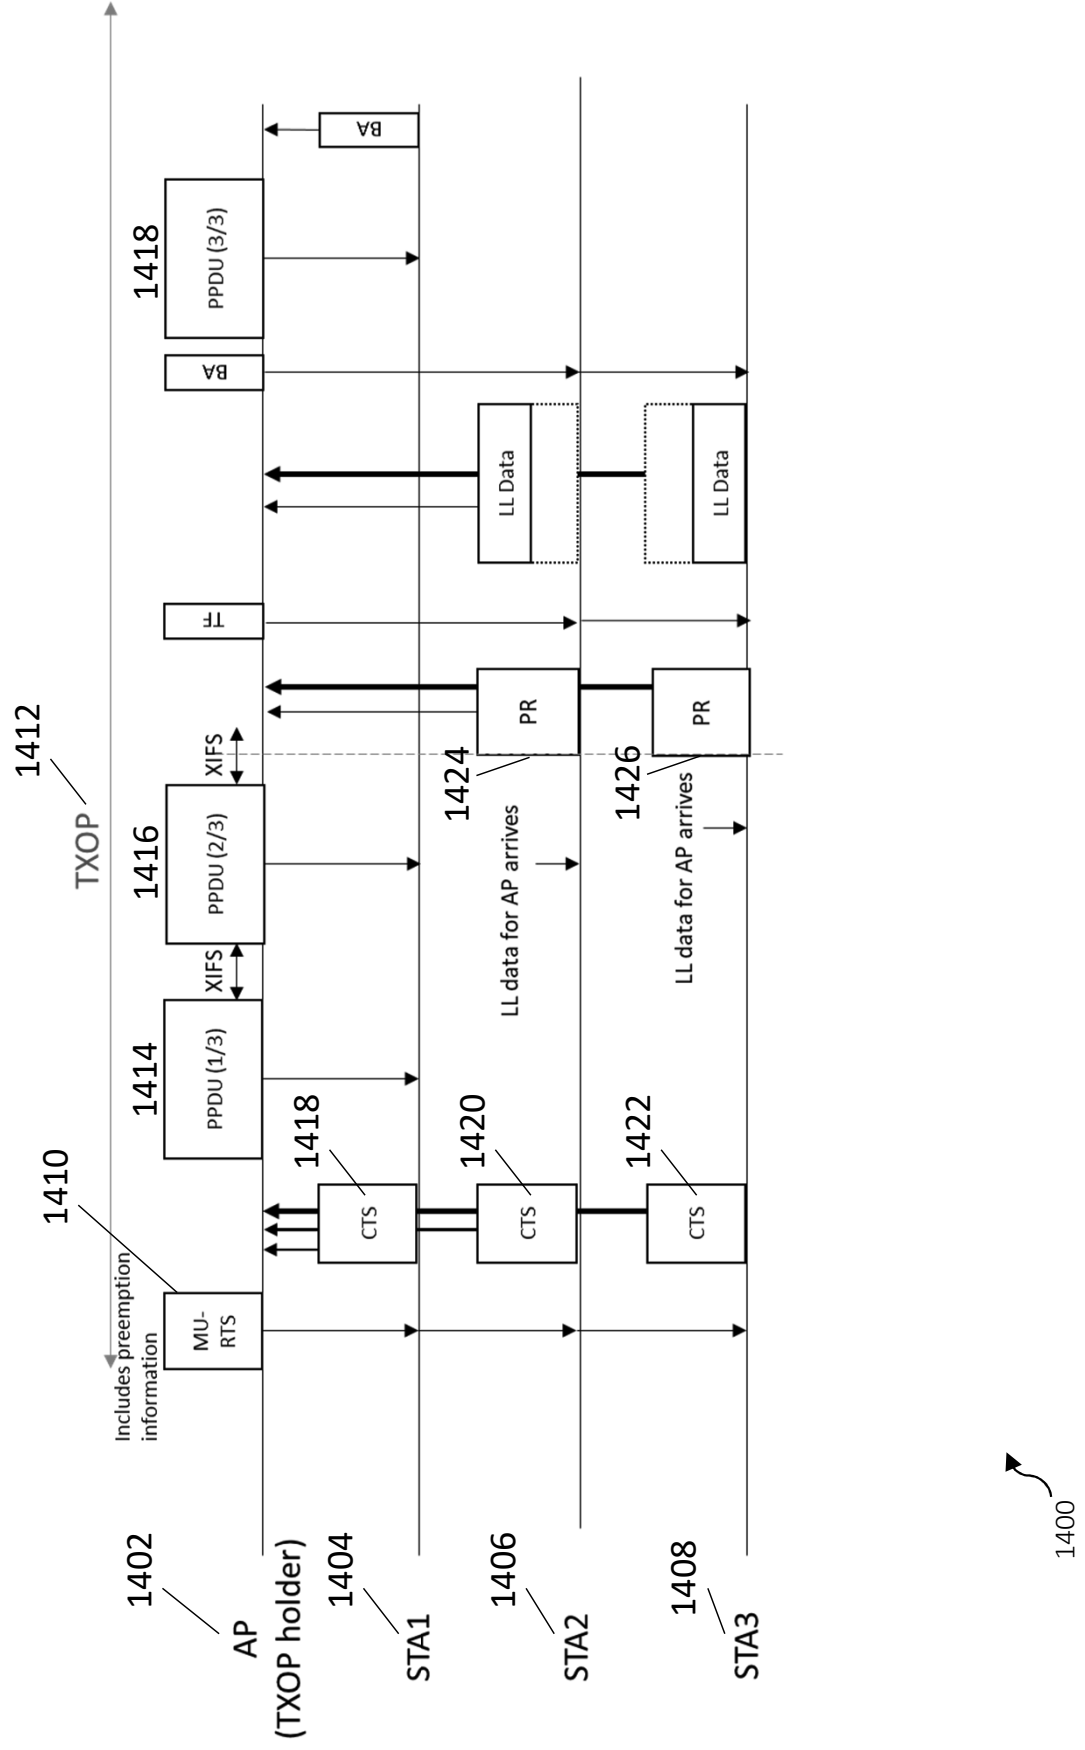


Figure 14

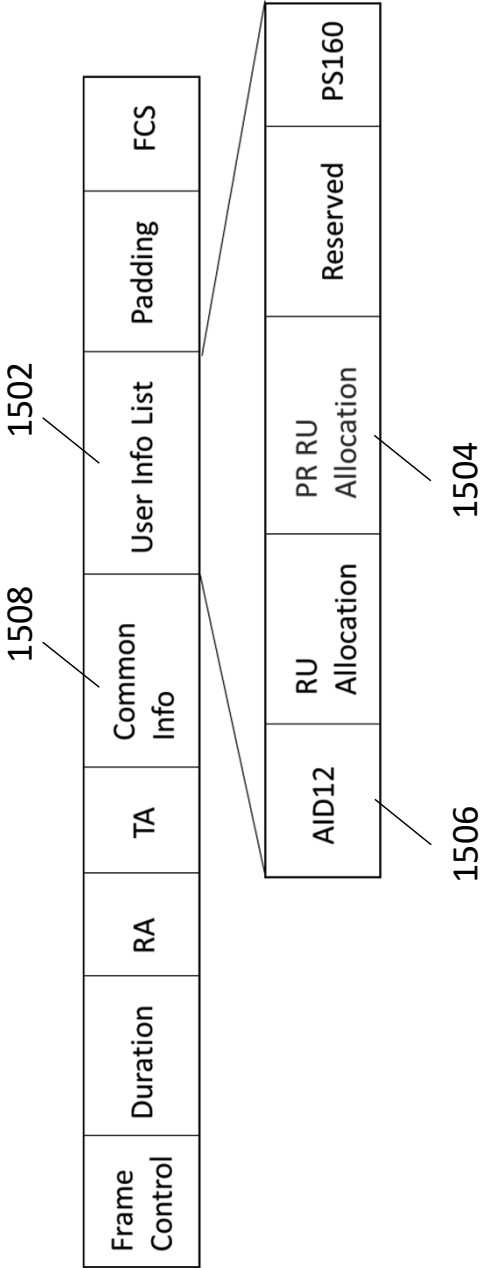


Figure 15

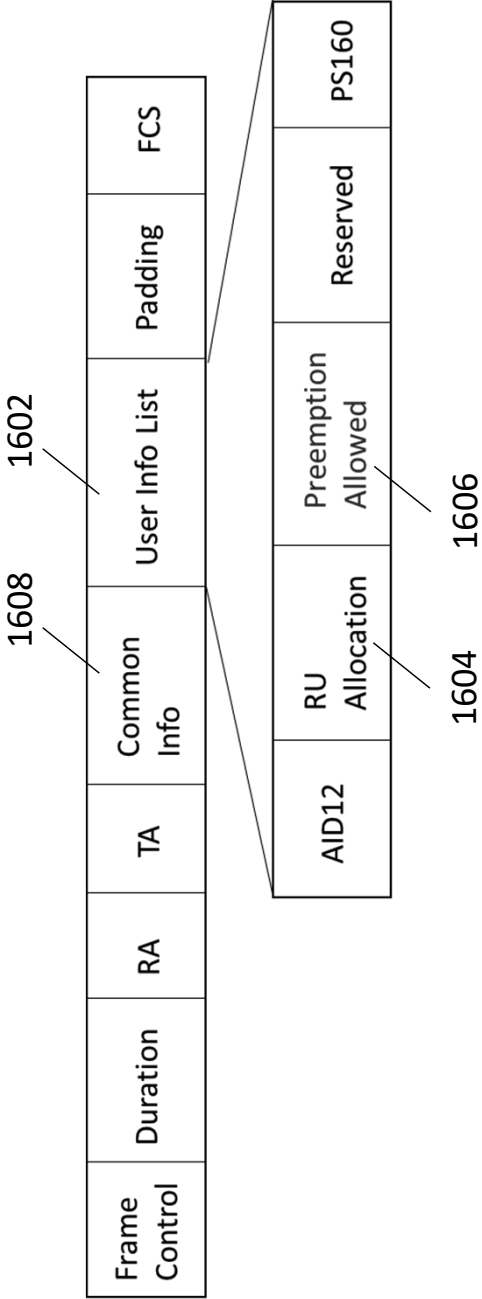


Figure 16

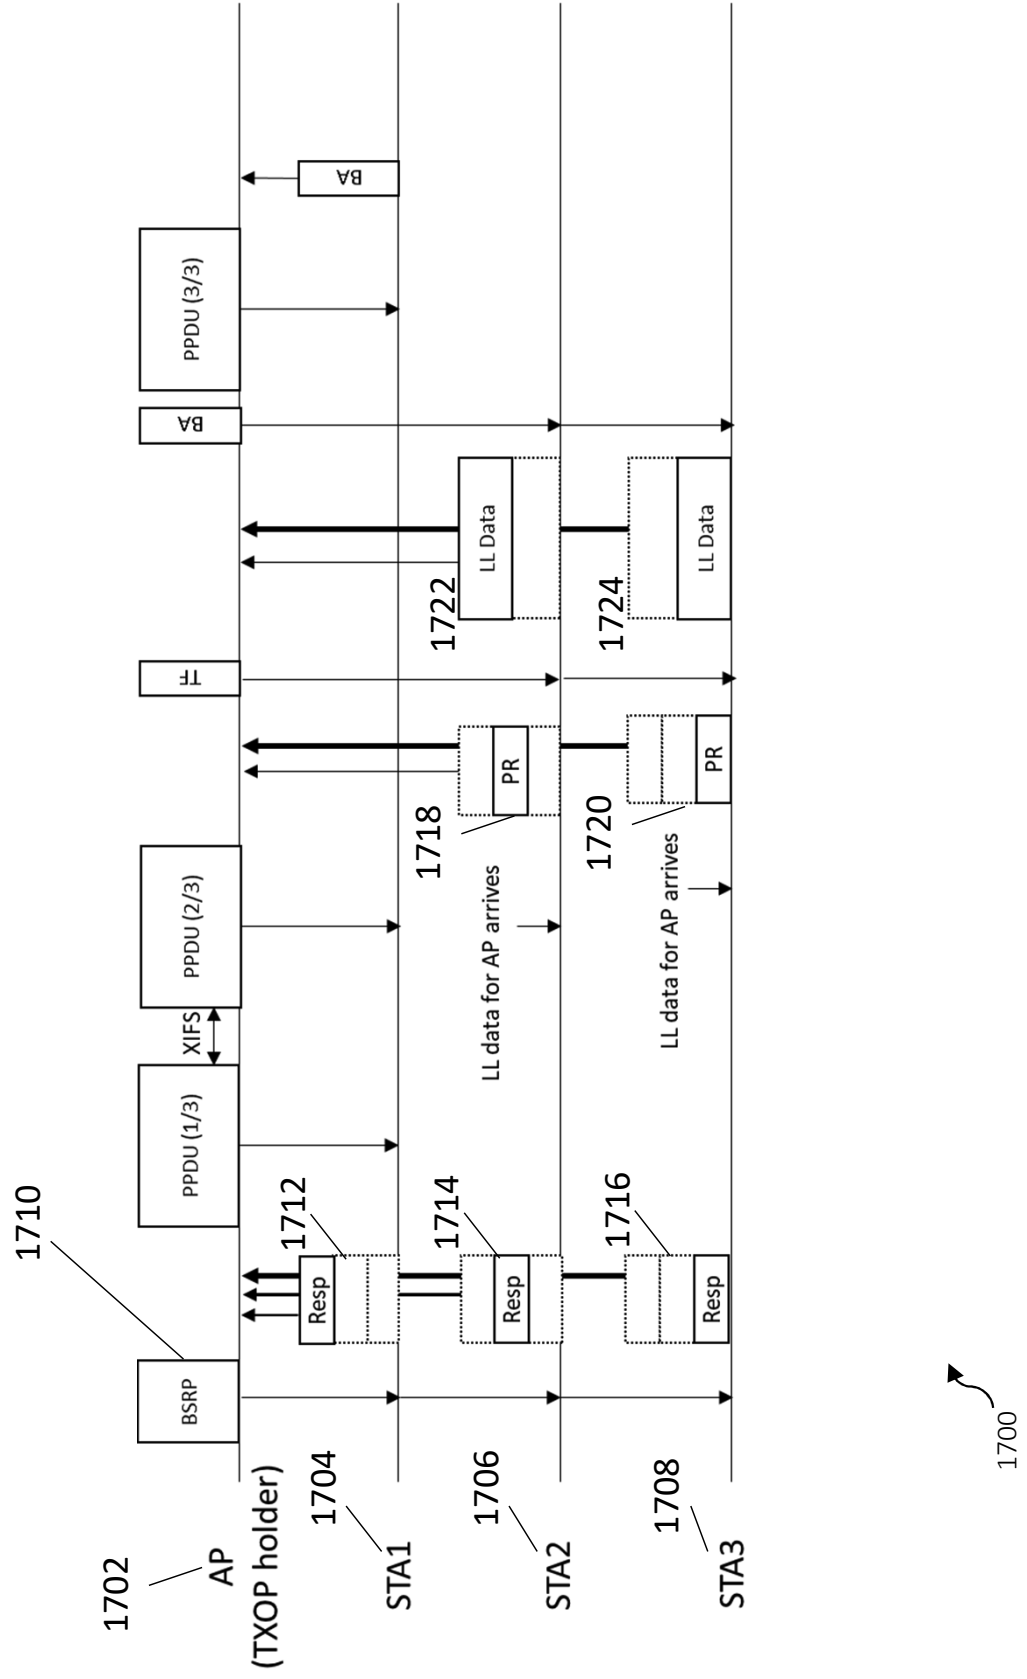


Figure 17

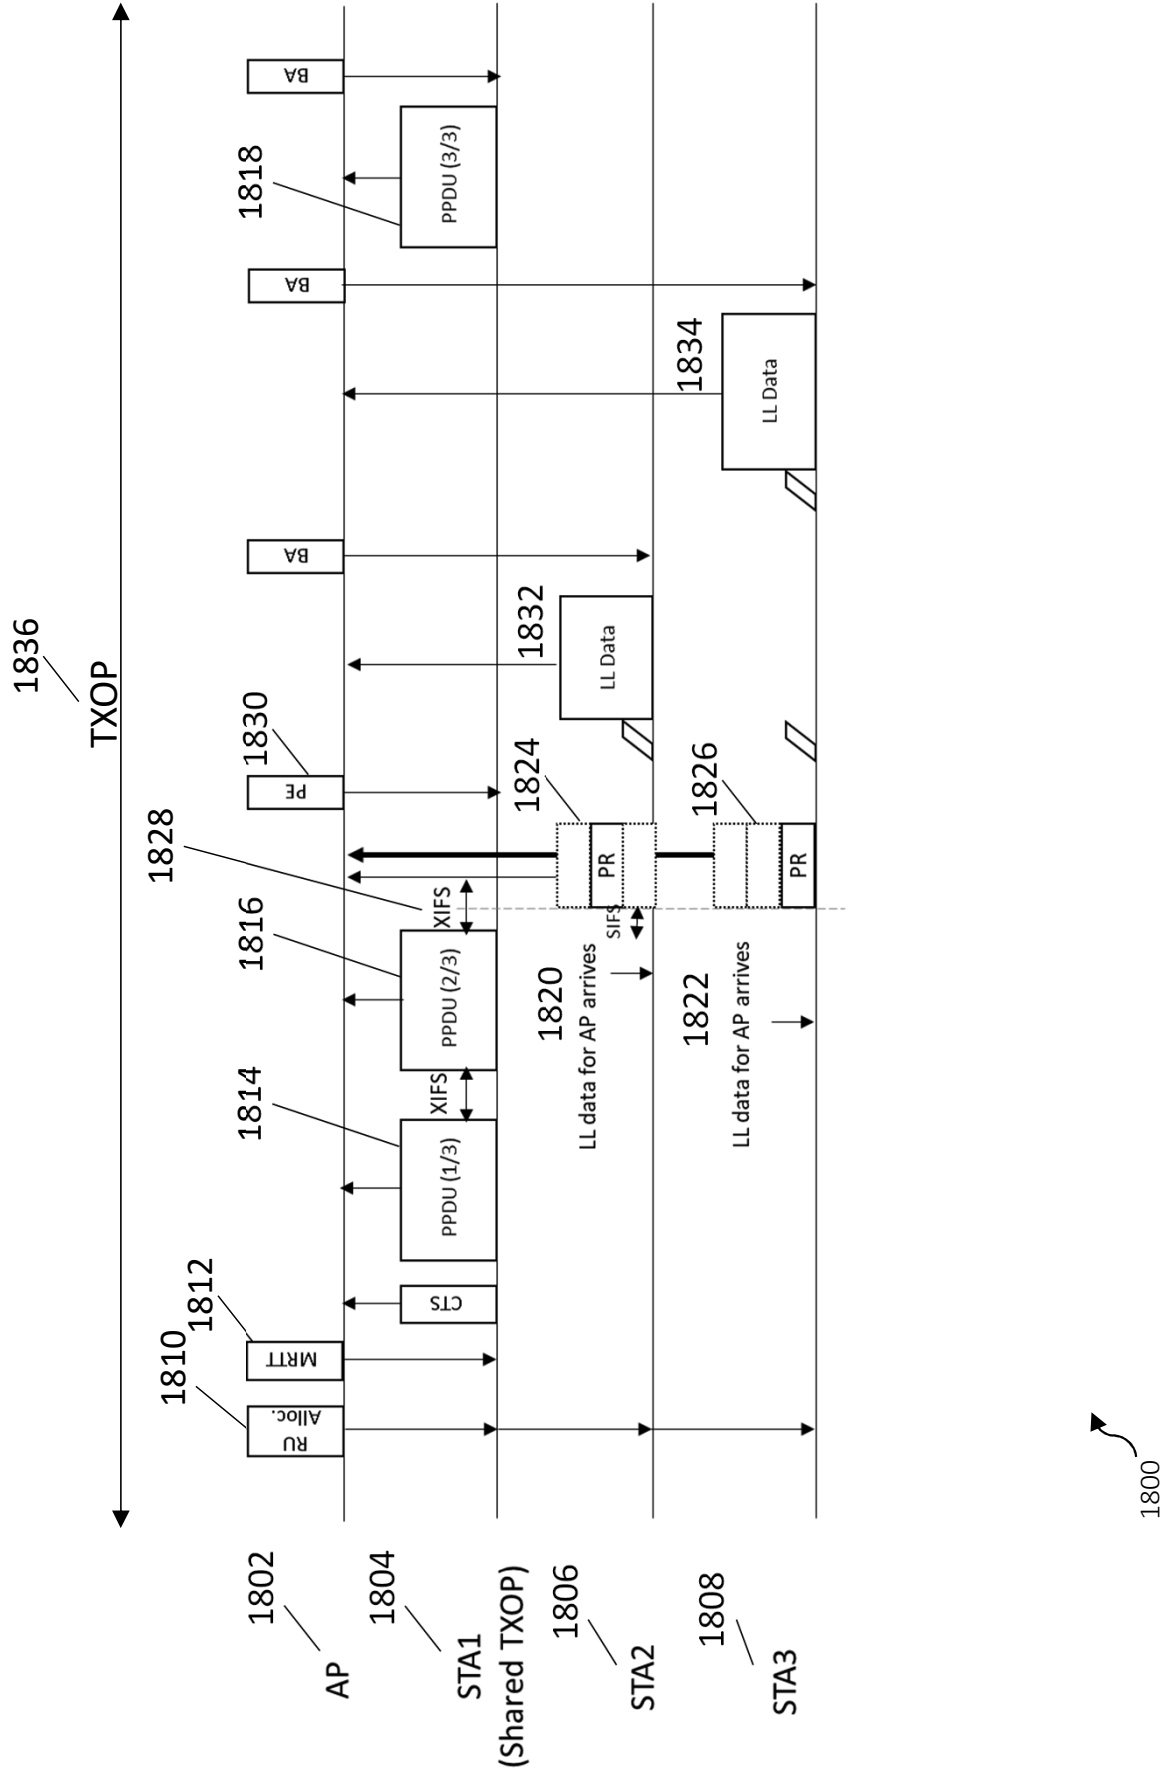


Figure 18


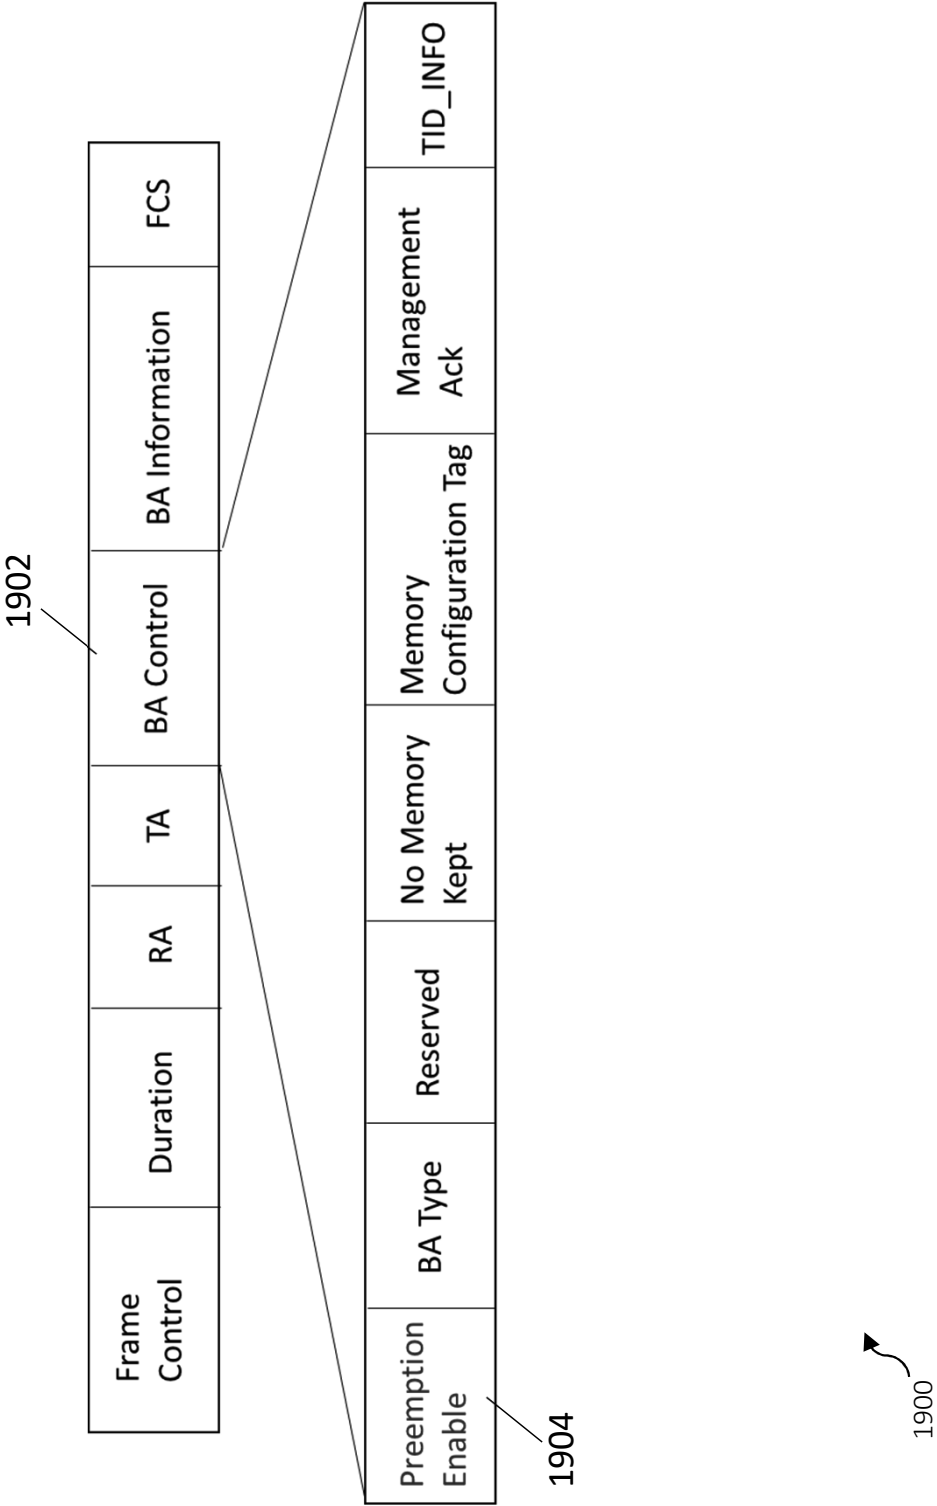


Figure 19

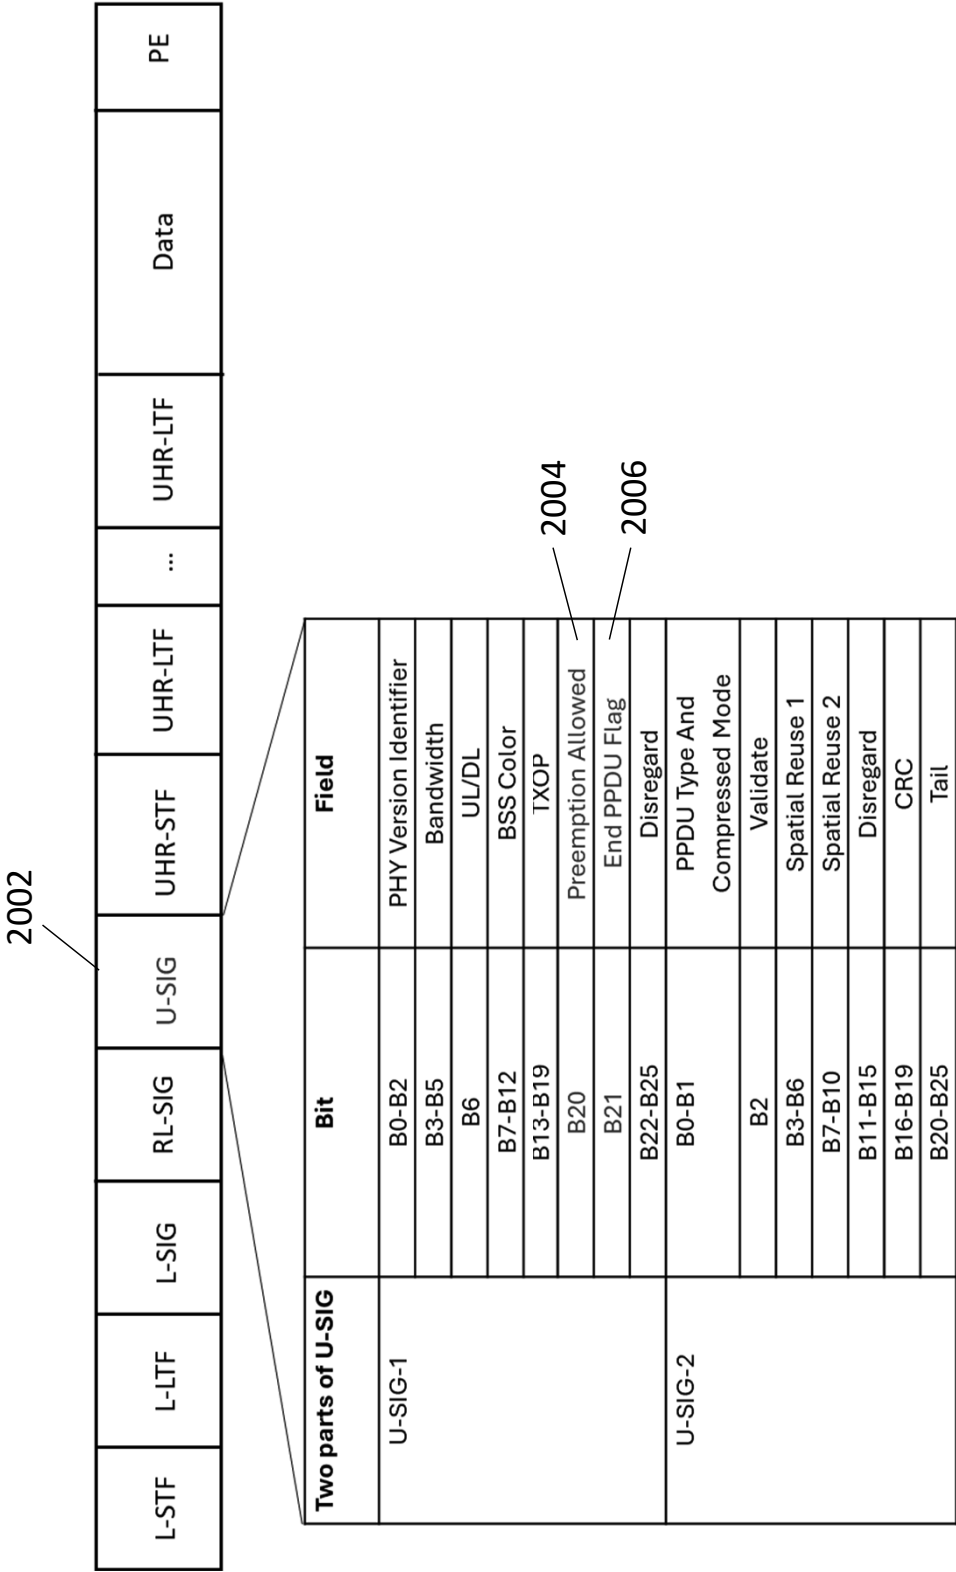

2000

Figure 20

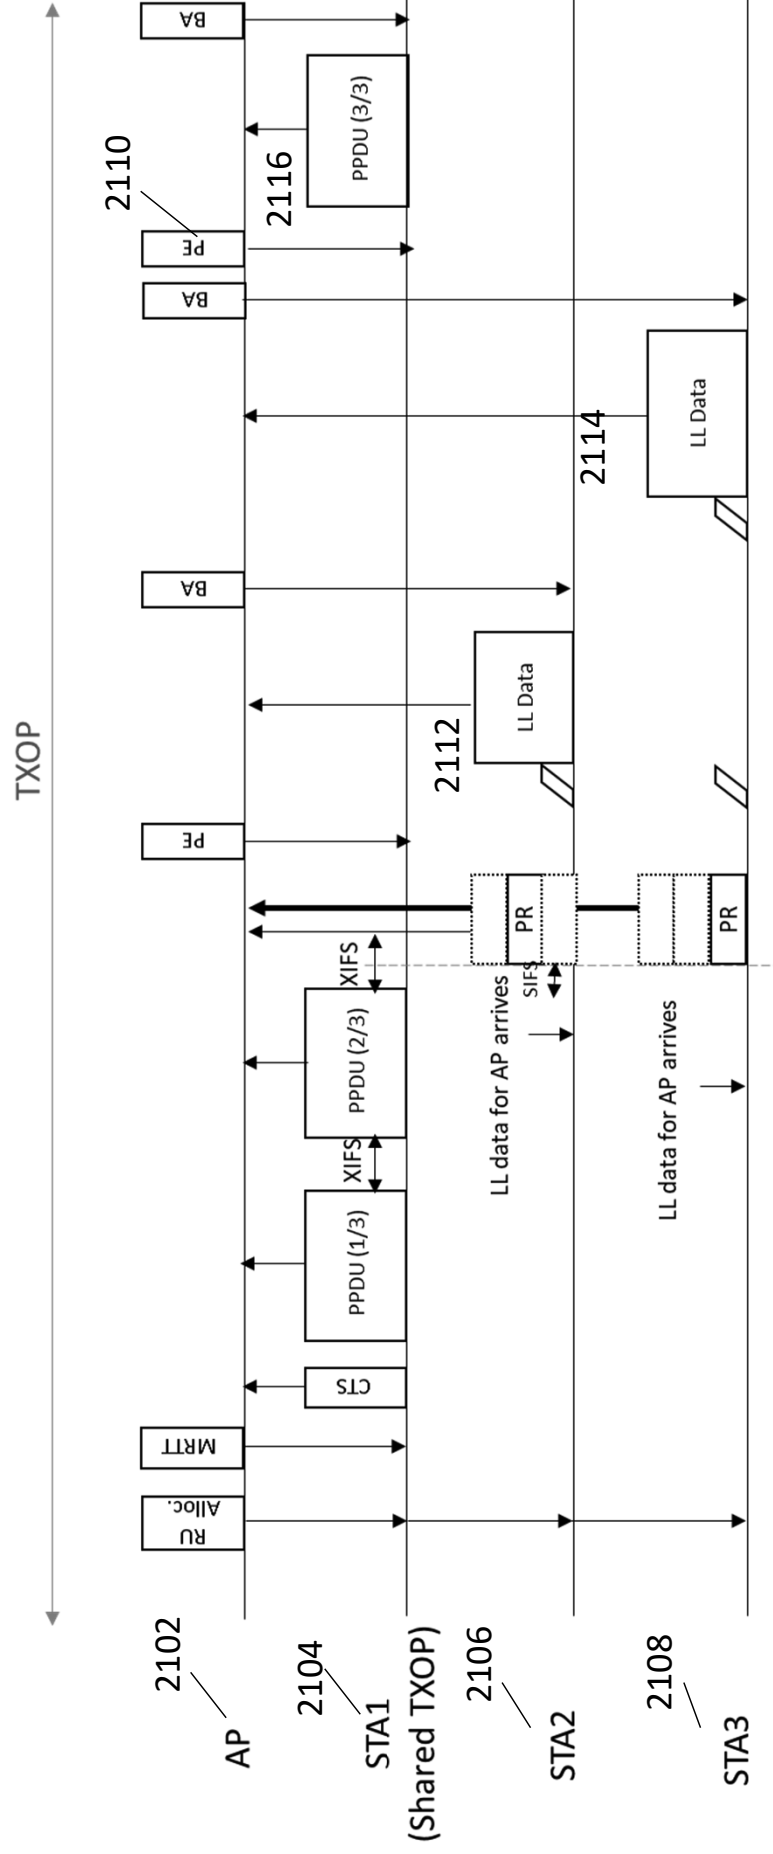


Figure 21

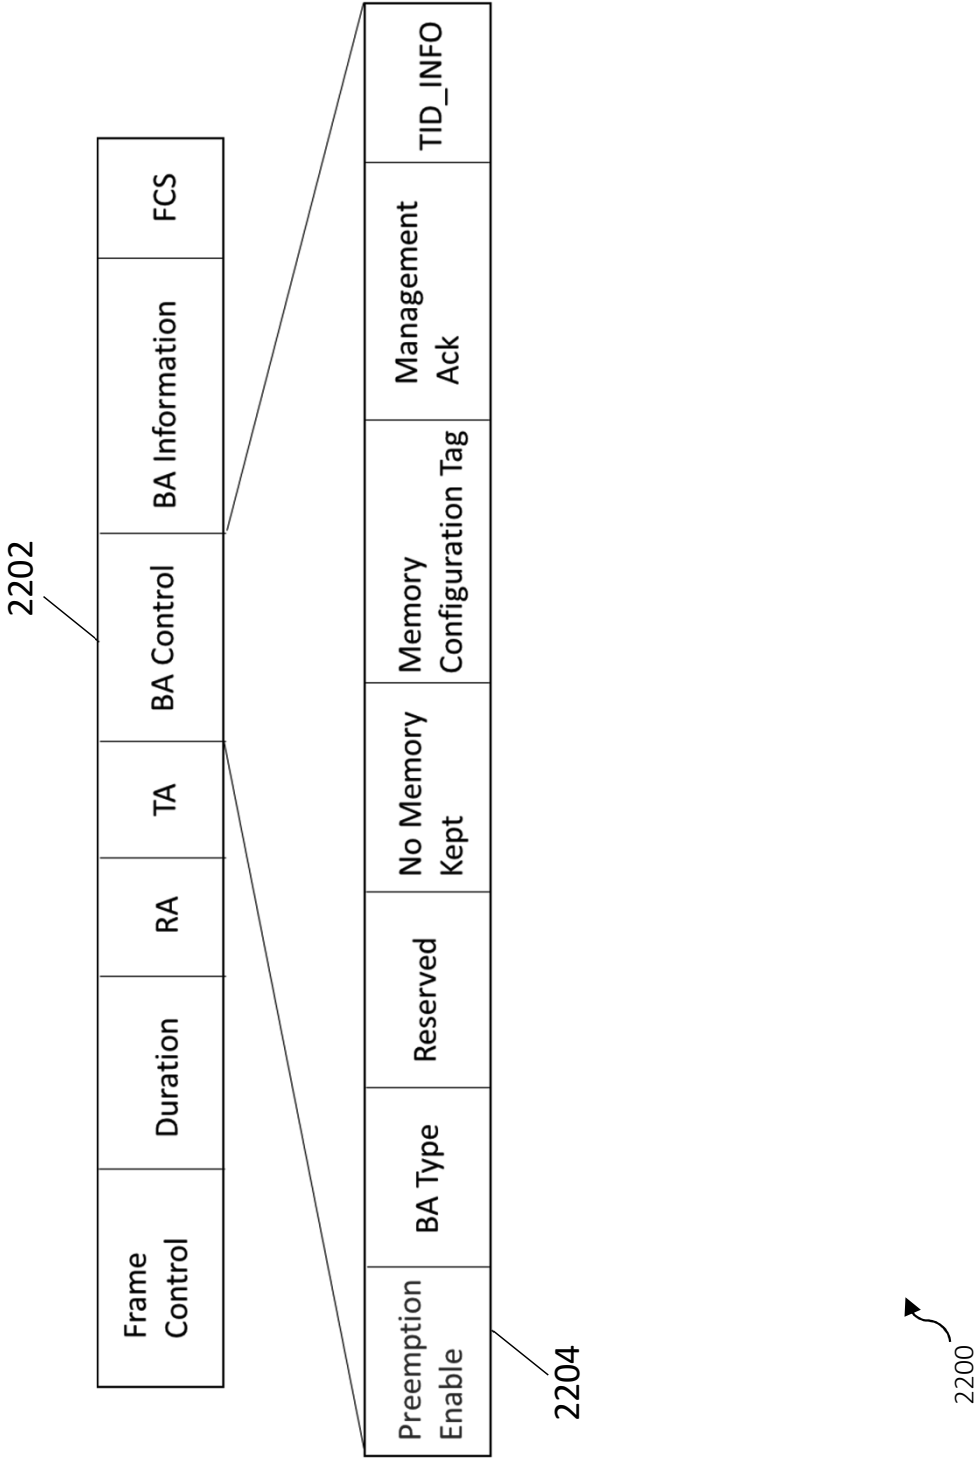
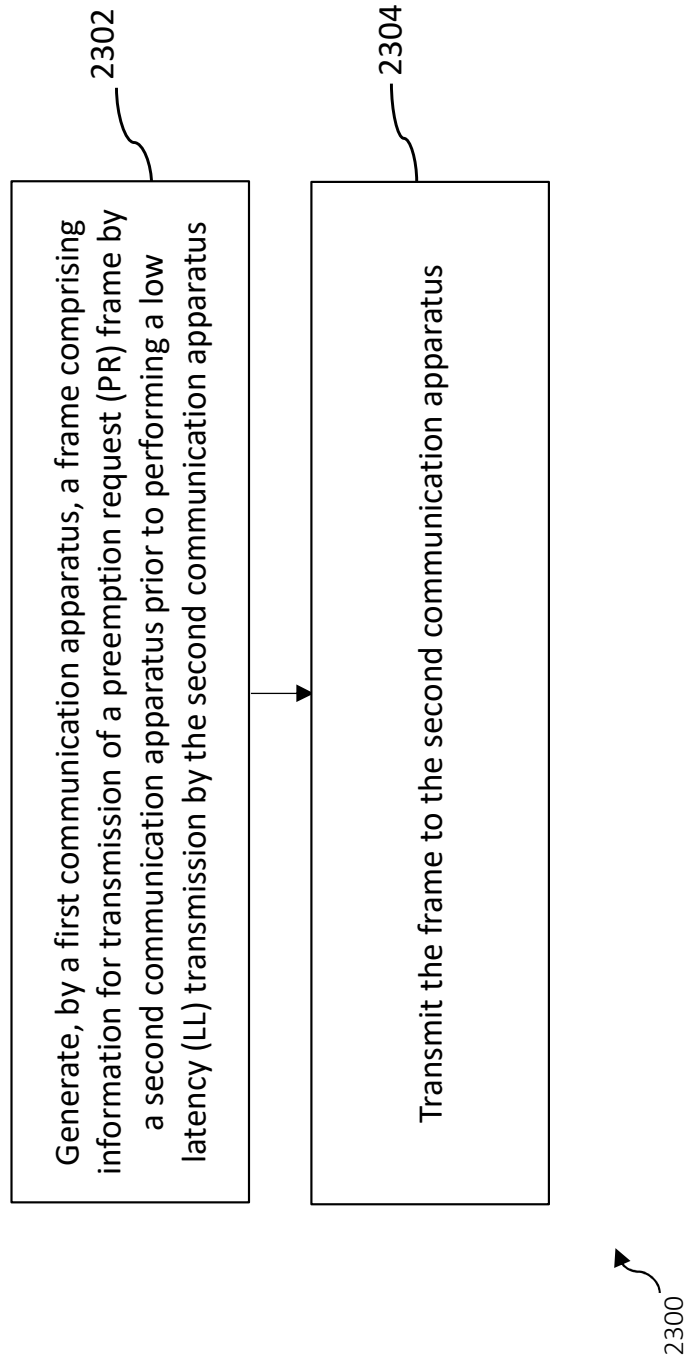
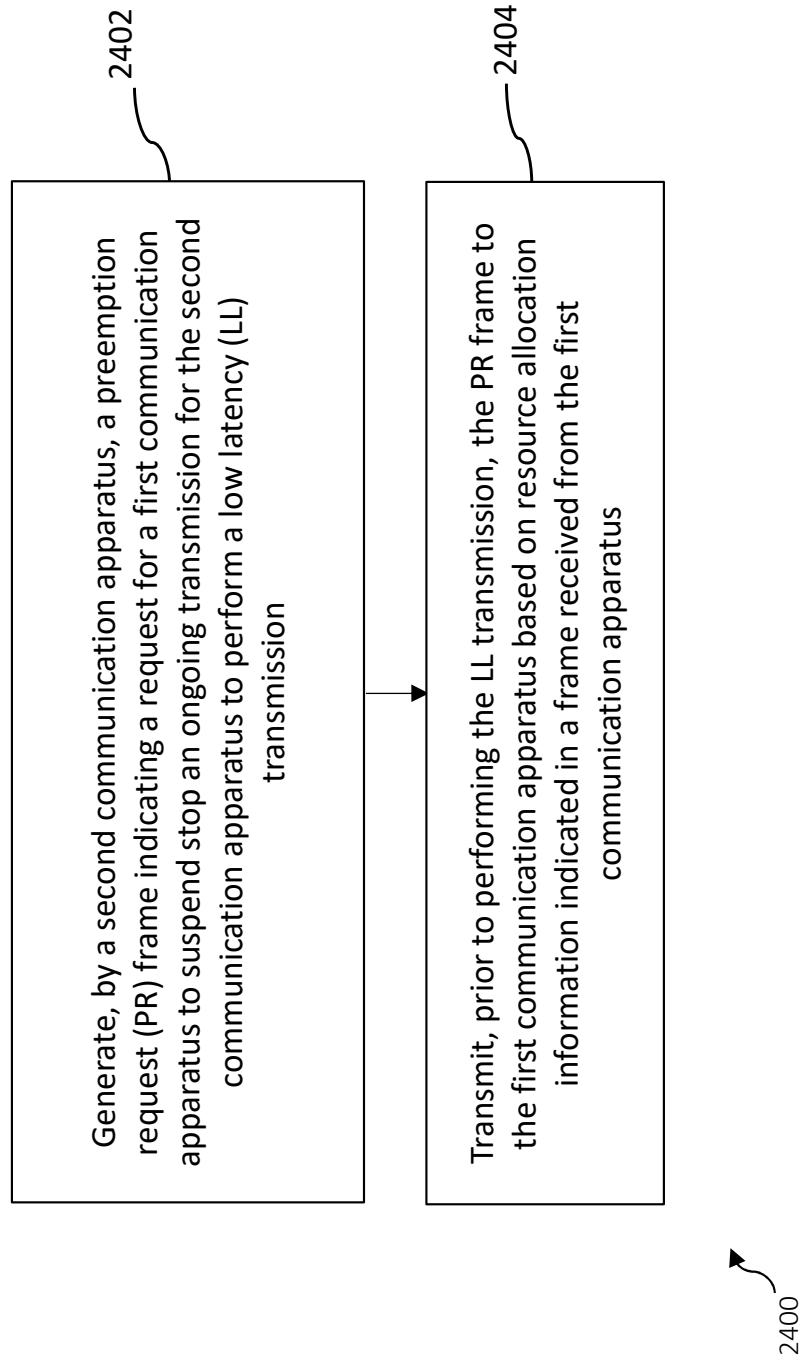


Figure 22

**Figure 23**

**Figure 24**

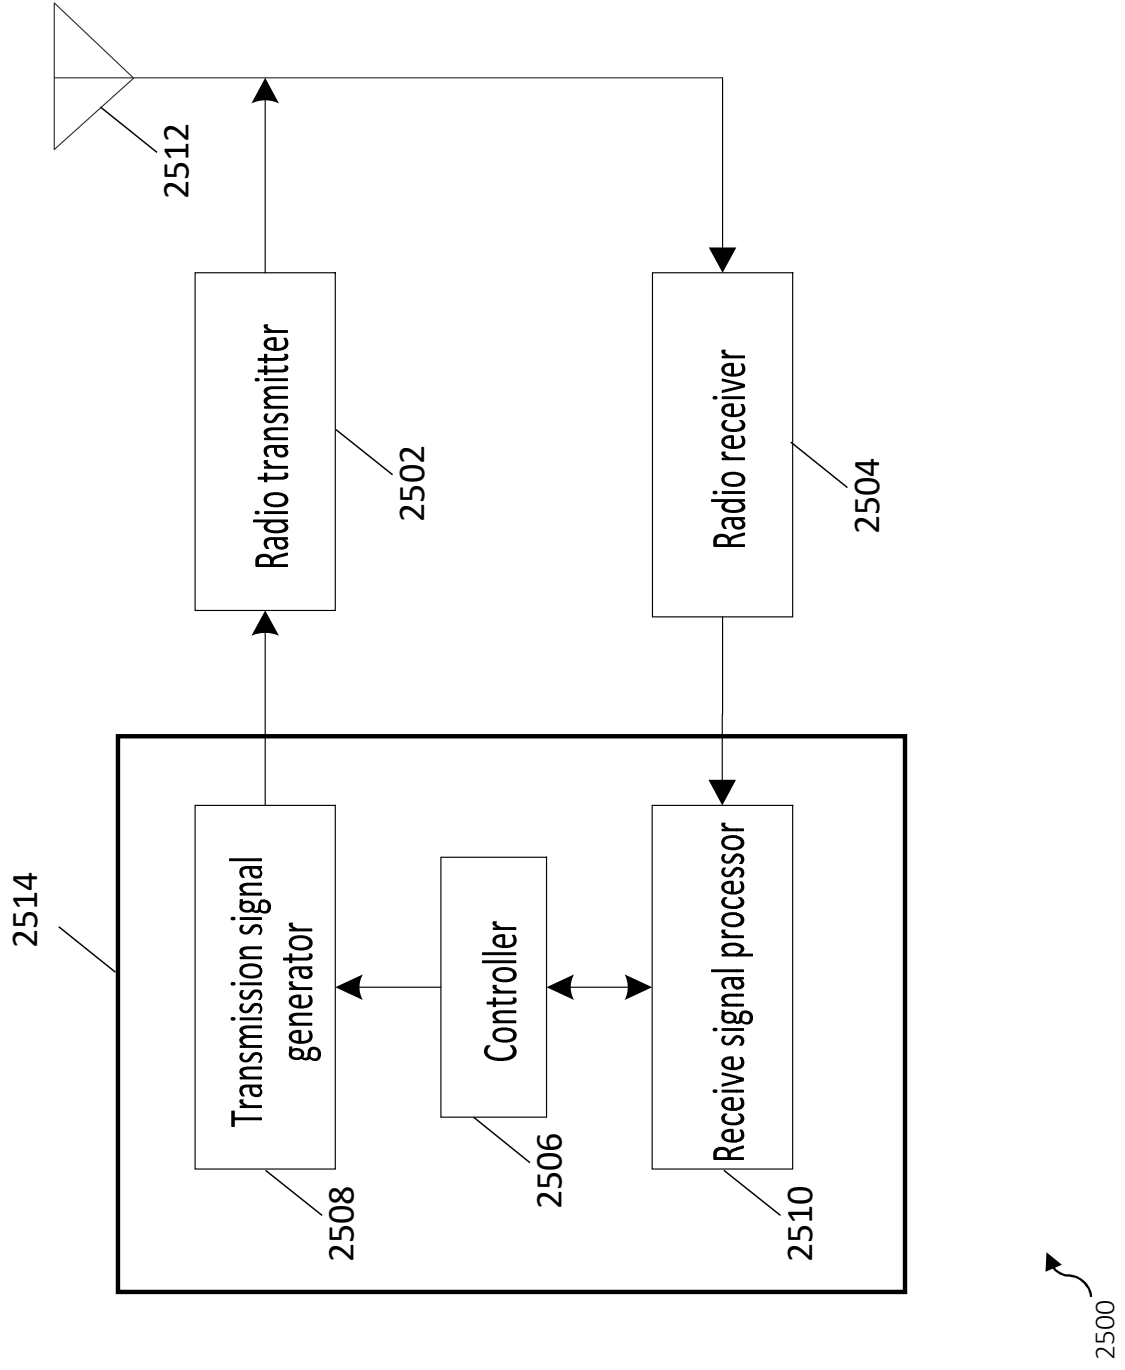


Figure 25