

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 August 2010 (12.08.2010)(10) International Publication Number
WO 2010/090604 A1

(51) International Patent Classification:

H01L 21/66 (2006.01) **G01N 21/956** (2006.01)
G01B 11/24 (2006.01)

(21) International Application Number:

PCT/SG2010/000041

(22) International Filing Date:

8 February 2010 (08.02.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/150,634 6 February 2009 (06.02.2009) US

(71) Applicants (for all designated States except US): **AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH** [SG/SG]; 1 Fusionopolis Way #20-10, Connexis, Singapore 138632 (SG). **COMPONENT TECHNOLOGY PTE LTD** [SG/SG]; 13 Kaki Bukit Road 1, #01-05 Eunos Technolink, Singapore 415928 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LIU, Tong** [CN/SG]; 71 Nanyang Drive, Singapore 638075 (SG). **LAM, Chew Junn** [MY/SG]; 13 Kaki Bukit Road 1, #01-05 Eunos Technolink, Singapore 415928 (SG). **FANG, Zhong Ping** [CN/SG]; 71 Nanyang Drive, Singapore 638075 (SG). **XU, Jian** [SG/SG]; 71 Nanyang Drive, Singapore 638075 (SG). **CHEOW, Yoon Foo** [MY/SG]; 13 Kaki Bukit Road 1, #01-05 Eunos Techno-link, Singapore 415928 (SG). **YU Jiaqi** [CN/SG]; Block 772 Pasir Ris Street 71, #07-364, Singapore 510772 (SG).(74) Agent: **BOGSCH, Adam**; Viering, Jentschura & Partner LLP, P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A LIGHT DETECTION ARRANGEMENT AND A METHOD FOR DETECTING LIGHT IN A LIGHT DETECTION ARRANGEMENT

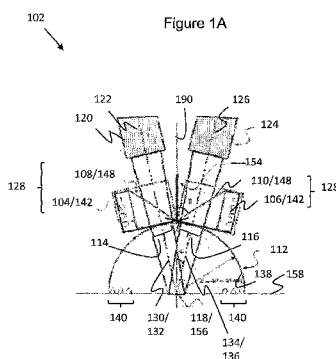

(57) Abstract: In an embodiment, a light detection arrangement may be provided. The light detection arrangement may include a body structure configured to provide light, the body structure including a first light-transmissive portion and a second light-transmissive portion disposed at a distance from the first light-transmissive portion; an object receiving region arranged such that light provided by the body structure may be illuminating at least a portion of the object receiving region; a first camera having a first main optical axis; a second camera having a second main optical axis; wherein the body structure may be arranged between the first camera and the second camera on its one side and the object receiving region on its other side; wherein the first camera may be arranged such that its first main optical axis may be directed to the object receiving region via the first light-transmissive portion; wherein the second camera may be arranged such that its second main optical axis may be directed to the object receiving region via the second light-transmissive portion; an arrangement configured to provide light reflected from the object receiving region such that a first reflected light portion may be provided as a first co-axial light portion aligned to the first main optical axis, and such that a second reflected light portion may be provided as a second co-axial light portion aligned to the second main optical axis. A method for detecting light in a light detection arrangement may also be provided.